



RESOURCES

Top Plate Casters

2-3/8" Top Plate Caster with Polyurethane Wheel

Certifications:




Features:


- Double Ball Bearing Raceway for Long Wear and Added Strength
- With or Without Top Lock Brake
- 1/2" King Pin

Material:

- 4" or 5" Polyurethane Wheel Resistant to Acids & Caustics
- Temperature Range -45° to 180°F
- Nylon Bearing Sleeve
- Zinc Plated
- Polyurethane Wheel

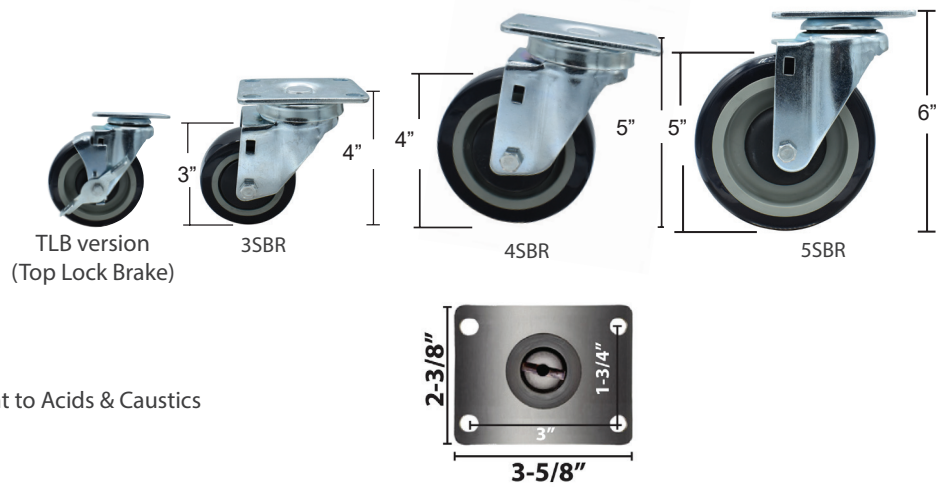

Part Number	Brake	Overall Height	Wheel Size	Capacity
3SBR-1PT-PLY	-	4"	3"	300 LBS
3SBR-1PT-PLY-TLB	TLB	4"	3"	300 LBS
4SBR-1PT-PLY	-	5"	4"	300 LBS
4SBR-1PT-PLY-TLB	TLB	5"	4"	300 LBS
5SBR-1PT-PLY	-	6"	5"	300 LBS
5SBR-1PT-PLY-TLB	TLB	6"	5"	300 LBS
5SBR-1PT-PLY-PS4	TLB	6"	(4)Pack 5" Wheel	300 LBS

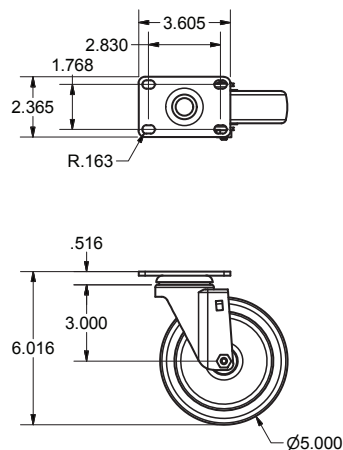

PRODUCT DATA SHEET

RESOURCES



© BK Resources August 2026

Phone: 888-310-4393

Fax: 888-310-4394

Website: www.bk-resources.com

Email: sales@bk-resources.com