

# MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT ON OPEN COMPARTMENT

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0995559

MODELLO  
D94/10CTGSX

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Cast iron centre plate and ring.  
Steel burner controlled by thermocouple safety valve.  
Piezoelectric ignition with liquid-protected push button.  
Adjustable temperature on the plate from 50° to 450°C.  
Thermocouple safety valves with pilot flame.

Thick top plate with removable centre ring.

A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT ON OPEN COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0995559

MODELLO  
D94/10CTGSX

SERIE  
DIAMANTE90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0995559
DEFINITION	D94/10 CTGSX ALLPLATE G V.G.2F SX
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	114,800 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	850,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,990 m3
GROSS PACKING WEIGHT	130,000 Kg
GAS POWER	17,50
GAS POWER (G25.3/25mbar)	15,50
GAS/REFRIGERANT TYPE	GPL 28-30/37 mbar
CERTIFIED MODEL	D94/10 CTGSX

# MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT ON OPEN COMPARTMENT

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....


CODICE  
CR0995559

MODELLO  
D94/10CTGSX

SERIE  
DIAMANTE90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

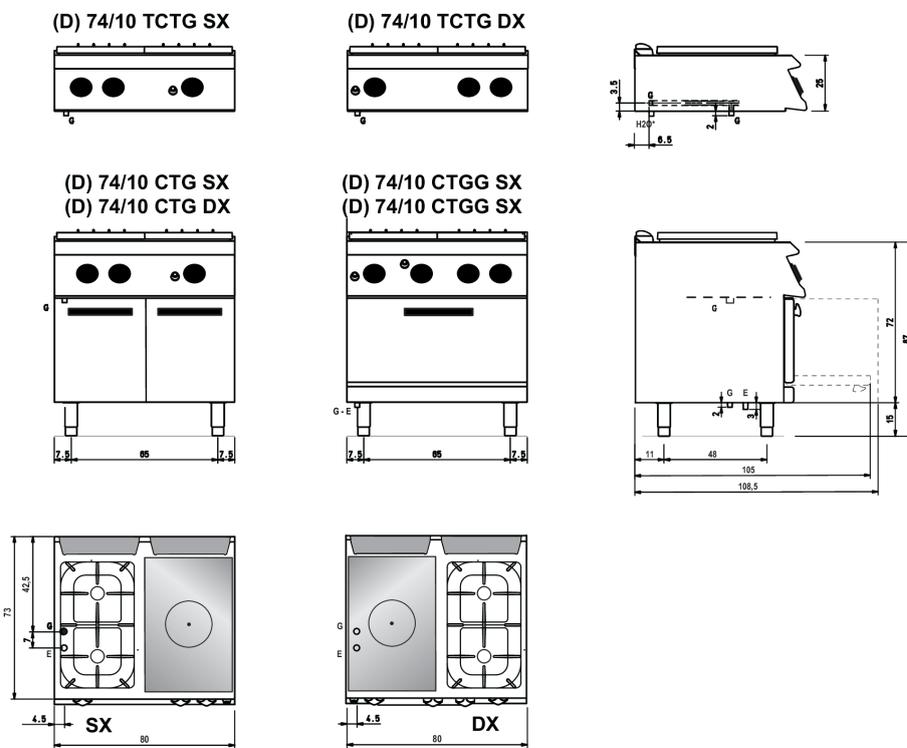

### Legenda - Legende - Key - Légende - Leyenda - Legenda

**G** Attacco arrivo gas - Gasanschluss - Gas connection  
 Arrivée gaz - Union de gas - Gasaansluiting  
**EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**

**H2O\*** Attacco arrivo acqua - Wasseranschluss - Water inlet  
 Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**

# MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT ON OPEN COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....




CODICE  
CR0995559

MODELLO  
D94/10CTGSX

SERIE  
DIAMANTE90

## Product's PLUS

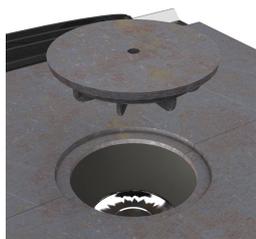

Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT ON OPEN COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0995559

MODELLO  
D94/10CTGSX

SERIE  
DIAMANTE90

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355469	D94/10B	Open base 80cm series 90
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592679	94/10 BH	Open base - hygienic finish H2 80cm series 90
CR1353569	DRG21	
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment