



REMOTE PASS-THRU BACK BAR REFRIGERATOR

Remote back bar refrigerators allow customers to mount the compressor in an alternate location, ideal for remote servicing & noise isolation.

Job:
Area:
Item #:
Model #:



PTR72 shown



PTR48 shown



REMOTE PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBER
PTR48
PTR72

Feature-Benefits

- Remote back bar refrigerators allow customers to mount the compressor in an alternate location, ideal for remote servicing and noise isolation
- Easy access from both sides with traditional or self-closing sliding glass doors
- All stainless steel interior with stainless steel or all black exterior for long life durability and easy to clean hygienic storage
- 2" Foamed-in-place insulation provides energy savings using Ecomate™, a blowing agent that has zero-ozone depletion and zero global warming potential
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- Multiple door styles available in any compartment
 - Choose between glass, stainless steel, black, or customer provided overlay
 - Drawers not available on remote models
- Choose between all stainless or all black handles and door locks.
- Integrated door locks standard on all units
- Optional condensing units available
- Choose between 6000K white LED lighting or cool blue display lighting
- Choose between flat shelving and wine racks for each compartment
- Choose between full length, 6" chrome, or pull tab style handles
- 1 Year parts and labor warranty, 5 year compressor warranty



800.558.5592

perlick.com



MODEL NUMBERS - PTR48, PTR72

REMOTE PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBERS		PTR48	PTR72
NUMBER OF DOORS		4	6
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	48 (1219)	72 (1829)
	Depth - in. (mm)	26 ¹ / ₁₆ (678)	26 ¹ / ₁₆ (678)
	Height - in. (mm)	34 ⁷ / ₁₆ (878)	34 ⁷ / ₁₆ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)	68 (1727)
	Depth - in. (mm)	18 ³ / ₄ (476)	18 ³ / ₄ (476)
	Height - in. (mm)	28 ¹ / ₂ (724)	28 ¹ / ₂ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		16.6 (470)	25.7 (728)
PRODUCT CAPACITY	Case Packed - 12 Oz. Bottle/Can	321/513	523/819
	Staggered - 12 Oz. Bottle/Can	346/549	565/879
SHIPPING WEIGHT Lbs. (kg.)		358 (117)	385 (175)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.6	2
	Electrical Connection	Hard wired	Hard wired
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Lighting Type	LED	LED
REFRIGERATION SPECIFICATIONS	Expansion Device	TXV	TXV
	Evaporator Capacity - Remotes	1900 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R404a	R134a & R404a
PLUMBING	Evaporator Condensate	Field plumbed	Field plumbed

Wine Temperature refrigerators do not carry NSF Rating for open food storage.

Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.




800.558.5592

perlick.com



MODEL NUMBERS - PTR48, PTR72

REMOTE PASS-THRU BACK BAR REFRIGERATOR

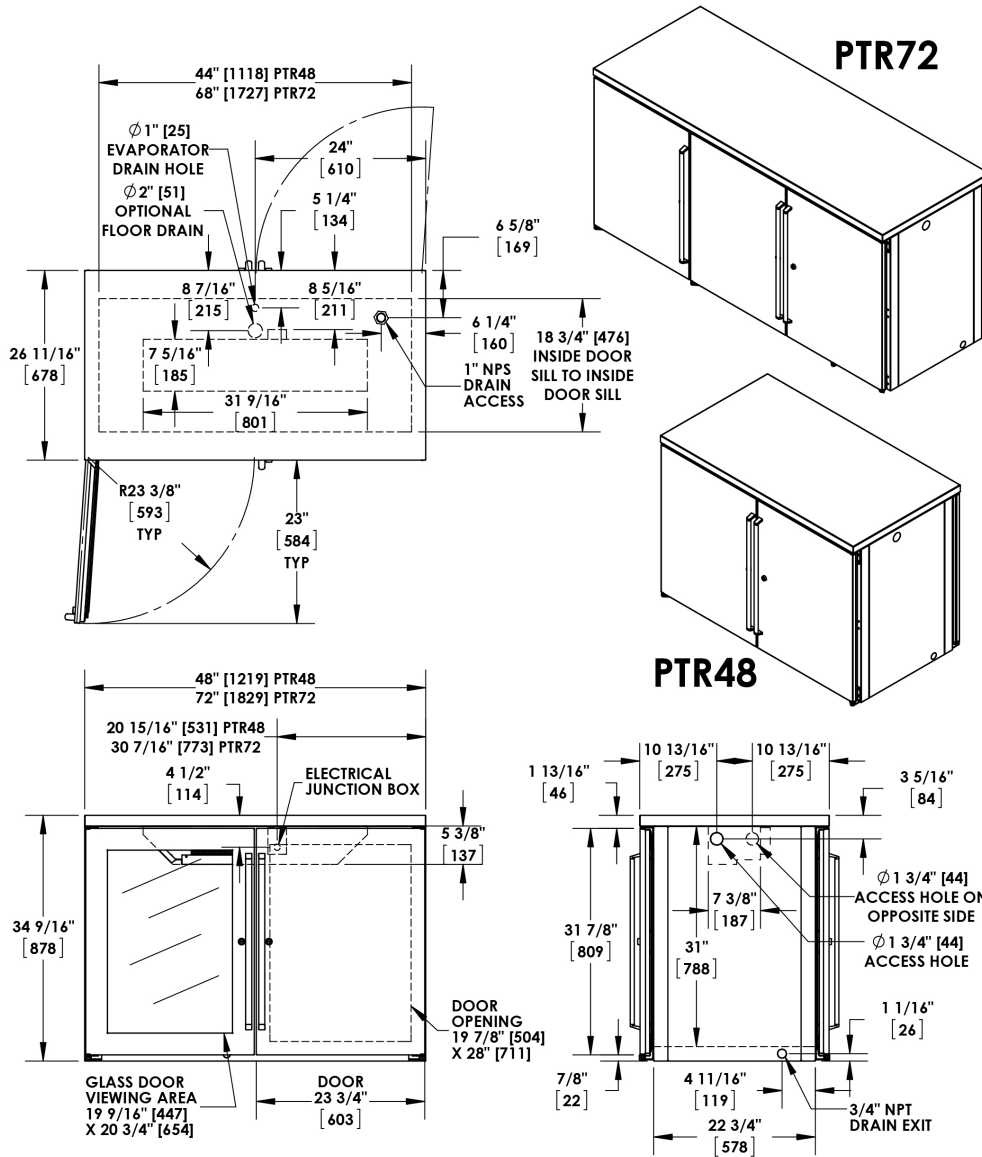

WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at perlick.com. Or to find out more about Prop 65, go to P65Warnings.ca.gov.



800.558.5592

perlick.com