

INDIRECT GAS COOKER 140LT. WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1356019

MODELLO
D94/10PGI14AS

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 304 stainless steel tanks with AISI 316 bottom.
Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.
Frontal drain by means of 2" chrome-plated brass faucet.
Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).
Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.
Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Possibility of hot or cold water loading

Stainless steel tank with aisi 316 bottom

Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

INDIRECT GAS COOKER 140LT. WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1356019

MODELLO
D94/10PGI14AS

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356019
DEFINITION	D94/10 PGI14A S PE.GAS IND,M80C/VAL140LA
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	160,000 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	850,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1260,000 mm
PACKAGE VOLUME	1,105 m3
GROSS PACKING WEIGHT	176,400 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,275 kW
GAS POWER	24,00
GAS POWER (G25.3/25mbar)	22,50
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 PGI14A

INDIRECT GAS COOKER 140LT. WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:




CODICE
CR1356019

MODELLO
D94/10PGI14AS

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

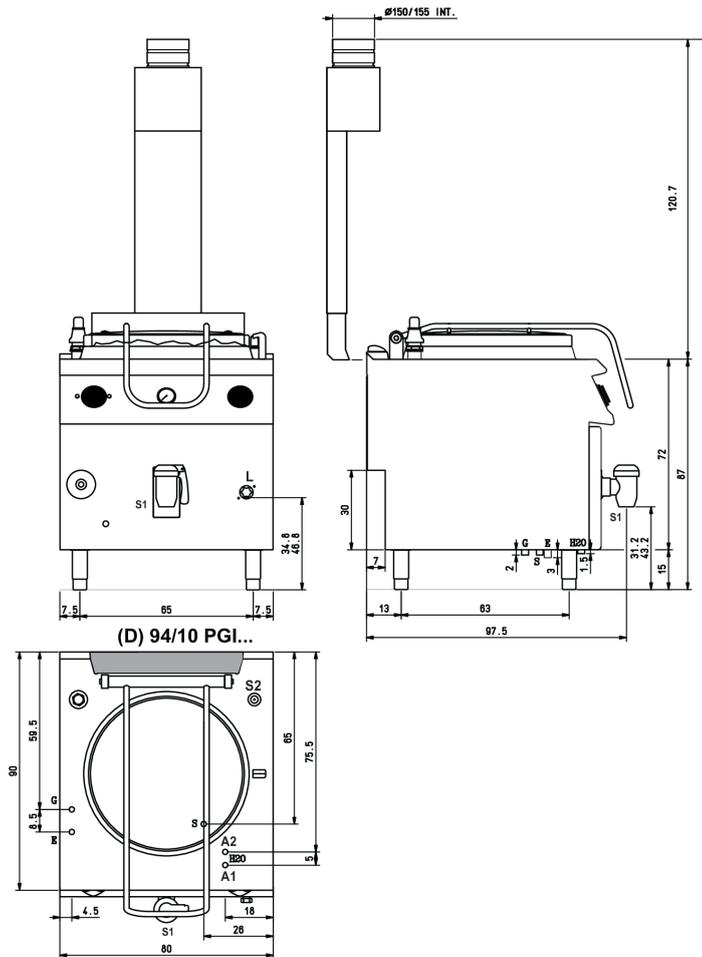

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting
A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm
A2 = Fredda - Kalt - Cold - Froid - Fria - Koude
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwarteil
- G** Attacco arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain
 Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte
EN ISO 10226-1 R 3/4
- S1** Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting
 2"

11

INDIRECT GAS COOKER 140LT. WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1356019

MODELLO
D94/10PGI14AS

SERIE
DIAMANTE90

Product's PLUS

Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.



Possibility of hot or cold water loading



Stainless steel tank with aisi 316
bottom



Indirect pans with automatic
condensate drain valve

INDIRECT GAS COOKER 140LT. WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1356019

MODELLO
D94/10PGI14AS

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
MA97350900	9C10	
MA97351000	9C15	
MA97352000	9CV10	
MA97353000	9CV15	
MA97349000	9-I5	
MA97354000	9-I10	
MA97355000	9-I15	
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment