DISPLAY PASS-THRU REFRIGERATOR

Model: 3RENPTHD-GD-SD

Natural Refrigerant R-290 Model

3-Section Display Extra-Wide Pass-Thru Refrigerator with Half Glass Doors on Front, Half Solid Doors on Rear

3RENPTHD-GD-SD - Stainless steel front, aluminum end panels and interior
3RENSAPTHD-GD-SD - Stainless steel exterior, aluminum interior
3RENSSPTHD-GD-SD- Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Additional epoxy coated steel shelves	Special electrical requirements (consult factory)
Chrome or stainless steel shelves	Adjustable legs and Caster options
Wine rack	Rehinging of doors (consult factory)
Pan slide assemblies	Custom laminates

Consult factory for other model configurations, options and accessories.

Continental® Refrigerator

WARRANTY 7 Year Parts & Labor 7 Year Compressor

Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

- Self contained, performance rated "plug" refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant[1]
- Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"
- Automatic, hot gas condensate evaporator
- Expansion valve system

CABINET ARCHITECTURE

- 3" non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handles
- Triple-pane, tempered hinged glass doors
- Cam action, lift off hinges
- Self-closing doors
- Magnetic snap in Santoprene™ door gaskets
- Cylinder lock in each door
- Heavy duty, epoxy coated steel shelves
- Heavy duty pilaster strips
- 5" casters

MODEL FEATURES

- LED interior lighting
- Electronic control, off cycle defrost
- Top and side air distribution ducts
- Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

[1] R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	75 (2124 l)
Width, Overall (inches)	85 ½ (2172 mm)
Depth, Overall (inches) (including handles)	38 ¾ (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	84 (2134 mm)
Clear Door Width (inches)	21 ⅞ (556 mm)
Clear Door Height (inches)	58 ⅝ (1489 mm)
Height, Overall (inches) (including 6" legs)	82 ¼ (2115 mm)
Number of Doors	12
Number of Shelves	12
Shelf Area (square feet)	61.2 (5.7 sq m)
Tray Slide Capacity (per section) (2" centers)	24

REFRIGERANT DATA

Condensing Unit Size (H.P.)	½
R-290 Refrigerant Charge (oz)	4.8
Capacity (BTU per hour)*	4200

ELECTRICAL DATA


Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	9.9 (4.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA


Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu l)
Weight Std - Crated (pounds)	860 (391 kg)
Weight SS - Crated (pounds)	985 (447 kg)

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

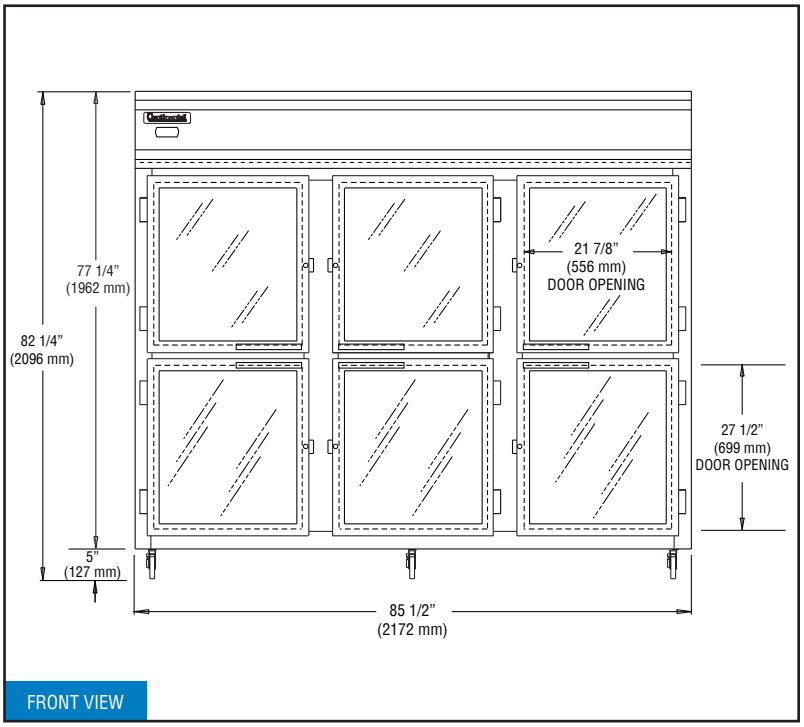

FRONT VIEW

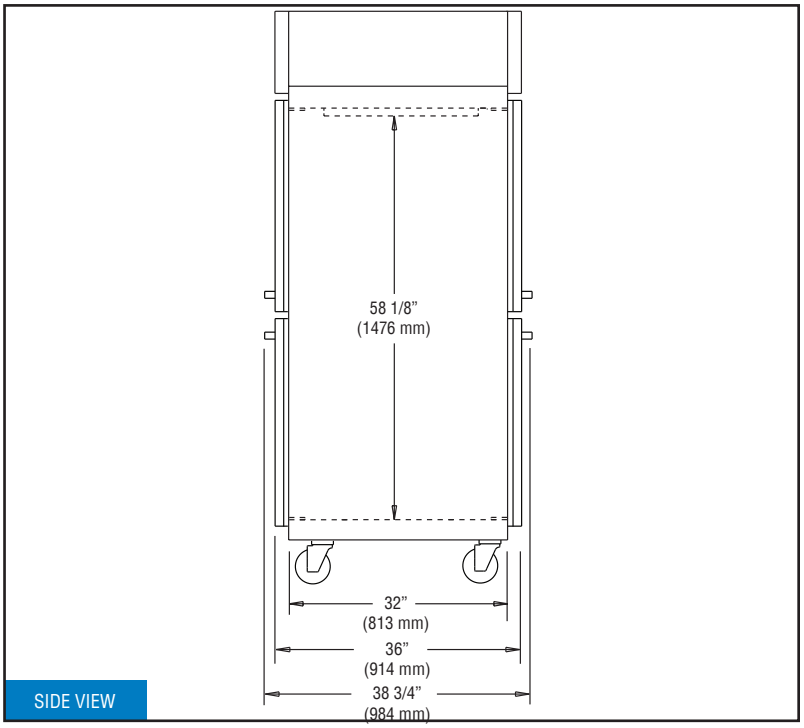

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.

Continental Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A.

Equipped with one NEMA-5-15P Plug
(varies by country)

REVISED: 1/7/26

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.