Share the taste

Data sheet
UBAVR48DX



Constructive Features
- chilling tank in AISI 316
- perforated basket in stainless steel AISI 316 (thickness 15/10) and removable for cleaning operations
- supporting structure in stainless steel AISI 304 (thickness 20-30/10)
- external panels in AISI 304 fine satin finish
- pivoting wheels, 2 with brakes

Functional Features General
- lifting up and down of the basket inside the cooling tank with electric tilting
- forced water activation by means of of dedicated pump, operating only with baskets in working position and valve regulation flow
- filling and recirculation of water in the vat by ball valve
- overflow device and discharge valve in stainless-steel, 2 inc., with insulating handle

Panel Board Functions
- ON/OFF switch
- basket tilting and return
- ON/OFF switch agitation pump
- flow agitation regulation

Safety System
- thermal protection for agitation pump (light alarm)

Optionals
- NOT PRESENT

Accessories
- NOT PRESENT

Certificates
Intertek Intertek


Planner
.....
.....
.....
.....
.....
.....
.....
.....

Firex Srl reserves the right to make modifications to the products without prior notice. All information correct at time of printing - 2026.09.01/02

Firex Srl
Zona Industriale Gresal 28 - 32036 - Sedico (BL) - Italy
Phone +39 0437 852700
Fax +39 0437 852858
www.firex.com
firex@firex.com

Share the taste

Data sheet
UBAVR48DX

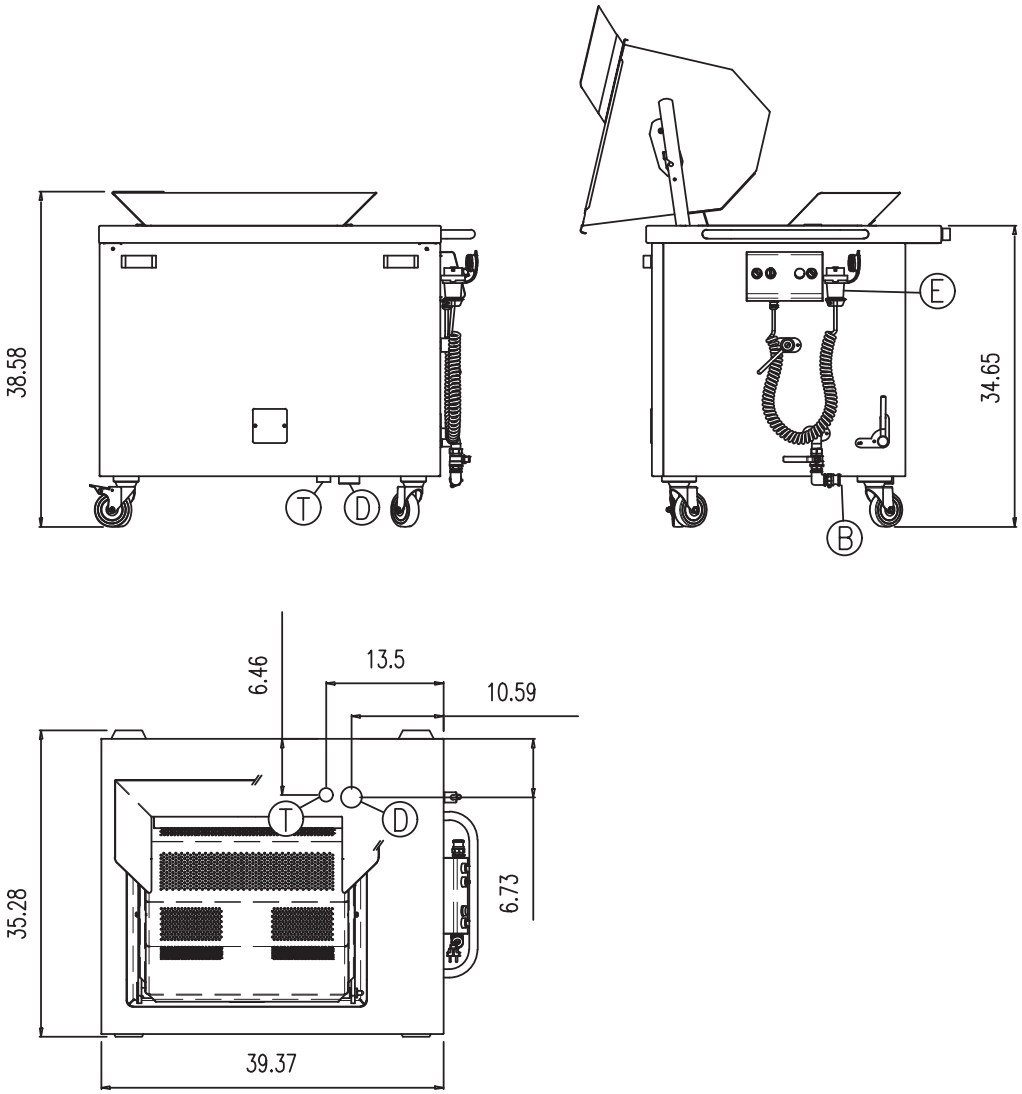

Dimensions weights and capacities

Width	39 3/8 inch	Vessel width	27 9/16 inch	Overall capacity	48 gal
Depth	35 1/4 inch	Vessel depth	25 1/4 inch	Number of baskets	1
Height	38 9/16 inch	Vessel height	16 1/2 inch	Weight	386 lb

Water connection

H2O drain (S)	2 inch	Cold water inlet (B)	3/4 inch	Overflow (T)	1 9/16 inch
Water pressure	25÷50 PSI				

Electrical connection

STD Voltage (E) *	1 PHASE 230V ~ 60Hz	Electric power	1.45 kW	Current	--- A

* connected to UCPM..48L, not to main supply

Firex Srl reserves the right to make modifications to the products without prior notice. All information correct at time of printing - 2026.09.01/02

Firex Srl
Zona Industriale Gresal 28 - 32036 - Sedico (BL) - Italy
Phone +39 0437 852700
Fax +39 0437 852858
www.firex.com
firex@firex.com

MIDDLEBY