


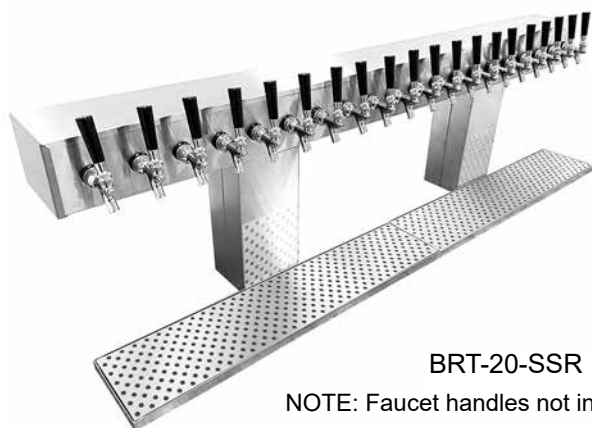

BRT-20-SSR

NOTE: Faucet handles not included.

Specifications

Drains

- Drain pan models - 1/2" tailpiece

Materials

- 20 gauge stainless steel parts include: head, column, drain pan, and perforated inserts
- 16 gauge galvanized steel parts include: interior foamed box
- 11 gauge stainless steel parts include: inner column base and top plate and tower head mounting plate

Shank Sizes

- 1/4" I.D. with 3/16" fittings

Rinser Faucet (optional)

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

Optional Rinser Faucet

Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Bridge Towers

BRT- -

Size: Specify the number of faucets from 14, 16, 18, 20, 24, 30

Finish:
SS = Grainline
MF = Mirror
PB=Brass

Standard Features

- All stainless steel construction
- Surface mount, stainless steel drain pan with removable, perforated insert
- 1/4" shanks with 3/16" restriction lines
- Eco friendly foamed-in-place insulated column for extra rigidity. Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion

Configurable Options

- 14, 16, 18, 20, 24, or 30 faucets
- Available in grainline finish, mirror finish, or brass finish* (*Note: Brass finish towers provided with mirror finish drain pan and brass finish perforated insert)
- Direct-draw air-cooled option available for 14, 16, and 18 faucet sizes* (*Note: Product is not intended for remote air-cooled installations)
- Available with insulated cold plate assembly for recirculating system
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

03012383
Rinser Faucet Assembly



Intertek

4004503
Conforms to NSF/ANSI STD 372



Optional Rinser Faucet Extension

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:


Bridge Towers

Drawings


DOUBLE COLUMN BRIDGE TOWER

FAUCETS	14	16	18	20
"A" WIDTH	44"	50"	56"	62"
"B" WIDTH	21"	24"	27"	30"
"C" WIDTH	Each rinser faucet adds 5" to drain pan width			

DOUBLE COLUMN BRT PLAN VIEW

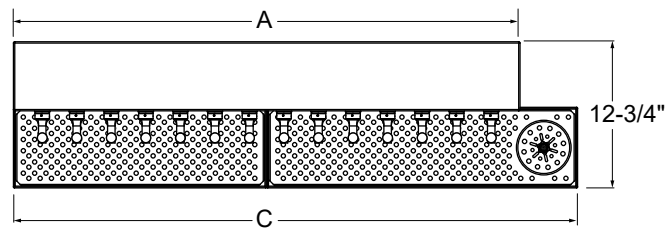


BRT FRONT ELEVATION

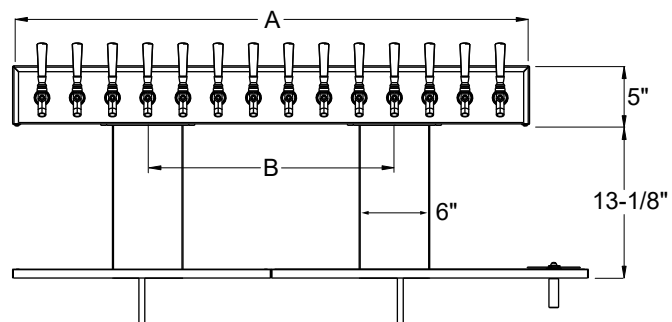


SHOWN WITH OPTIONAL RINSER FAUCET


BRT SIDE VIEW

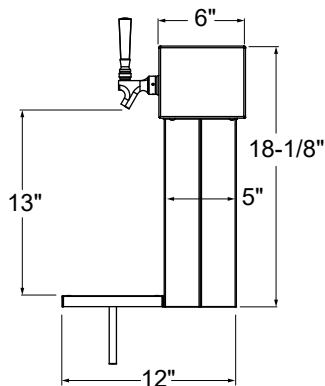

TRIPLE COLUMN BRT PLAN VIEW

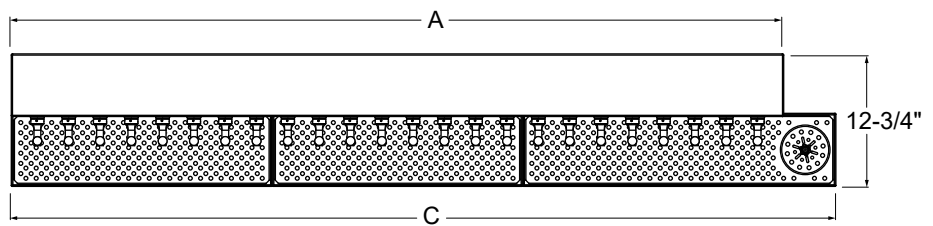

BRT FRONT ELEVATION

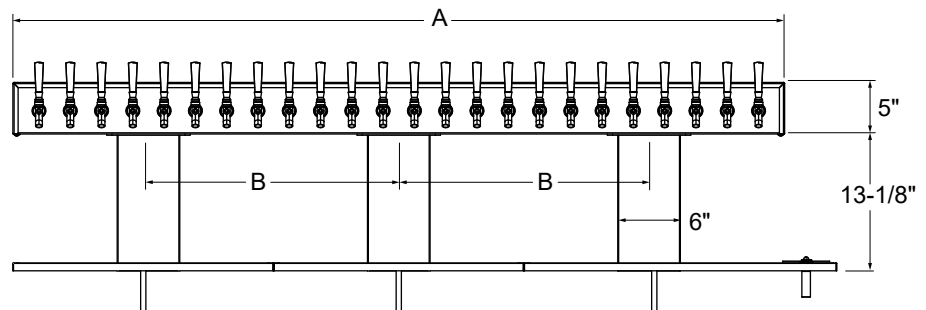

SHOWN WITH OPTIONAL RINSER FAUCET

TRIPLE COLUMN BRIDGE TOWER

FAUCETS	24	30
"A" WIDTH	74"	92"
"B" WIDTH	24"	30"
"C" WIDTH	Each rinser faucet adds 5" to drain pan width	