

UW6070DPS

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Basket dimensions	600x700 mm
Panel	Utensil Dishwasher
Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	850 mm
Default power supply	400 V 3N~ / 18 kW /50 Hz
Height with door open	2430 mm
Depth with door open	1255 mm
Dimensions	800x865x2095 mm
EAN code	8017709281762



Target

Potential users	Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools; QSR
-----------------	--

Aesthetics

Series	Utensil dishwasher	Led colour	Red
Control Panel	Electronic		

Functions



Functions	Euronorm trays washing; GN 1/1 trays washing; Door clearance 850mm
-----------	--

Programmes

Utensil washer programs	1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
Maximum baskets/hour	30

Interface

Display	4 digit	On/off indicator	Yes
Number of buttons	3		

Construction

Tank	With printed base	Rack guides	Welded
Tank material	Stainless steel AISI 304	Wash tank capacity	70 l
Back panel	Galvanized	Boiler capacity	17 l
Door	Double skinned	Protection class	IPX4
Counter balanced door	Yes	Adjustable feet	Yes
Upper washing system	A 3-arms washing and one split rinse spray arms, stainless steel	Net weight (kg)	244,000 kg
Lower washing system	A 4-arms washing and one split rinse spray arms, stainless steel; One single sideways washing and rinse spray arms, stainless steel	Drain max. height	950 mm
Tank filter	Stainless steel		

Technical Features

Tank heating element	4500 W	Water consumption per cycle	6 l
Boiler heating element	9000 W	Warm water connection	8°C
Default connection	12700 W	Inlet water maximum temperature	60°C
UW washing pump	1x2200W and 1x1500W	Max water hardness	12°f - 7°dH

Electrical Connection

Electrical connection options	230 V 3~ / 18 kW / 50 Hz
--------------------------------------	--------------------------


Equipment

Drain pump	Yes	Partial water exchange in the wash tank via built-in drain pump	Yes
Peristaltic detergent pump	Yes, manual	600x400 mm tray/box washing option	Yes
Peristaltic rinse aid pump	Yes, manual	Trays washing option	GN1/1 530X32 5mm
Boiler thermostop	Yes	Water supply pipe diameter	16 mm
Soft Start	Yes		
Detergent flow rate	1.5 l/h		
Rinse aid flow rate	0.4 l/h		

Break tank	Yes	Drain supply pipe diameter	21.5 mm
		Detergent (red) hose length	Yes, manual
		Rinse aid (blue) hose length	Yes, manual

Accessories Included

Cutlery basket	1 x WH00S02	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		

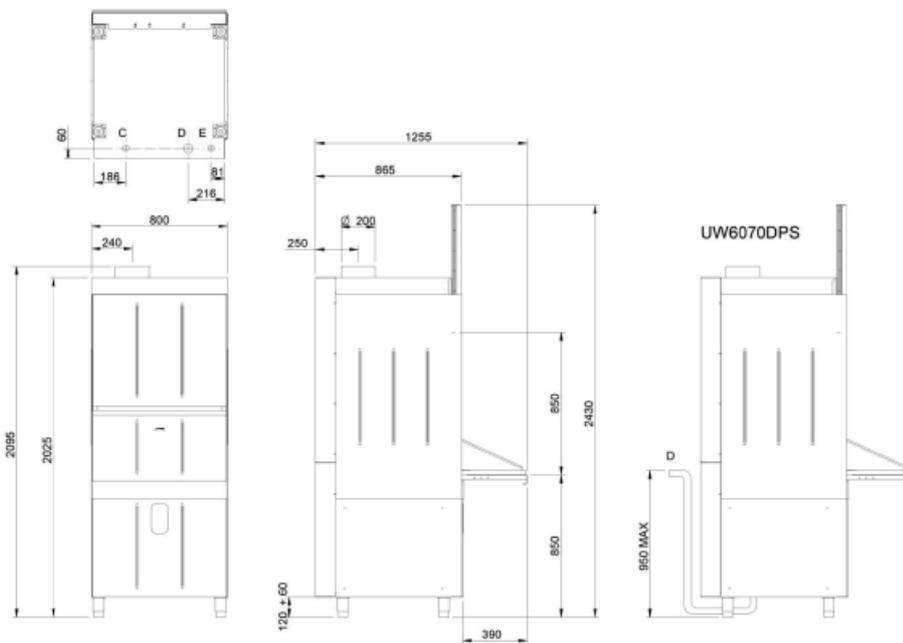

D = SCARICO 1/2", VIDANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÜE 1/2", СИДБ 1/2"

C = CARICAMENTO ACQUA 3/4" GAS; CHARGEMENT EAU 3/4" GAZ; WATER INLET 3/4" GAS; ZUFLOSS 3/4" GAS; CARGA AGUA 3/4" GAS; НАБОР ВОДЫ 3/4" GAS

E = ALLACCIAMENTO ELETTRICO; BRANCHEMENT ELECTRIQUE; ELECTRIC CONNECTION; ELEKTRISCHER ANSCHLUSS; CONEXION ELECTRICA; ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Not included accessories

WH00B02

Block for utensilwasher saccapoche




WB6070G01

Utensilwasher wire basket with flat bottom 700x600



WH00S02

Basket for utensilwasher tools



Symbols glossary



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



MAX.USABLE HEIGHT 850mm