

Product Name	Silenzio™ 650 Watt Drop-In Induction Buffet	Quantity		Item #	
--------------	---	----------	--	--------	--



Note: Induction buffet units require the use of induction compatible (i.e. magnetic) servingware.



### Standard Features

- Drop-in counter-top design, aluminum housing, heavy duty energy efficient electronics, high-impact commercial grade tempered glass
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Buffet unit shuts off and displays error codes enabling user to diagnose and correct minor problems
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to servingware, keeps food in the “safe zone”
- Four standard temperature settings
- Eleven additional temperature settings can be accessed via simple keypad function
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included. Replacement cables up to 25 ft (7.6m) long may be used but MUST BE SHIELDED.
- Easy to clean tempered glass top
- Works with standard induction compatible servingware
- Lock feature prevents unwanted setting changes
- Red LED display for precise user control and feedback
- Available in 100-120VAC or 200-240VAC
- Can use three 100-120VAC units on a 15 amp circuit or four on a 20 amp circuit

- Can use five 200-240VAC units on a 15 amp circuit
- Integral automatic timer commences when pan is placed on surface. Hold time is user selectable. Display flashes when hold time has expired. Timer can be turned on or off.
- Three year limited warranty in US/Canada only. See warranty statement for full details.
- Made in the USA\*

### Specifications

Shall be a CookTek drop-in Induction Buffet unit, model \_\_\_\_\_ with a total kW rating of 0.65 kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and a high-impact tempered glass top.

Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan maximizer feature to ensure maximum heating of any induction compatible pan.




Unit shall operate on \_\_\_\_\_ power with integral \_\_\_\_\_ cord and plug (supplied).

\*of USA and imported parts

SILENZIO™ 650W DROP-IN INDUCTION BUFFET

B651-D, B652-D

**COOKTEK**

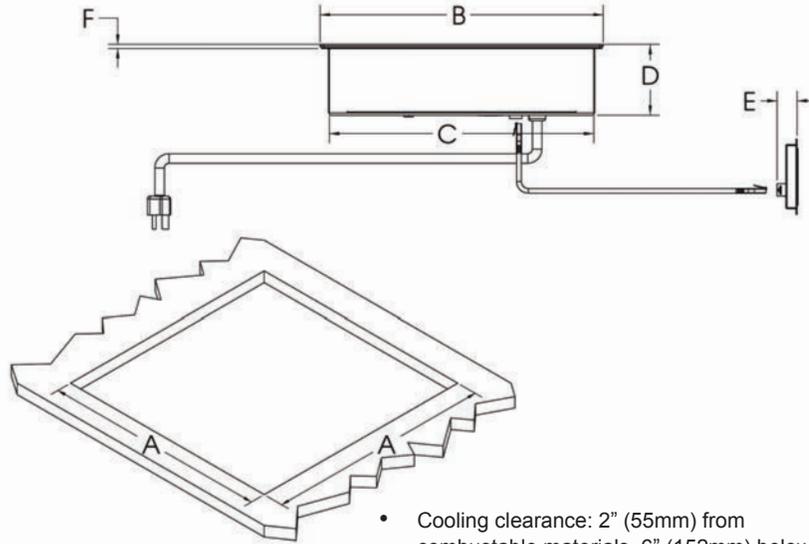

	Dimensions	
	inches	mm
A	14.30	363
B	15.00	381
C	14.10	358
D	3.75	95
E	1.02	26
F	0.22	5
G	2.90	74
H	2.25	57
J	3.81	97
K	3.26	83
L	2.46	62
M	1.91	49

- Cooling clearance: 2" (55mm) from combustible materials, 6" (152mm) below
- The maximum (do not exceed) ambient temperature is 50°C/122°F.



**Specifications**

Model Number	B651-D	B652-D
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1Ph
Power Consumption	650W (max)	650W (max)
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	5A (max)	2.7A (max)
Power Range	100-650W	100-650W
Preset Temperatures	150, 160, 175, 190°F / 65, 70, 80, 90°C	150, 160, 175, 190°F / 65, 70, 80, 90°C
Additional Temperature Settings	80, 165, 170, 180, 185, 200, 210, 220, 230, 240, 250°F / 30, 40, 50, 60, 75, 85, 95, 100, 105, 110, 120°C	80, 165, 170, 180, 185, 200, 210, 220, 230, 240, 250°F / 30, 40, 50, 60, 75, 85, 95, 100, 105, 110, 120°C
Dimensions (in)	15" x 15" x 3.75"	15" x 15" x 3.75"
Dimensions (mm)	381 x 381 x 95	381 x 381 x 95
Cutout Dimensions (in)	14.3" x 14.3"	14.3" x 14.3"
Cutout Dimensions (mm)	363 x 363	363 x 363
Weight	13 lbs / 5.9 kg	13 lbs / 5.9 kg
Packaged Weight	17 lbs / 7.7 kg	17 lbs / 7.7 kg
Packaged Dimensions (in)	20" x 20" x 10"	20" x 20" x 10"
Packaged Dimensions (mm)	508 x 508 x 254	508 x 508 x 254
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20Pin US/Canada - country specific elsewhere
Remote Control Box Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Warranty	36 months limited parts and labor in US/Canada only - see statement for details	

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

**CookTek Induction Systems, LLC**  
156 N. Jefferson St. Ste 300  
Chicago, IL 60661-1436, USA  
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220  
Toll Free: 1.888.COOKTEK (266.5835)  
Toll Free Fax: 1.888.COOKFAX (266.5329)