

Synergy Refrigerated Well

Product Group: **Synergy Drop-ins Refrigerated**
 Range:
 Sub Range:
 Product Name: **Blown Air Well**
 Part Number: **DRWL**
 Victor Computer Code: **DRWLY**
 Price List Page: **Synergy 3**



Electrical Connection
 220V/240V, 1 phase, 50 Hz.

Refrigerant
 R404a CFC free refrigerant

Cable
 Units fitted with 2 metres of cable and 13 amp plug.

Construction
 Top: Stainless Steel, Exterior: Stainless Steel, Interior: Stainless Steel

Designed for self or assisted service.


- Gantry Features**
- Constructed from 50mm diameter, bright polished stainless steel tube.
 - Fluorescent illumination to stainless steel light box.
 - Toughened glass screen and over shelf.
 - Digital temperature control and readout.

- Well Features**
- 304 Stainless steel well - 170mm deep
 - Load line indicator at 100mm to assist in the safe presentation of food
 - Accepts GNI/1 gastronorm containers up to 100mm deep.
 - Completely removable well giving easy access for cleaning and maintenance.

- Options**
- Front facing controls
 - 2, 3 and 4 pan size units can be fitted with a full height curved glass screen & side cheeks.

Operating conditions

Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
 Performance level M1 (-1°C to +5°C) in Climate class 3 (25°C, 60%RH, 0.2m/s) and
 Performance level M2 (-1°C to +7°C) in Climate class 4 (30°C, 55%RH, 0.2m/s)

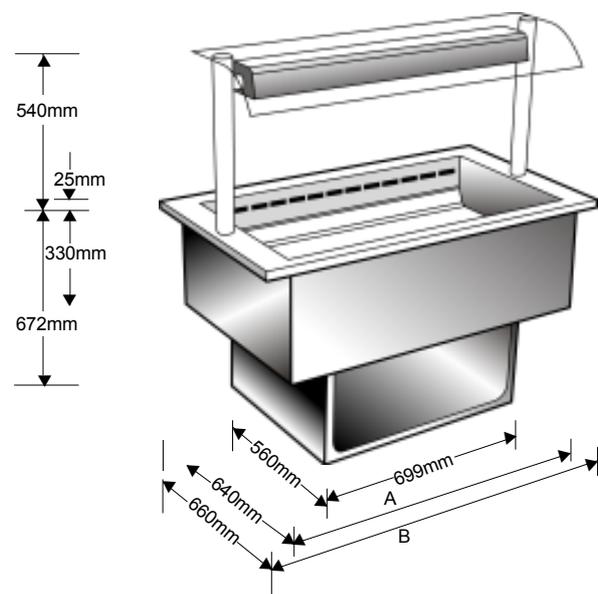

Product	GNI/1 Capacity	Part Number	cut out size (mm)	top size(mm) length x width x height		power (W)	Approx. weight (kg)
				A	B		
Blown Air Well	2	DRWL 2	725 x 646	708	850 x 660 x 540	1600	75
	3	DRWL 3	1045 x 646	1036	1177 x 660 x 540	1600	100
	4	DRWL 4	1370 x 646	1363	1504 x 660 x 540	2100	125
	5	DRWL 5	1700 x 646	1690	1831 x 660 x 540	2400	150