



HOSHIZAKI

Premier M BW80 DR U Refrigerator

PRODUCT SERIES: PREMIER
ITEM NUMBER: 182800030
COUNTRY OF ORIGIN: TURKEY



Hoshizaki Premier M BW80 DR U is a 2/1 GN wide fresh meat refrigerator with a net usable volume of 457 ltr. ranking A in energy efficiency class. It has a cabinet height of 1970 mm and depth of 770 mm.

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable door gaskets
- Pan-shaped inside base with rounded corners to catch fluid
- Integrated castors
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters



2/1 GN

ACCESSORIES INCLUDED

4 grey shelves

OPTIONAL ACCESSORIES

- Grey shelf with back guard
- Grey bottom shelf with back guard
- Stainless shelf with back guard
- Stainless bottom shelf with back guard
- Set of 4 stainless shelves with back guard
- Set of 2 shelf supports U shape
- Master key

WARRANTY PERIOD

6 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R600a / Refrigerant (kg): 0.07 / CO2 equivalent (kg): 0.21

CERTIFICATIONS



| Energy consumption (kWh/Year) | Energy efficiency class | Energy efficiency class standard | Energy Efficiency Index EEI |
|-------------------------------|-------------------------|----------------------------------|-----------------------------|
| 333 | A | ISO 22041-2019 | 24.45 |



HOSHIZAKI

Premier M BW80 DR U





TECHNICAL SPECIFICATIONS

| Temperature Range | GN or Tray Size (mm) | Volume, Gross (ltr.) | Net Usable Volume (ltr.) | Power Supply | Connection Load (Watt) | Ref. capacity at -10°C (Watt) | Climate Class | Sound Level – dB(A) |
|-------------------|----------------------|----------------------|--------------------------|--------------|------------------------|-------------------------------|---------------------------------|---------------------|
| -5/+12°C | 2/1 GN wide | 610 | 457 | 230V, 50 Hz | 120 | 206 | S (max. ambient 40°C w/ 40% RH) | 46 |

SHIPPING SPECIFICATIONS

| Dimensions W x D x H (mm) | Net Weight (kg) | Dimensions, Packed, W x D x H (mm) | Weight, Packed (kg) | Volume Packed (m3) |
|---------------------------|-----------------|------------------------------------|---------------------|--------------------|
| 830 x 770 x 1970 | 135 | 870 x 795 x 2150 | 145 | 1.48 |

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

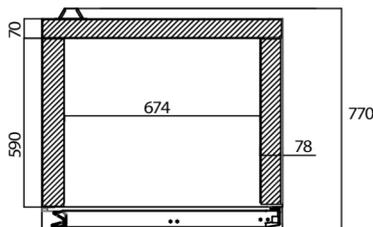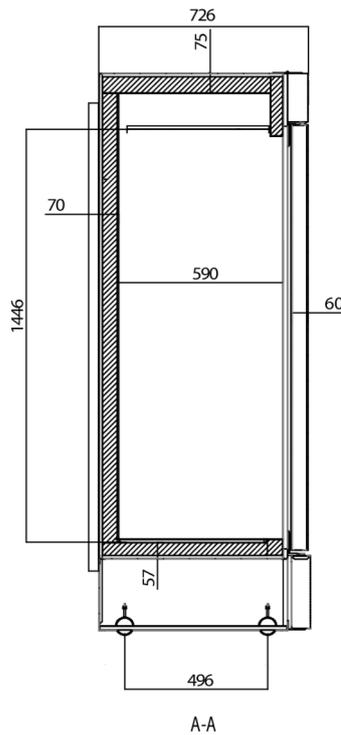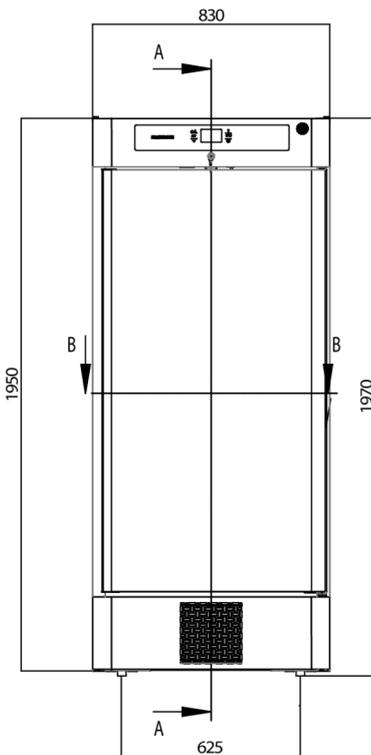

Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.be
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk