

TUC-24F-HC

 Undercounter Foodservice Freezer, 1 Solid Swing Door



| Dimensions | |
|------------------------------------|--|
| External Width (mm) | 610 |
| External Depth (mm) | 627 |
| External Height (mm) | 802 |
| Exclusions | Depth does not include 26 mm for rear bumpers. |
| Net Volume (Litres) | 94 |
| Gross Volume (Litres) | 158 |
| Supplied Shelves | 2 |
| Shelf Size (L x D mm) | One 508 x 352 + One 508 x 273 |
| Internal Net Height (mm) | 600 |
| Unpackaged Weight (kg) | 64 |
| Packaged Weight (kg) | 75 |
| Packaged Dimensions (W x D x H mm) | 788 x 762 x 1042 |
| Supplied with | Built-in recessed castors (7mm clearance) |

| Build | |
|-----------------------|--|
| Door Description | 1 Solid Swing Door |
| Door Opening | Right (standard) or Left Field Reversible |
| Exterior Construction | Stainless steel front & countertop, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base |
| Air Intake Position | Front |
| Ventilation Position | Front |
| Clearance Required | Zero back and sides |
| Cord Length (Meters) | 2.13 |
| Standard w/ Locks | Standard |

| Technical | |
|--------------------------------|--|
| Temperature Range | -23°C |
| Refrigerant | R290 |
| Voltage/Frequency/Phase | 220-240V/50-60Hz/1 |
| Amps | 1.6 |
| Watts | 368 |
| Climate Class | 5 |
| Operating Statement | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard | EN 16825 |
| EEC | C |
| Energy Efficiency Index | 44.4 |
| Defrost Type | Auto |
| Energy Consumption (kWh/24h) | 3.56 |
| Energy Consumption (kWh/Annum) | 1300 |



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-24F-HC

Undercounter Foodservice Freezer, 1 Solid Swing Door

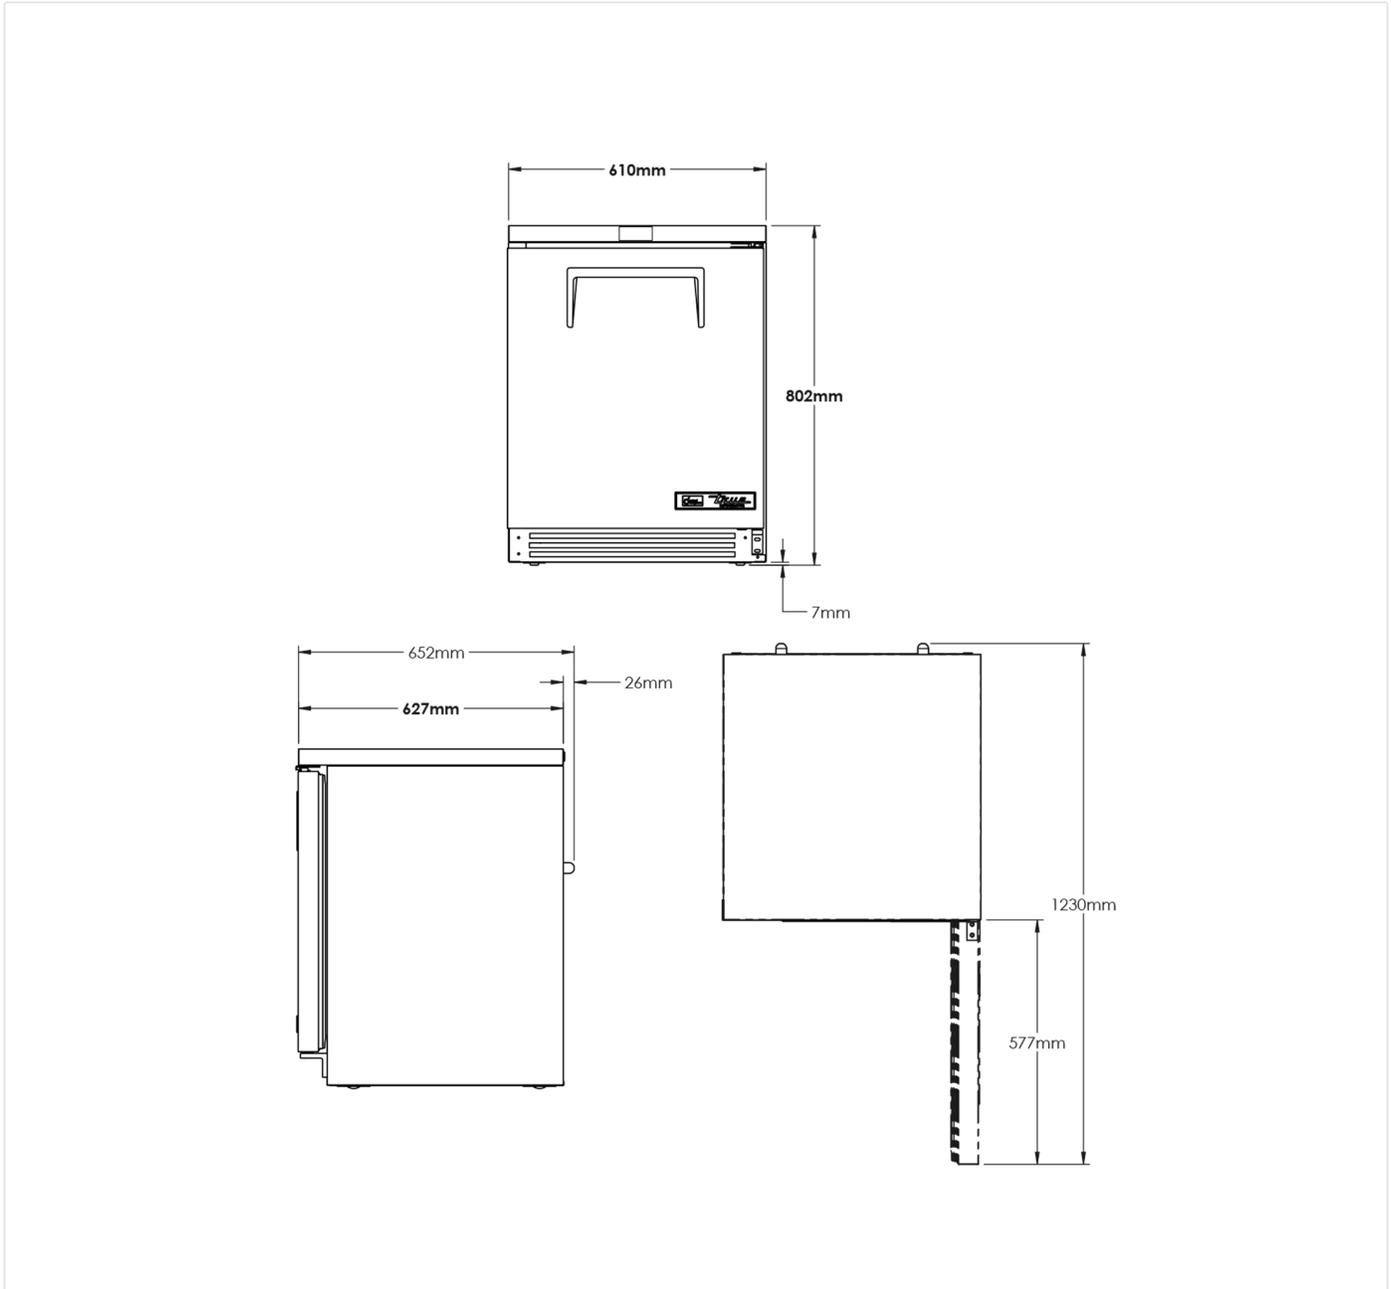

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

