VICTORY

PROJECT:		
TEM #		OTY:
MODEL #		
AIA #	SIS #	

UNDERCOUNTER FREEZER VUF48HC



EXCLUSIVE WARRANTY

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- Stainless Steel 20 Gauge Doors
- One Piece, Snap-In Magnetic Door Gaskets
- 6" Casters Two With Brakes
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Stay-Open Door Feature For Easy Product Loading
- · Heavy-Duty, Spring Loaded Cartridge Hinges
- Low Profile Horizontal Door Handles
- Epoxy Coated Shelves (2 per section)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature -10°F



OPTIONS & ACCESSORIES

- Stainless Steel Interior
- Stainless Steel Back
- Door Locks
- Door Swing Orientation (at time of order)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Cutting Board

- Additional Shelves
 - Shelf Clips (set of 4)
 - Casters: 3", Roller Kit, Low Profile
 - 6" Legs Or 6" Seismic Legs
 - Correctional Package


Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

APPROVAL: __

VICTORY UNDERCOUNTER FREEZER VUF48HC



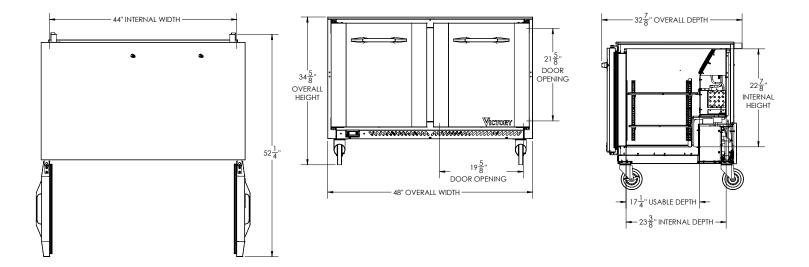

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

3" Bottom & 2" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	11.04	Cabinet Voltage	115/60/1	Height	48″
Width, Overall (in.)	48″	Total Amperes	5.0	Width	50″
Depth, Overall (with handle)	32 7/8″	NEMA Plug (8' cord)	5-15P	Depth	37″
Height Overall (6" casters)	34 5/8″	REFRIGERATION DATA		Crated Weight	312 lbs
Depth, Door Open 90°	52 1/4"	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Door Openings (in.)	19 5/8" x 21 5/8"	Refrigerant*	R-290		
No. Of Door/Shelves	2/4	Capacity (BTU/HR) (100°F/-20°F)	1865		
		Heat Rejection (BTU/HR)	2797.5		
		Charge (lbs/grams/ounces)	0.165 / 75 / 2.64		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com Rev. 7/19/24 Printed in U.S.A.

