
Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

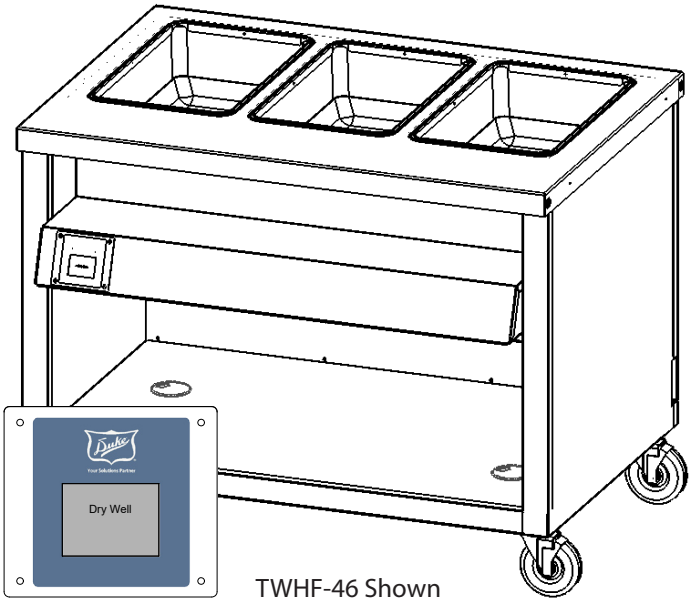

TWHF-46 Shown

Approval Stamp(s):

PRODUCT INFORMATION:
PROJECT: _____
ITEM: _____
QUANTITY: _____
MODEL:

Thurmaduke™ Serving Systems
Ganged Waterless Well

- ❑ **TWHF-32** 32" length unit, 2 top openings
- ❑ **TWHF-46** 46" length unit, 3 top openings
- ❑ **TWHF-60** 60" length unit, 4 top openings
- ❑ **TWHF-74** 74" length unit, 5 top openings
- ❑ **TWHF-88** 88" length unit, 6 top openings

TOP:

- ■ 16 gauge, 300 Series stainless steel
- ■ Die-stamped openings - 11-7/8" x 19-7/8"

Heat Compartments:

- ■ 6-1/2" deep stainless steel liner for dry operation only
- ■ 6' Cord and plug
- ■ Includes Silicone bottom pad
- ■ Fully Insulated
- ■ Rope element in each compartment

CONTROLS:

- ■ Standard intuitive, easy to use touch screen control - One control for all wells
- ■ Easily adjusted presets LOW/MED/HIGH
- ■ Built in WIFI and Bluetooth for future connectivity.

BODY:

- ❑ **Choice of powder coat paint colors**
- ❑ **Stainless steel body**
- ■ Operator's side open to bottom shelf
- ■ Customer side and ends fully enclosed
- ■ Bottom shelf paint grip or stainless steel to match body
- ■ Recessed stainless steel dish shelf

OPTIONS:

- ❒ 3 Phase Wiring
- ❒ 14 gauge tops
- ❒ Internal locking devices
- ❒ Foodshields
- ❒ Workshelves
- ❒ Trayslides
- ❒ 8' or 10' cord and plug
- ❒ Veneered plastic laminate panels on body
- ❒ Powder coat paint colors
- ❒ 6" adjustable legs in lieu of casters
- ❒ Kickplates s/s or p/g
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34".

Agency Listings:

c UL us CLASSIFIED UL EPH

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

THURMADUKE SERVING SYSTEMS - Ganged Waterless Well
Catalog No. Waterless Well
A.I.A. File No. 35-C-13


A.I.A. File No. 35-C-13


Catalog No. Waterless Well


THURMADUKE SERVING SYSTEMS - Ganged Waterless Well


Thurmaduke®

Ganged Waterless Well

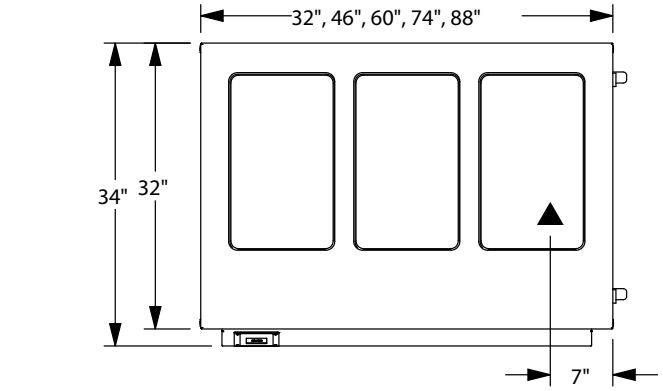

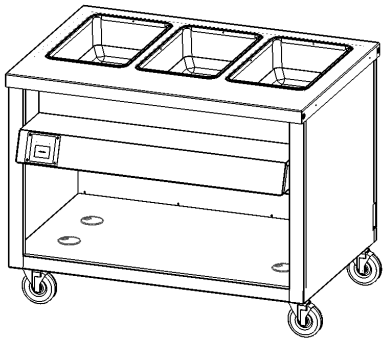

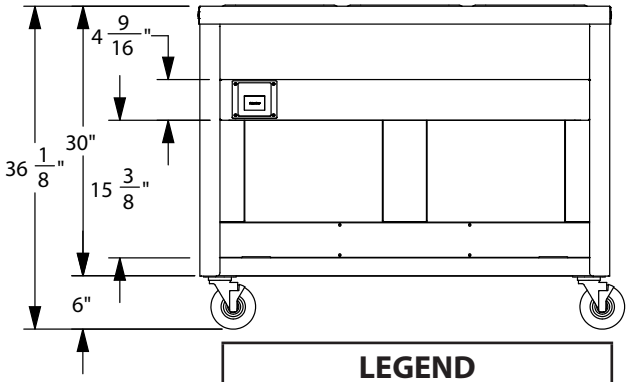

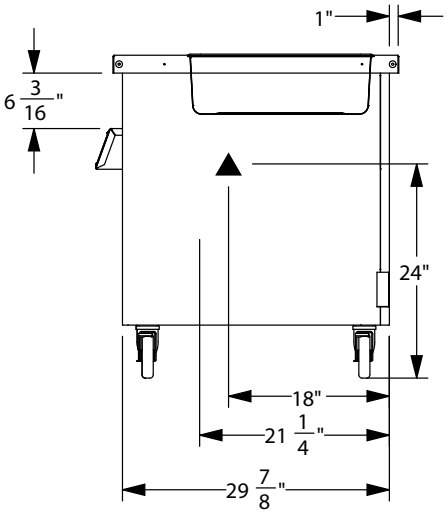

LEGEND

▲ - ELECTRICAL CONNECTION

DIMENSIONS:


Freight Class: 150

Model	Length		Width		Height		Cube ft. crated	Weight		Top Openings
	in	cm	in	cm	in	cm		lbs	kg	
TWHF-32	32	81.3	32	81.3	36	91.4	34.8	253	115.0	2
TWHF-46	46	116.8	32	81.3	36	91.4	47.7	327	148.6	3
TWHF-60	60	152.4	32	81.3	36	91.4	60.5	400	181.8	4
TWHF-74	74	188.0	32	81.3	36	91.4	73.3	482	219.1	5
TWHF-88	88	223.5	32	81.3	36	91.4	86.2	595	270.5	6


ELECTRICAL SPECIFICATIONS:

Model	120V 665W			208V 500W			240V 665W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
TWHF-32	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20
TWHF-46	2083	17.4	L5-30	1588	7.6	6-20	2083	8.	6-20
TWHF-60	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20
TWHF-74	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	L6-30
TWHF-88	N/A			3092	14.9	L6-30	4082	17.0	L6-30

Control Specifications

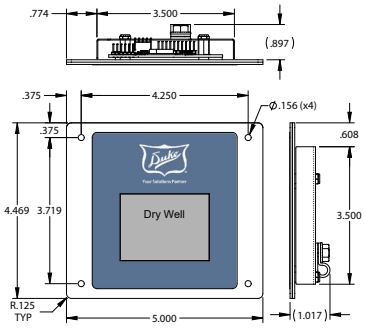

Control Cutout



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Your Solutions Partner

Printed in U.S.A.
© 2025, Duke Manufacturing Co.