



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
EERMU-2 R-290 UK 230V 50/60Hz 1N

19096662

04/05/2023

The photo may show the standard model and not the configured one

DENOMINATION:


Refrigerated wall displays ERMU SERIES (black plastic covered), height 800 mm with 2 door at 50Hz.

DESCRIPTION :

Refrigerated wall displays ERMU SERIES (black plastic covered): HEIGHT 800 mm

- Sanitary epoxy coated galvanised steel inside.
- Black plastic covered galvanised steel (black version).
- 40 kg/m³ injected polyurethane insulation.
- Copper piping and aluminium flaps evaporator.
- Hermetically sealed copper serpentine ventilated compressor.
- Double glazed doors with anti-mist protection (low E) with inner air chamber and handle.
- Digital display for electronic control of temperature.
- ON/OFF power switch.
- Top horizontal lightning.
- Working temperature: +2 °C, +8 °C (room temperature: 32 °C).
- UK plug

DIMENSIONS



X Width	925 mm	X Gross width	970 mm
Y Depth	565 mm	Y Gross depth	615 mm
Z Height	800 mm	Z Gross height	955 mm
Net Weight	80,0 kg	Gross Weight	83,0 kg
Net volume	0,418 m ³	Gross volume	0,570 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	1,62 A
Electric frequency	50/60Hz
Electric power	0,280 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290
----------	-------

COLD TECHNICAL SPECIFICATIONS

Annual elec. consumption	1281,15 kWh
Clasif. Energy efficiency	G
Climate class	4
Cooling gas load	59,000 g
Energy Efficiency Index	99,79 %
Power consumption 24h	3,51 kWh
Refrigeration power	0,369 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T - 4 A
--------------------------	---------------

OTHERS

Condensation system	Vent.
Number of doors	2







Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
EERMU-2 R-290 UK 230V 50/60Hz 1N

19096662

04/05/2023

The photo may show the standard model and not the configured one

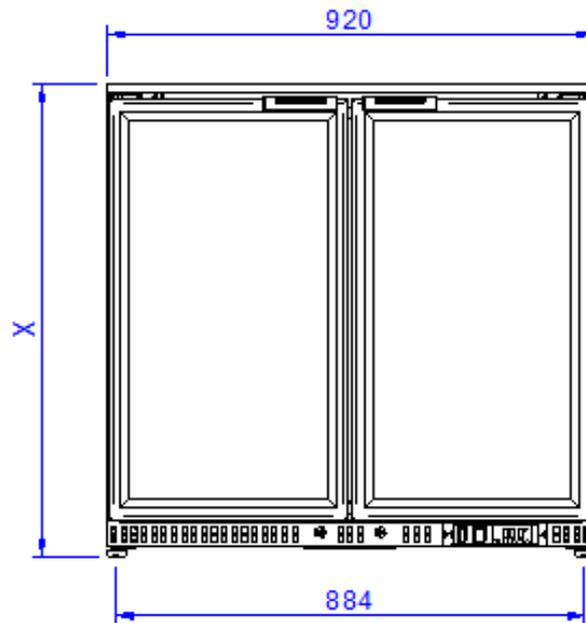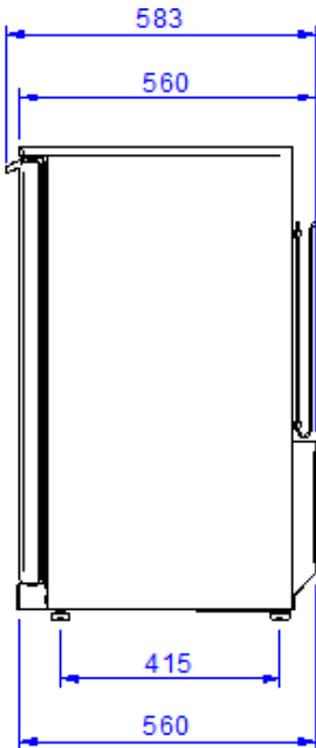

	EERM	EERMU
X	900	800

