
Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

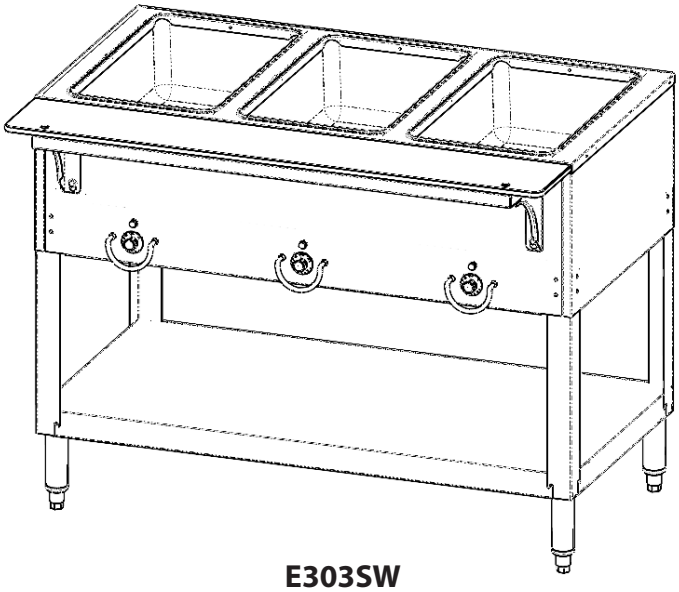

E303SW

Approval Stamp(s):

PRODUCT INFORMATION:
PROJECT: _____
ITEM: _____
QUANTITY: _____

MODEL:

Aerohot™ Foodservice
Hot Food Units - Electric - Sealed Wells

- ❑ E302SW/EP302SW 2 top openings
- ❑ E303SW/EP303SW 3 top openings
- ❑ E304SW/EP304SW 4 top openings
- ❑ E305SW/EP305SW 5 top openings

TOP:

- 20 gauge, stainless steel
- Die-stamped openings - 11-7/8" x 19-7/8"
- Poly carving board - 7"W x 1/2" thick with 18 gauge stainless steel support shelf and die-stamped brackets

HEAT COMPARTMENTS:

- Insulated on all four sides and bottom with fiberglass
- Stainless steel die-formed 6-1/2" deep sealed well
- Individual well drains
- Wet or dry use

BODY AND INTERIOR SHELF:

- 20 gauge, 430 Series stainless steel body
- 20 gauge, 430 Series stainless steel undershelf
- 430 Series stainless steel tubular legs with adjustable plastic feet

ELECTRICAL INFORMATION:

- ❑ 750 watt elements standard
- ❑ Wired to operate on 120, 208 or 240 Volt
- Single phase standard
- AC current
- Infinite switches standard
- Permanently wired, 6' long cord and plug provided

OPTIONS:

- ❑ 3-phase wiring
- ❑ Drop type brackets for cutting board
- ❑ 1200W elements
- ❑ Adapter plates
- ❑ Insets/Inset Covers
- ❑ Dish Shelf
- ❑ Trayslides & Workshelves
- ❑ Foodshields
- ❑ Manifolded drains with master valve

AGENCY LISTINGS:

c UL US LISTED

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change


WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

AEROHOT™ FOODSERVICE - HOT FOOD UNITS - ELECTRIC - SEALED WELLS

Catalog No. AFS-ELECSW

A.I.A. File No. 35-C-13


Aerohot®

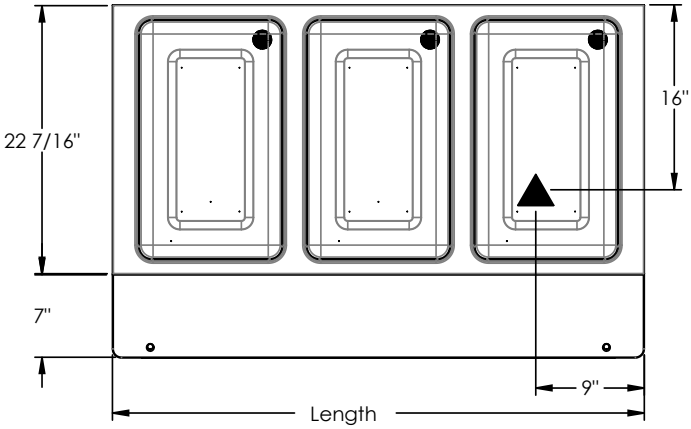


Top View

E303SW - Shown

LEGEND
▲ ELECTRICAL CONNECTION

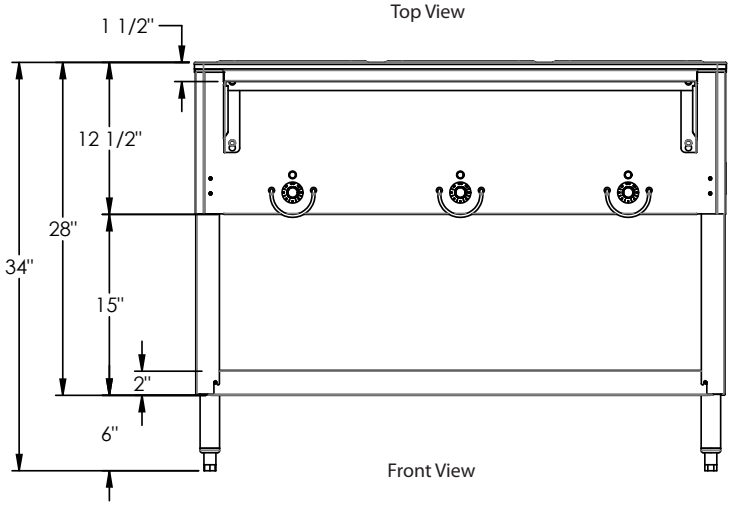

Front View

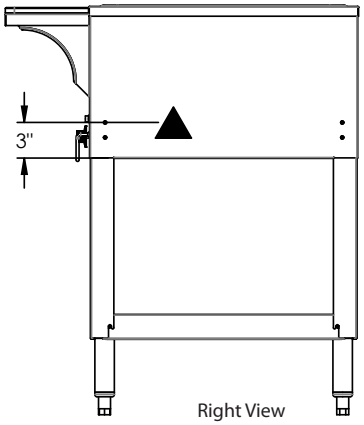

Right View

DIMENSIONS: (Consult factory for 3-phase electrical requirements and other options.) Freight Class: 85

Model	Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm			lbs	kg
E302SW/EP302SW	30-3/8	77.2	22-7/16	57.1	34.0	86.4	2	23.4	81/90	36.8/40.9
E303SW/EP303SW	44-3/8	112.8	22-7/16	57.1	34.0	86.4	3	32.5	107/114	48.6/51.8
E304SW/EP304SW	58-3/8	148.3	22-7/16	57.1	34.0	86.4	4	41.5	138/144	62.7/65.5
E305SW/EP305SW	72-3/8	183.9	22-7/16	57.1	34.0	86.4	5	50.5	165/172	75.0/78.2

ELECTRICAL SPECIFICATIONS: Cord and NEMA plug included

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E302SW/EP302SW	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
E303SW/EP303SW	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E304SW/EP304SW	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E305SW/EP305SW	3750	31.3	5-50	3750	18.0	L6-30	3750	15.6	L6-30

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
E302SW/EP302SW	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
E303SW/EP303SW	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20
E304SW/EP304SW	N/A			4800	23.1	L6-30	4800	20	L6-30
E305SW/EP305SW	N/A			6000	28.9	6-50	6000	25	6-50

CONTACT FACTORY: Electric values & plug configurations change for 3 phase or when adding electric options.

Duke
Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2025, Duke Manufacturing Co.