

Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



59-E3

OPTIONS:

- Stainless steel interior
- ☐ 4" or 6" stainless legs
- 8", 16", 27" stainless angular legs
- Casters
- ☐ Stainless steel open base with rack guides
- Extra Oven racks
- 8' or 11' cord and plug with receptacle
- ☐ High voltage (380/415/440/480)
- ☐ Pulse Fan option ("XX" controls only)
- ☐ Baking station stand on casters (**59-BS**)
- ☐ Proofer base (**PFB-1**)
- Extended warranty
- Optional shelf for leg stand
- ☐ Field stacking kit

DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102 800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com SS-1060 Half Size Oven 59-E3

	DDUCT INFORMATION: DJECT:
ITE	М:
	ANTITY: DEL:
Dul	ke Convection Ovens gle Section - Half Size - Electric
	59-E3 8.0 KW input per section
	NDARD FEATURES
	- stacks/stack positions per oven
	4" plastic legs/adjustable feet
OVI	EN SECTION
	Stainless steel front, sides and top
	1" insulation on bottom, sides and back 3" insulation on top
	· · · · · · · · · · · · · · · · · · ·
OVI	EN CONTROLS
	"V" - Basic snap action thermostat (200° -
	500°F), 60 minute electric dial timer with
	continuous sounding buzzer, 2-speed fan I "XX" - Solid state digital time and
	temperature controls, 12-hour countdown
	timer, Cook and Hold feature, 2-speed fan,

Approval Stamp(s):

Certifications




Pulse fan capability

Specification subject to change





DUKE CONVECTION OVENS


HALF SIZE—ELECTRIC—SINGLE SECTION

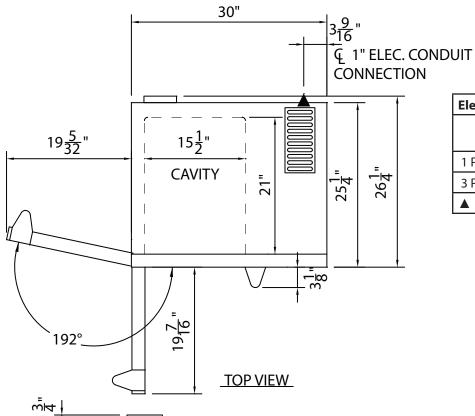

Electrical Specifications - Per Section								
	208V Amps	240V Amps	KW					
1 Phase	40.0	35.0	8.0					
3 Phase	24.0	21.0	8.0					
▲ Electronic connection point								







FRONT VIEW

RIGHT SIDE VIEW

DIMENSIONS:

	Depth		Width		Height		Cube	Weight	
Model	in.	cm	in.	cm	in.	cm	ft. crat- ed	lbs.	kg
59-E3	25 1/4	64.1	30	76.2	30	76.2	24.3	265	120.5



Duke Manufacturing Co.

2305 N. Broadway St. Louis, MO 63102 Phone: 314-231-1130 Toll Free: 1-800-735-3853 Fax: 314-231-5074

www.dukemfg.com

Freight Class: 85