


BTGAB6




PRODUCT FEATURES

- Single glazed
- Hinged rear door
- Solid front or sliding front doors
- Solid front that hinges at base
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated

Maximum shelf load weight 15kg spread evenly

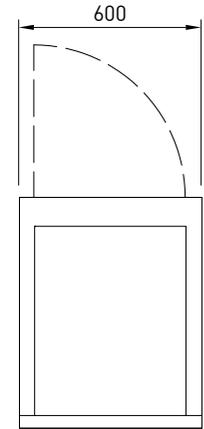

BTGAB6-SD

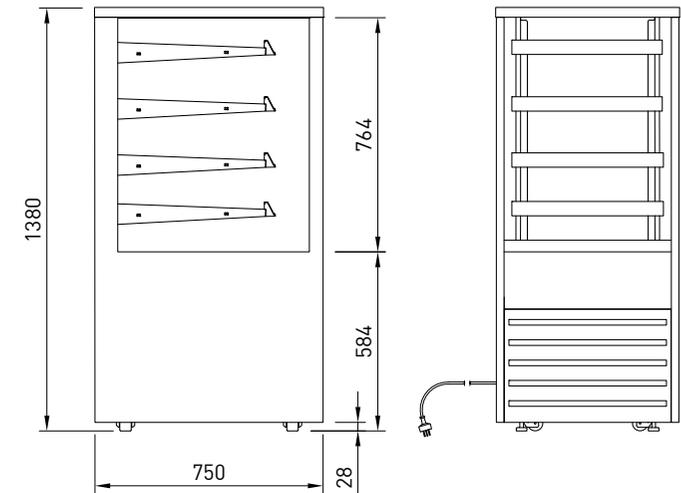

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									DEG C	W X D	W X D	100MM UNITS		KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP
BTGAB6 BTGAB6-SD	600	750	1380	112	4 + BASE	N/A	490 X 445	540 x 510	100	1.14	0.29	50 Hz	0.05	0.2	10 AMP	3 PIN PLUG	220-240V	700	830	1550	118