

INSTINCT

Induction hob (table-top), heating zone 372 x 349 mm

Models

- INSTINCT Hob 3 (UK market only) INSTINCT Hob 3.5 INSTINCT Hob 5



INSTINCT Hob 3/3.5/5

- Realtime Temperature Control System RTCSmp
- 12 power levels
- Warm-holding function from 25 to 100°C
- Timer function
- Specially energy efficient
- Convenient and reliable
- Short heating-up times
- Overheat protection


Properties

- Continuous temperature measurement at the bottom of the pan with RTCSmp technology (Realtime Temperature Control System multi-point)
- The reliable overheat protection prolongs the service life of both the induction appliance and the cookware
- Consistent power transfer over the entire cooking time for optimal cooking results
- Convenient cooking without heating up the cooking environment thanks to direct heat transfer from the hob to the pan by means of induction
- Easy to clean thanks to a removable, washable and reusable air filter
- Cool to touch cooking surface, means no "burn on" of food debris on the cooking surface
- Exceptionally robust and developed for continuous operation in the restaurant industry
- Conversion of the temperature display from degrees C to degrees F
- Reduction of the maximum power from 100% to 25%
- Mains voltage detection and automatic loading of the optimal parameters. Single-phase version (up to 3.5kW) at 208V – 240V: identical worldwide
- Warranty: 2 years on all parts

Included Features

- RTCSmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter



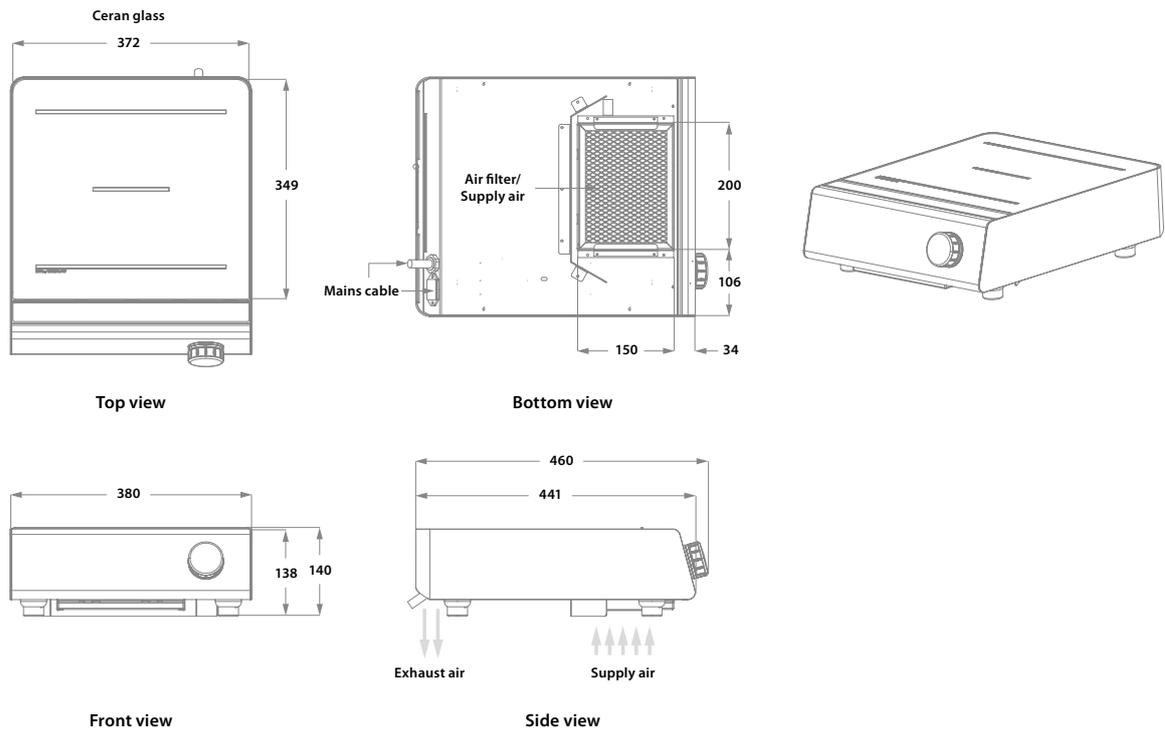

All dimensions in mm

Number of heating zones	1
Ceran glass surface B x D	372 x 349 mm
Inductor diameter	ø 220 mm
Power levels	12
Warm-holding function	25 to 100°C
Housing	Stainless steel

Model	INSTINCT Hob 3 (UK market only)	INSTINCT Hob 3.5	INSTINCT Hob 5
Power, watts	1 x 3000	1 x 3500	1 x 5000
Electrical supply V/Hz	208-240/50-60/1	208-240/50-60/1	380-440/50-60/3 208/50-60/3
Dimensions B x D x H mm	380 x 460 x 140 mm	380 x 460 x 140 mm	380 x 460 x 140 mm
Weight, kg	12	12	14