



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## UNDERCOUNTER FREEZERS

### Model: UCF67AHC

TWO DOORS



## 7 YEAR WARRANTY Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- Stainless steel front, sides, top, door and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heater
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Four (4) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)



### OPTIONS & ACCESSORIES


- Stainless steel back
- Stainless steel interior
- Right or left hinged door
- Additional shelves
- Shelf clips
- Glass door option
- Lock
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option\* (see note on back on page)

### REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezers capable of maintaining product temperature of -10°F




PLAN VIEW

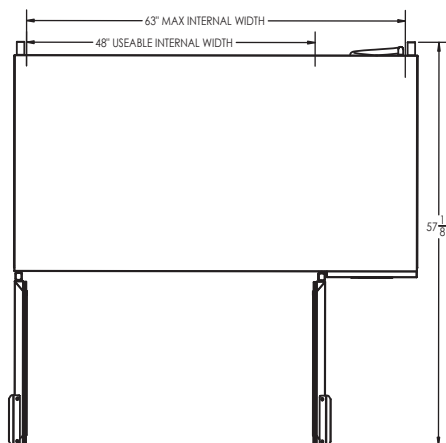

ELEVATION VIEW

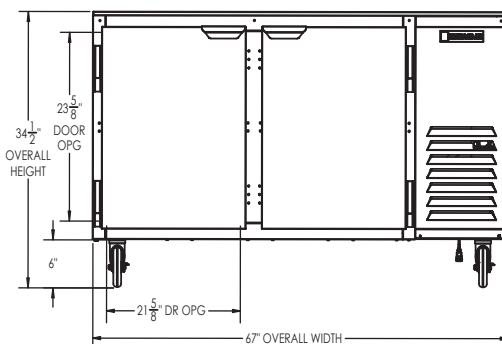

SIDE VIEW

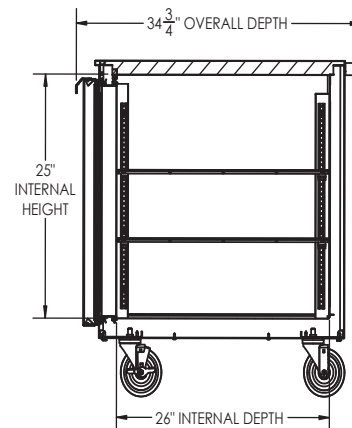

### EXTERNAL DIMENSIONAL DATA

|                           |                   |
|---------------------------|-------------------|
| Width Overall (in)        | 67"               |
| Depth Overall (in)        | 34 3/4"           |
| Height Overall (in)       | 34 1/2"           |
| Number of Doors           | 2                 |
| Depth with Door Open 90 ° | 57 1/8"           |
| Door Openings (in)        | 21 5/8" x 23 5/8" |

### INTERNAL DIMENSIONAL DATA

|                              |       |
|------------------------------|-------|
| NET Capacity (cubic ft.)     | 20.08 |
| Internal Width Overall (in)  | 63"   |
| Internal Depth Overall (in)  | 26"   |
| Internal Height Overall (in) | 25"   |
| Number of Shelves            | 4     |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 3" Bottom & 2" Rear

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 6.4      |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                    |
|---------------------------|--------------------|
| Horsepower                | 3/4                |
| Capacity (BTU/Hr)         | 2312               |
| Heat Rejection (BTU/Hr)   | 3468               |
| Charge (lbs/grams/ounces) | 0.1653 / 75 / 2.65 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 366 lbs. |
| Height - Crated (in)  | 39"      |
| Width - Crated (in)   | 70"      |
| Depth - Crated (in)   | 35"      |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.