\_\_\_ DATE: \_\_\_\_

# \_\_\_ QTY: \_

- Stay-Open Door Feature For Easy Product Loading
- Required Clearance Is 12" Top, 3" Rear And 0" Sides
- 6" Casters
- 8' Cord And Plug

Aluminum Interior

#### **FEATURES**

- High Performance Refrigeration System With An Electronic Control
- Expansion Valve Technology
- Energy Efficient LED Lighting

PROJECT: \_

MODEL # AIA #

CABINET CONSTRUCTION

 Snap-In, Magnetic Door Gasket(s) • Heavy Duty Cam Lift Hinges

Stainless Steel Front, Gray Coated Sides

ITEM # \_

• 9 Heavy Duty Epoxy Coated Shelves

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Freezer Capable Of Maintaining Product Temperature Down To -10°F

- - · Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
  - Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see not on back page)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

### **OPTIONS & ACCESSORIES**

- Stainless Steel Back
- · Stainless Steel Interior
- · Stainless Steel Exterior
- Tray Slides
- 6" Legs Or 3" Casters (no charge at time of order)
- Stainless Steel Breaker



VEFSA-3D-GD-HC

**EXCLUSIVE WARRANTY** 





7 Year Parts, Labor and Compressor

Exclusive 2 Year Warranty On Magnetic Door Gaskets

Lifetime Warranty On Handles & Hinges (parts only)

VICTORY ELITE<sup>™</sup> TOP MOUNT FREEZER



SIS #



Please Verify Qualifying Units By Visiting:






## VICTORY VICTORY ELITE<sup>TM</sup> TOP MOUNT FREEZER

**VEFSA-3D-GD-HC** 



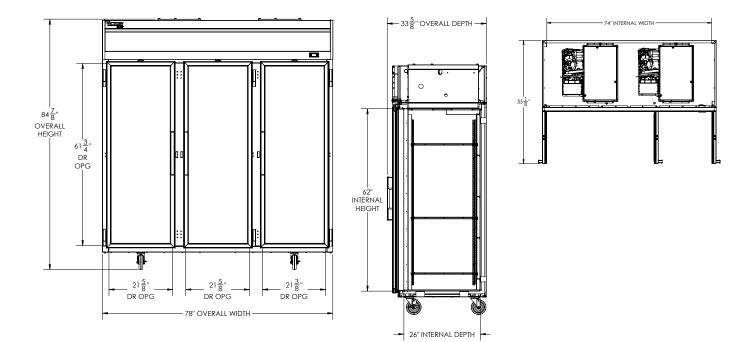

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	69.1	Cabinet Voltage	115/60/1	Height	88″
Width, Overall (in.)	78″	Total Amperes	13.2	Width	80″
Depth, Overall (with handles)	33 5/8″	NEMA Plug* (8' cord)	5-20P	Depth	45″
Height Overall (6" casters)	84 7/8″	REFRIGERATION DATA		Crated Weight	772 lbs
Depth, Door Open 90°	55 1/8"	Condensing Unit Size, HP*	(2) 3/4	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified	
Door Openings (in.)	21 5/8" x 61 3/4" 21 3/8" x 61 3/4"	Refrigerant*	R290		
No. Of Doors/Shelves	3/9	Capacity (BTU/HR) (100°F/-20°F)	3854		
		Heat Rejection (BTU/HR)	5781	at time of order.	
		Charge (Ibs/grams/ounces)	(2) 0.2535 / 115 / 4.06		

#### 12" Top clearance is required

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

