

100 LITRE INDIRECT ELECTRIC POT WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev.:
Zone:
Location:



CODICE
CR1356039

MODELLO
D94/10PEI10S

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.
External coatings and feet in stainless steel with Scotch Brite finish.
Working table height adjustable from 840 to 900 mm.
Range modularity: 200-400-600-800-1200
Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 304 stainless steel tanks with AISI 316 bottom.
Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.
Frontal drain by means of 2" chrome-plated brass faucet.
Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).
Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.
Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Possibility of hot or cold water loading

Stainless steel tank with aisi 316 bottom

Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

100 LITRE INDIRECT ELECTRIC POT WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev.:
Zone:
Location:



CODICE
CR1356039

MODELLO
D94/10PEI10S

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356039
DEFINITION	D94/10 PEI10 S PEN.ELE IND.M80 W/VAL100L
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	145,000 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	1070,000 mm
PACKAGE WIDTH	840,000 mm
PACKAGING HEIGHT	1250,000 mm
PACKAGE VOLUME	1,115 m3
GROSS PACKING WEIGHT	159,800 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	21,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 PEI10

100 LITRE INDIRECT ELECTRIC POT WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev.:
Zone:
Location:




CODICE
CR1356039

MODELLO
D94/10PEI10S

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

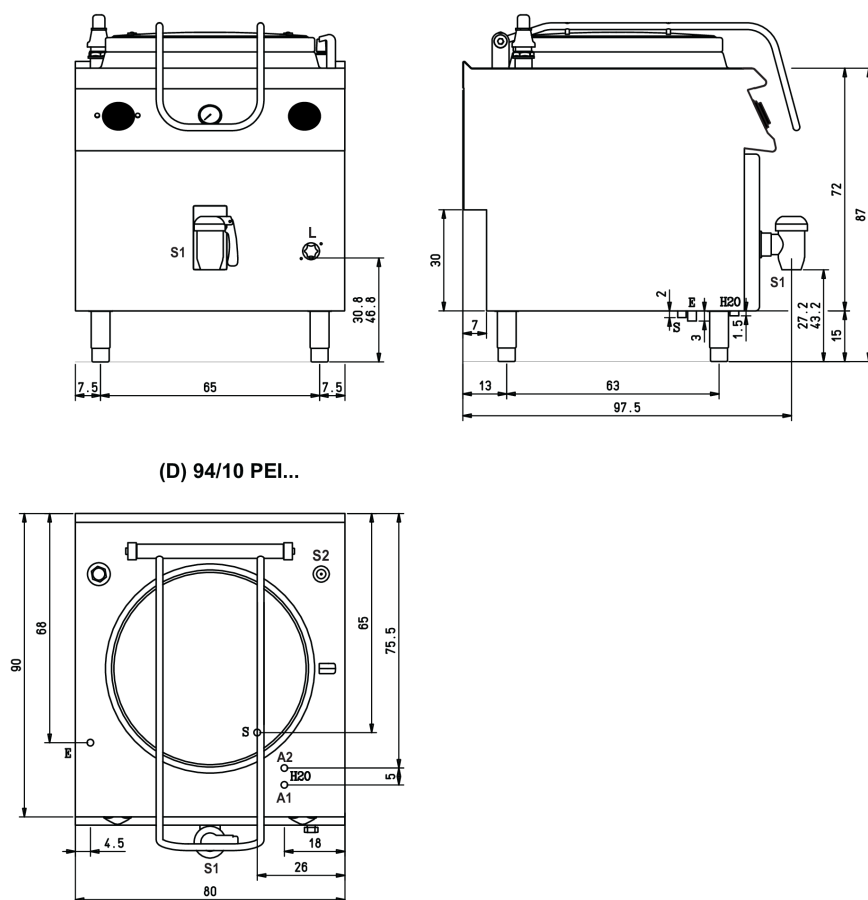

(D) 94/10 PEI...

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting
A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm
A2 = Fredda - Kalt - Cold - Froid - Fria - Koude
EN ISO 228-1 G 3/4
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
S Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain
 Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte
EN ISO 10226-1 R 3/4
S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting
 2"

100 LITRE INDIRECT ELECTRIC POT WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev.:
Zone:
Location:



CODICE
CR1356039

MODELLO
D94/10PEI10S

SERIE
DIAMANTE90

Product's PLUS

Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Possibility of hot or cold water loading



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.



Stainless steel tank with aisi 316
bottom



Indirect pans with automatic
condensate drain valve

100 LITRE INDIRECT ELECTRIC POT WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev.:
Zone:
Location:



CODICE
CR1356039

MODELLO
D94/10PEI10S

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
MA97350900	9C10	
MA97351000	9C15	
MA97352000	9CV10	
MA97353000	9CV15	
MA97349000	9-I5	
MA97354000	9-I10	
MA97355000	9-I15	
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment