

Lead Free + WorkForce/OptiFlow Pre-Rinse Faucets

LEAD FREE
ANSI 372 Compliant

workFORCE
SERIES



BKF-VSMPR-G
8" Value Splash Mount
Pre-Rinse

- Triple-Ply Hose Rated to 300 PSI
- 12" Wall Bracket
- 1/4 Turn Ceramic Cartridges
- Color Coded Hot & Cold Indicators
- 1/2" Female Inlets

LOW FLOW

Part Number

- BKF-LF-VSMPR-WB-G
- BKF-VSMPR-WB-G
- BKF-VSMPR-WB-AF8-G
- BKF-VSMPR-WB-AF10-G
- BKF-VSMPR-WB-AF12-G
- BKF-VSMPR-WB-AF14-G




Shown as
BKF-VSMPR-WB-AF12-G

Did You Know?

"Compared with a spray valve, using 3.2 gpm, a 1.6 gpm model in a small, quick-serve restaurant will save about 50,000 gallons (190,000 l) of water and \$1,000 in energy costs per year." - *BuildingGreen.com*

OptiFlow
SERIES

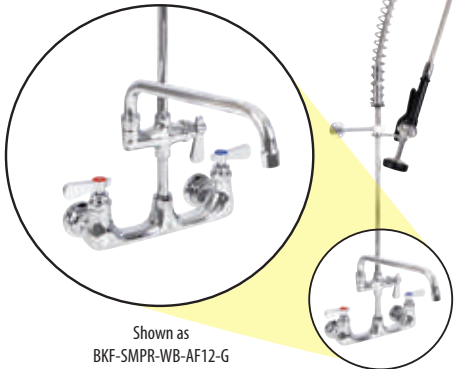

Shown as
BKF-SMPR-WB-AF12-G


BKF-SMPR-WB-G⁺
8" Splash Mount Heavy Duty
Pre-Rinse

- Triple-Ply Hose Rated to 300 PSI
- 12" Wall Bracket
- 1/4 Turn Ceramic Cartridges
- Integral Check Valves
- Color Coded Hot & Cold Indicators
- 1/2" Female Inlets

Part Number

- * BKF-LF-SMPR-WB-G
- BKF-SMPR-WB-G
- * BKF-SMPR-WB-AF8-G
- * BKF-SMPR-WB-AF10-G
- * BKF-SMPR-WB-AF12-G
- * BKF-SMPR-WB-AF14-G

OptiFlow
SERIES

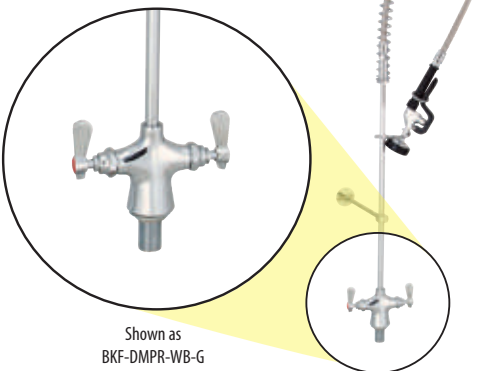

Shown as
BKF-DMPR-WB-G



H/C Mixing Hoses
Included

BKF-DMPR-WB-G⁺
Deck Mount Pre-Rinse

- Triple-Ply Hose Rated to 300 PSI
- 12" Wall Bracket
- 1/4 Turn Ceramic Cartridges
- Integral Check Valves
- Color Coded Hot & Cold Indicators

Part Number

- * BKF-LF-DMPR-WB-G
- BKF-DMPR-WB-G
- * BKF-DMPR-WB-AF8-G
- * BKF-DMPR-WB-AF10-G
- * BKF-DMPR-WB-AF12-G
- * BKF-DMPR-WB-AF14-G

[†] ASME 112.18.1 / CSA B125.1

CALIFORNIA
Energy Commission - (CEC)
Compliant Models Available
Call for more Info.

NOTE: (*) We have combined NSF Certified components to offer you a greater value. (Example: BKF-SMPR-WB-AF12-G) Though these part numbers are not Certified by NSF, each component that makes up the following part numbers are individually Certified by NSF and are thereby approved for use in your facility. For more information, please call 888-310-4393.