BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

P SERIES TOP MOUNT WARMING CABINETS

P SERIES TOP MOUNT WARMING CABINETS

Model: PHI1-1S

SOLID DOOR



7 YEAR WARRANTY
Parts and Labor

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, back and bottom)
- Interior is made of corrosion resistant aluminum
- Stainless steel breaker caps
- Full electronic control
- Heavy-duty cylinder locks
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80˚F to 180˚F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self-closing door with 120˚ hold open feature, with cam-lift hinges
- Stainless steel door liner
- 22 Gauge stainless steel door
- One-piece, snap-in magnetic door gasket
- Hinged front shroud
- Proximity door switch activates interior incandescent lighting
- 6” Legs
- 8’ Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- Pan slides
- Stainless steel interior
- 3” or 6” Casters
- Left or right door hinge (at time of order)

REFRIGERATION SYSTEM

- 15 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- Externally mounted blower system maintains even temperature through out the food zone area

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com


Please verify qualifying units by visiting:
www.energystar.gov/cfs

Specifications are subject to change without prior notice.
Date Issued 11/26 Printed in U.S.A.


BEVERAGE-AIR

P Series Warming Cabinets
Model: PHI1-1S


PLAN VIEW

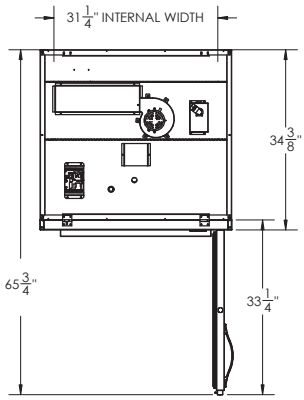

ELEVATION VIEW

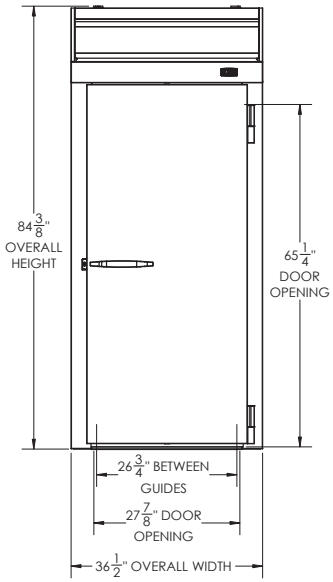

SIDE VIEW

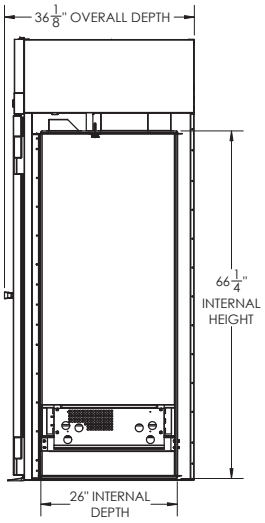

EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	36 1/2"
Depth Overall (in)	36 1/8"
Height Overall (in)	84 3/8"
Number of Doors	1
Depth with Door Open 90 °	65 3/4"
Door Openings (in)	27 7/8" x 65 1/4"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft).	33.6
Internal Width Overall (in)	31 1/4"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	66 1/4"

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 12" Top

ELECTRICAL DATA	
Full Load Amps	5.9/6.8
Cabinet Voltage	208-240/60/1
Total Wattage (Heaters & Fan @240V)	1500
Nema Plug (8' cord)	6-20P
SHIPPING DATA	
Gross Weight - Crated	320 lbs.
Height - Crated (in)	89"
Width - Crated (in)	44"
Depth - Crated (in)	43"

ELECTRICAL CONNECTION



208-240/60/1
NEMA 6-20P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 11/26 | Printed in U.S.A.

WELBILT
an AIi Group Company