

Project Name: _____

Item #: _____

Quantity: _____

VENTLESS HOODS**Equipex Small Appliance
Countertop Ventless Systems**

MODEL	COMPATIBLE WITH
SAV-G PALI	For toasters, panini grills, and surface heating equipment
SAV-O MISTRAL	Front-opening appliances (i.e. ovens or steamers)
SAV-U KONA	Taller heat-producing or rear-venting equipment

DESCRIPTION

The SA Vent is a countertop ventilation system for small appliances located outside the range of a kitchen ventilation hood - providing the freedom to locate small cooking appliances where you want them!

FEATURES:

- Removes grease-laden air, smoke and odors, improving the environment for kitchen staff and patrons
- Operates on standard 120v power
- Stainless steel construction with easy, tool-free filter access
- Cleansed air recirculates through the base
- Safety features: requires filters and front panel in place for unit to operate
- Patented Technology

WARRANTY

One-year limited parts & labor (excluding filters)

SAV-G PALI**SAV-O MISTRAL****SAV-U KONA****CERTIFICATIONS**

- 197 Safety Standards
- UL CSA 22.2 Certified, Canada Standards
- UL Classified to NSF-2/ ANSI 2
- EPA 202 Test Method Certified/ NFPA96 (PALI & MISTRAL models only)

UL 197
CSA 22.2

NSF-2


NEPA 96
EPA 202**PATENTS**

- 8522770
- 9335058
- 9557082


SPECIFICATIONS

MODEL	DIMENSIONS (HWD)	CAPACITY	ELECTRICAL	PLUG	HVAC	SHIP WEIGHT
SAV-G PALI UL/CSA/NSF/EPA202	31"x26"x29.75" Base: 26"W x 20.25"D	Holds up to 150 lbs & dimensions up to 26"W by 20"D (optional platform extensions available)	120V, 5.5 amps, 350watts, single phase. 6 foot power cord.	NEMA 5-15P	500 CFM	180 lbs Must be shipped common carrier.
SAV-O MISTRAL UL/CSA/NSA/EPA202	29"x26"x29.75" Base: 26"W x 20.25D					
SAV-U KONA UL/CSA/NSF	30.5" x 26" x 29.75" Base: 26"W x 20.25"D					


SAV-G PALI

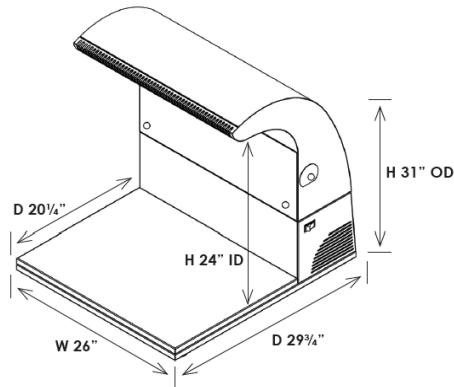

SAV-O MISTRAL

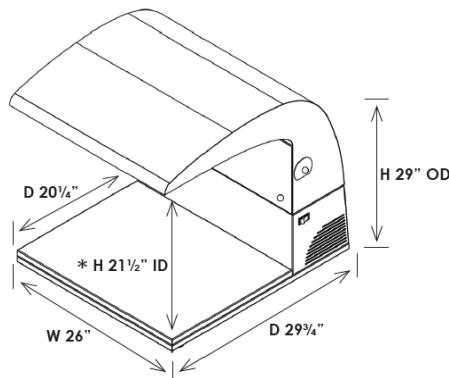

SAV-U KONA

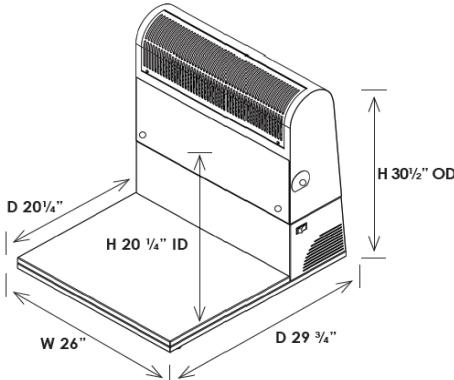

CONSTRUCTION

- 304 Stainless Steel, #4 finish
- Filters removable from the front of the equipment:
 - Angled baffle grease filter, cleanable and reusable
 - Electrostatic particulate filter removes smaller particles in the air - disposable
 - Activated charcoal filter to treat smoke and odors - disposable
- Removable grease collection container
- 6 foot power cord; cord exit located rear side of base
- Unit includes adjustable, leveling feet

AVAILABLE ACCESSORIES

- Left hand configuration
- Front and side platform extensions
- Height extensions (PALI & MISTRAL)
- Ansul Pre-Piping (UL300 Compliant)

NOTES/ CONDITIONS

- Clearances: 2" at right and left sides; 1" at rear - allow 8" for removal of grease cup
- Height of base with feet: 4.25"
- No installation; minimal assembly required
- Unit must be placed on level surface