


Synergy refrigerated multi-deck - Flat glass

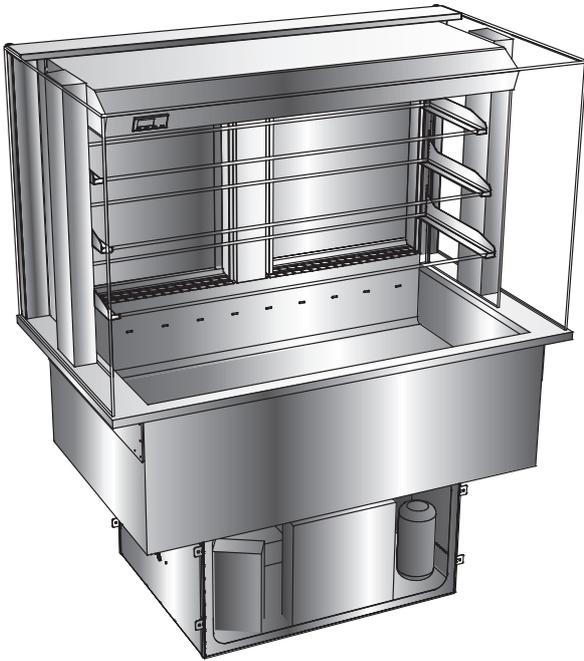

Model No: **SSRMT3** - 3 x GN1/1 size

Model No: **SSRMT4** - 4 x GN1/1 size

Model No: **SSRMT5** - 5 x GN1/1 size

Dimensions

Model ----- Top size ----- Cut out size ---- loading
SSRMT3 - 1177 x 660 x 710mm high - 1045 x 646mm ---- -3.0kW
SSRMT4 - 1504 x 660 x 710mm high - 1370 x 646mm ---- -3.0kW
SSRMT5 - 1831 x 660 x 710mm high - 1700 x 646mm ---- -3.6kW

Electrical Connection

220V/240V, 1 phase, 50 Hz.

Cable

Fitted with 2 metres of cable and 13 amp plug.

Refrigerant

R404a CFC free refrigerant

Construction

Top: Stainless Steel, Exterior: Stainless Steel, Interior: Stainless Steel

Operating conditions

Designed to comply with the operating requirements of EN ISO 23953 - 2:2005

Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s)

Additionally our own testing has shown that Synergy DRMT multi-tier units will maintain core product temperature of pre-chilled food below + 5°C in ambient temperatures up to 27°C at 50% relative humidity

Product Features

A refrigerated cabinet that maintains the temperature of pre-chilled food held in the well or on the shelves. Designed for self service.

Gantry Features

- Constructed from 50mm diameter, bright polished stainless steel.
- Fluorescent illumination to stainless steel light box.
- Toughened glass top and side cheeks
- Digital temperature control and readout.
- Three height adjustable glass shelves

Well Features

- 304 Stainless steel well - 170mm deep to accommodate drinks bottles under lower shelf
- Completely removable well giving easy access for cleaning and maintenance.

Options

Solid back versions instead of rear doors positioning against walls

Extras

Shelf edge ticket strips