

# DIRECT GAS COOKER LT.80

CODICE  
CR0990149

MODELLO  
D74/10PGD08

SERIE  
DIAMANTE70

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Possibility of hot or cold water loading  
Stainless steel tank with aisi 316 bottom

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

# DIRECT GAS COOKER LT.80

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990149

MODELLO  
D74/10PGD08

SERIE  
DIAMANTE70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990149
DEFINITION	D74/10 PGD08 GAS COOKER DIR. M80 80LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	109,800 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	850,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,831 m3
GROSS PACKING WEIGHT	120,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,015 kW
GAS POWER	17,00
GAS POWER (G25.3/25mbar)	16,50
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 PGD08

# DIRECT GAS COOKER LT.80

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....


CODICE  
CR0990149

MODELLO  
D74/10PGD08


SERIE  
DIAMANTE70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

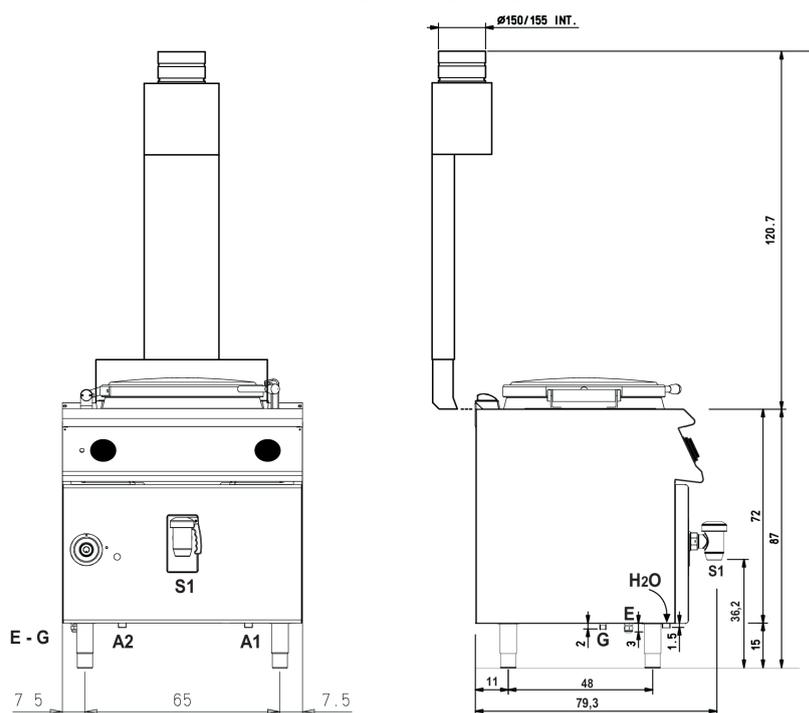

### (D) 74/10 PGD08

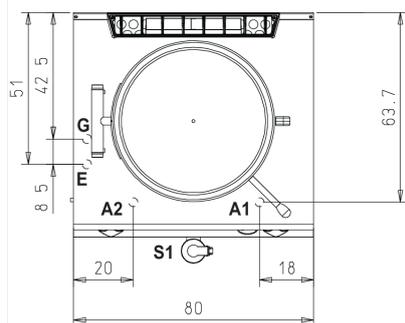

Legenda - Legende - Key  
 Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss  
 Water inlet - Arrivée eau - Union de agua  
 Wateraansluiting
- A1** = Calda - Heiss - Warm  
 Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold  
 Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica  
 Stopfbuchse - Electric cable stress relief  
 Presse étoupe de câble él. - Pisacable  
 Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss  
 Gas connection - Arrivée gaz - Union de gas  
 Gasaansluiting
- EN 10226-1 R 1/2**
- EN ISO 228-1 G 1/2 (DK)**
- S1** Scarico acqua - Wasserablauf - Water outlet  
 Vidange de l'eau - Desaguadero  
 Wateraftapaansluiting  
 1 1/2"

# DIRECT GAS COOKER LT.80

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990149

MODELLO  
D74/10PGD08

SERIE  
DIAMANTE70

## Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

Possibility of hot or cold water loading



Stainless steel tank with aisi 316 bottom



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



# DIRECT GAS COOKER LT.80

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990149

MODELLO  
D74/10PGD08

SERIE  
DIAMANTE70

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
CR0599730	7C8	
CR0599740	7CV8	
MA97349000	9-I5	
CR0592799	ZF8	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CMF0708	CMF0708	
CR0599649	7ZL	