

INDUCTION - 10kw - Top version

CODICE
CR1358239

MODELLO
D92/10TCII

SERIE
DIAMANTE90

Project:
Rev.:
Zone:
Location:



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.
External coatings and feet in stainless steel with Scotch Brite finish.
Working table height adjustable from 840 to 900 mm.
Range modularity: 200-400-600-800-1200
Wide range of accessories.

TECHNICAL SPECIFICATIONS

Unbreakable glass-ceramic top.
Serigraphs identifying cooking zones.
Safety sensor to prevent overheating.
Power adjustable to 12 levels
Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

Ensures the correct positioning and suitability of the pot

Power adjustable to 12 levels

Professional components tested to withstand intensive use over time

Safety sensor to prevent overheating.

Cooking zones with 5KW power

Mechanically controlled induction ready for IOT connection to Cloud

Serigraphs identifying cooking zones.

INDUCTION - 10kw - Top version

Project:
Rev.:
Zone:
Location:



CODICE
CR1358239

MODELLO
D92/10TCII

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1358239
DEFINITION	D92/10 TCII INDUCTION M40 TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	29,000 Kg
VOLUME (net)	0,090
PACKAGE LENGTH	460,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	570,000 mm
PACKAGE VOLUME	0,240 m3
GROSS PACKING WEIGHT	39,400 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	10,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10 TCII

INDUCTION - 10kw - Top version

Project:
Rev.:
Zone:
Location:




CODICE
CR1358239

MODELLO
D92/10TCII

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

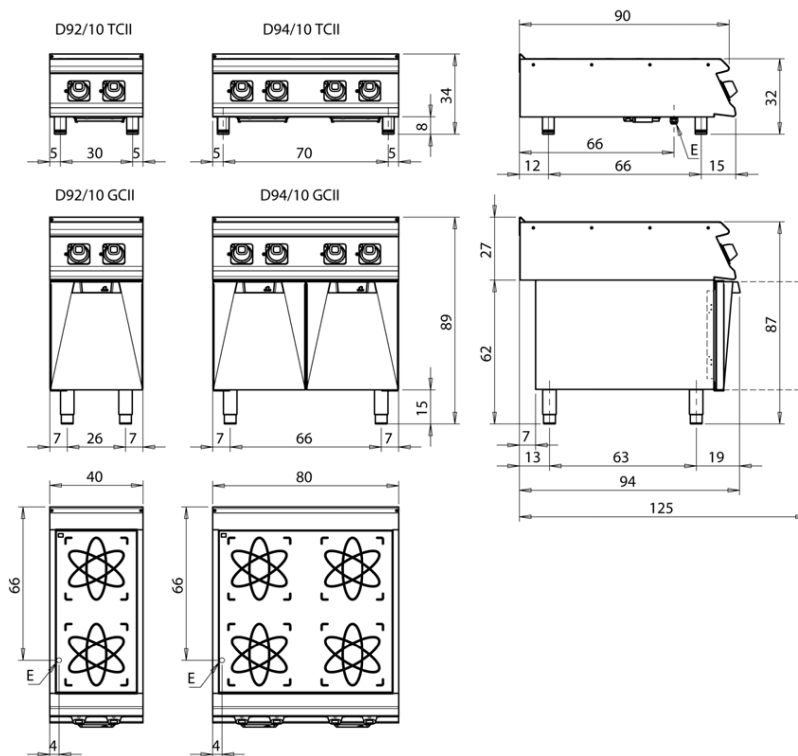

Legenda - Legende - Key - Légende - Leyenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwattel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

INDUCTION - 10kw - Top version

CODICE
CR1358239


MODELLO
D92/10TCII

SERIE
DIAMANTE90

Project:
Rev.:
Zone:
Location:



Product's PLUS



Cooking zones with 5KW power



Mechanically controlled induction
ready for IOT connection to Cloud



Power adjustable to 12 levels



Professional components tested to
withstand intensive use over time



Safety sensor to prevent overheating.

INDUCTION - 10kw - Top version

Project:
Rev.:
Zone:
Location:



CODICE
CR1358239

MODELLO
D92/10TCII

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1357499	4.0 IOT PRO	PRO Subscription - Cloud OLIS
CR1357479	4.0 IOT ENTRY	ENTRY Subscription - Cloud OLIS
CR1357559	OC-T4W	WIFI connectivity retrofit kit