



G3865F FRYER WITH FILTRATION



MODELS and ACCESSORIES

G3865F Twin pan, twin basket fryer with filtration supplied on castors.

- Side and back screens c/w draining shelf
- Suiting kit

KEY FEATURES

- Integrated filtration as standard
 - *Extends oil life and reduces running costs*
- Drain buckets, strainers and filter supplied as standard
 - *No hidden cost for these accessories*
- Stainless steel hob with twin mild steel pans
 - *Robust construction to withstand busy demands*
- Temperature range between 140 - 190°C
 - *Variable, precise control*
- Sediment collection zones
 - *Keep oil cleaner for longer*
- Piezo ignition
 - *Simple, trouble-free operation*
- Fast-acting safety thermostats
 - *Peace of mind if oil accidentally overheats*
- Lid supplied as standard
 - *Protects and extends oil life*
- Fish grids supplied as standard
 - *Keeps cooked portions off pan base*
- Large diameter drain valves
 - *For simple and efficient pan draining*
- Electrical supply required
 - *Simple to install and operate*

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR PLUS

G3865F FRYER WITH FILTRATION

MODEL DIMENSIONS (in mm)

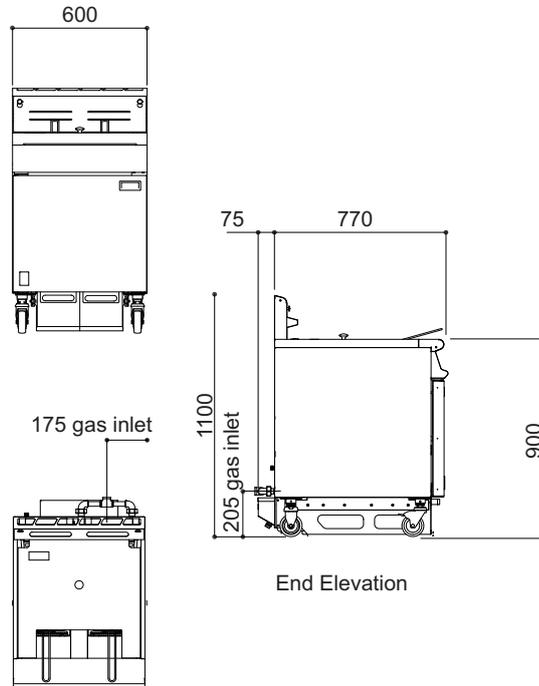

SPECIFICATION DETAILS

Total rating (natural and propane - kW - Nett)	2 x 16.7
Total rating (natural and propane - btu/hr - gross)	2 x 62,700
Inlet size (natural and propane)	3/4" BSPP **
Electrical supply voltage	230V~
Flow rate - natural (m ³ /hr)	3.5
Flow rate - propane (kg/hr)	2 x 1.23
Inlet pressure (natural and propane - mbar)	20 / 37
Operating pressure (natural and propane - mbar)	13 / 34.5
Oil capacity (litres)	2 x 15
Hourly chip output * (kg)	2 x 32
Weight (kg)	136
Packed weight (kg)	143

Notes:

* denotes pre-blanching, chilled 10mm size

** denotes single termination in 3/4" BSPP manifold