

U.S. Range

U-Series 48" Gas Restaurant Range With Convection Oven

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

• U48-8CS • U48-6G12CS • U48-4G24CS • U48-2G36CS • U48-G48CS



Model U48-8CS

Standard Features

- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel backguard, w/ removable stainless steel shelf
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large phenolic knobs
- Gas regulator
- Easy to access oven pilot
- Reinforced chassis
- Convection oven w/3 nickel-plated oven racks and removable rack guides w/ 1/3HP 120v 60 Hz singlephase fan motor
- Snap-action modulating oven thermostat low to 500° F
- Large oven w/ porcelain ribbed bottom & door, aluminized steel top, sides and back
- Square-cornered door design with strong, "keep-cool" oven door handle

Standard on Applicable Models:

- Ergonomic split cast-iron top ring grates
- Powerful 32,000 BTU/ 9.37 kW 2-piece cast-iron geometric open top burner
- 5/8" (15mm) thick steel griddle plate w/ manual hi/lo valve control, 23" (584mm) working depth surface, Standard on right, optional on left
- 4-1/4" (108mm) wide grease trough
- 18,000 BTU/5.27 kW cast iron "H" style

griddle burner per 12" (305mm) width of griddle

Options & Accessories

- Convection oven motor 240v 50/60HZ single-phase
- Snap-action modulating griddle control 175° to 425° F
- Hot top 12" (305mm) plate in lieu of two open burners, manual valve controlled w/ 18,000 BTU/5.27 kW cast iron "H" burner standard on left side
- Low profile 9-3/8" (238mm) backguard stainless steel front and sides
- Additional oven racks
- Four 6" (152mm) levelling swivel casters w/ front locking
- Flanged deck mount legs
- Celsius temperature dials
- Piezo spark ignition for pilots on griddles

Specifications

Gas restaurant series range with convection oven and storage base.

47-1/4" wide, 27" (686mm) deep work top surfaces.

Stainless steel front, sides and 5" wide front rail.

6" (152mm) legs with adjustable feet.

Eight powerful 2 piece 32,000 BTU/9.37 kW (Natural Gas), cast-iron open burners set in split cast-iron ergonomic grates.

Griddle or optional hot top with cast iron "H" style burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven bottom and door liner and heavy-duty,

"keep-cool" door handle.

Convection oven with 1/3HP 120v 60 Hz single-phase fan motor.

NOTE: Use only Garland certified casters and approved restraining devices.



Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668


www.garland-group.com
8108C
03/26



U-Series 48" Gas Restaurant Range With Convection Oven



U.S. Range

U-Series 48" Gas Restaurant Range With Convection Oven

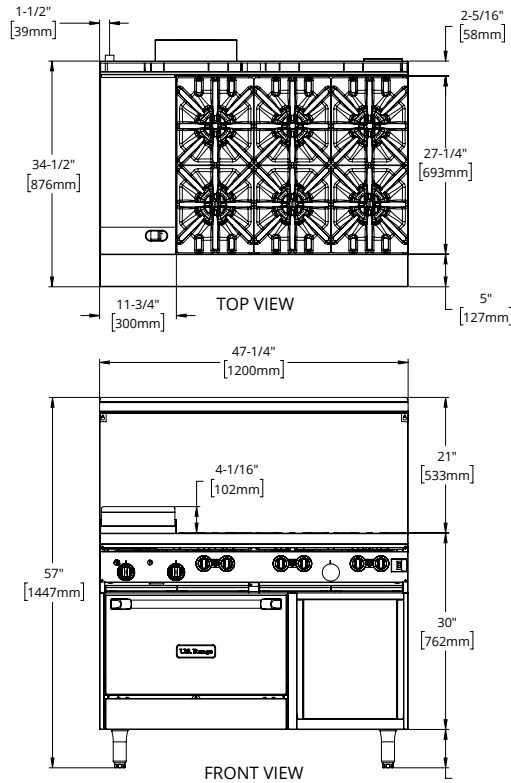

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft. This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

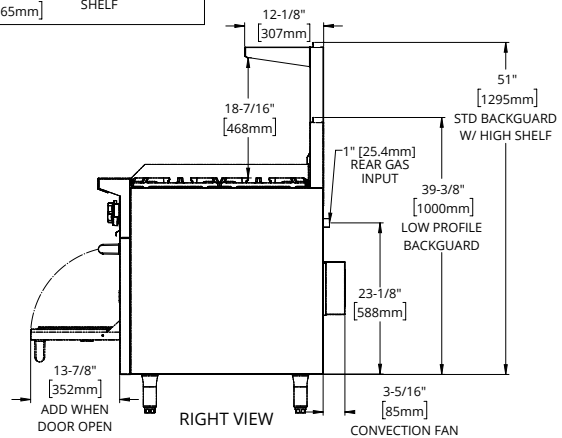

Model Number	Open Burners	Griddle	Oven(s)	Total BTU/Hr Natural	Shipping Weight		Shipping Volume
					Lbs.	Kg	
U48-8CS	8	—	(1) 26"	294,000	572	259	65
U48-6G12CS	6	12"	(1) 26"	248,000	569	258	65
U48-4G24CS	4	24"	(1) 26"	202,000	604	274	65
U48-2G36CS	2	36"	(1) 26"	156,000	639	290	65
U48-G48CS	—	48"	(1) 26"	110,000	659	299	65

Width In (mm)	Depth In (mm)	Height w/shelf In (mm)	Oven Interior-in (mm)			Combustible Wall Clearance-In (mm)		Entry Clearances In (mm)		Manifold Operating Pressure	
			Height	Depth	Width	Sides	Rear	Crated	Uncrated	Natural	Propane
47-1/4 (1200)	38-1/2 (974)	57 (1448)	13 (330)	22 (559)	26-1/4 (667)	14 (356)	6 (152)	37 (940)	36-1/2 (927)	4.5" WC 11 mbar	10" WC 25 mbar

Burner Ratings (BTU/Hr/kW)			
Gas Type	Open Top	Griddle/Hot Top	Convection Oven
Natural	32,000/9.37	18,000/5.27	38,000/11.13
Propane	26,000/7.61	18,000/5.27	32,000/9.38

Note: Convection ovens with 120V, 60 Hz, 1-phase, 3.4 amps motors are supplied with 6'/1829mm cord and plug (NEMA 5-15P); 240V, 50/60 Hz, 1-phase motors are not supplied with cord and plug and must have direct connect.

Garland/US Range reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8108C
03/26

