

Projec	t:		
Item: _			

Quantity:	

Utility Stock Truck




Aluminum two-tier Stock Truck provides an easy and comfortable means of transporting bins, boxes and other supplies around your facility. Two shelves allow you to move product at a convenient and ergonomic top shelf work height of 30 inches.

Aluminum construction allows these mobile units to be used for stocking and produce operations in

Aluminum construction allows these mobile units to be used for stocking and produce operations in any atmosphere. With a slim width of 21" and an ergonomic-friendly handle, these carts work great for stocking in narrow aisles.

- Framework is constructed of $1\frac{1}{4}$ " x $1\frac{1}{2}$ " x .070" wall tubing and $1\frac{1}{2}$ " x $1\frac{1}{2}$ x .070" wall tubing.
- Sheet top is constructed of .080" aluminum sheet.
- Handle is constructed of 15/16'' diameter pipe.
- Equipped with four $5^{\prime\prime}$ plate type swivel casters.
- One-Year Guarantee against workmanship and material defects.
- Lifetime Guarantee against rust and corrosion.

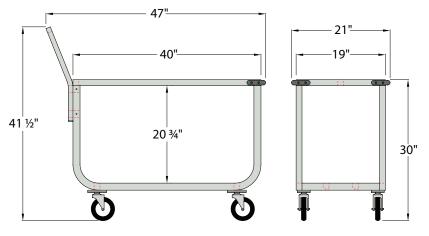

Utility Stock Truck

Model	Size	Weight	Top Shelf	Shelf	Ship	
No	W-H-L	Capacity	Height	Spacing	Lbs.	
96134BH	21" x 41½" x 47"	700 lbs.	30"	20¾"	42	

Four 5" plate type swivel casters.

Top shelf measures 19"W x 40"L without bumpers.

Handle and Corner Bumpers are standard equipment.



New Age Industrial Corp., Inc. || NewAgeIndustrial.com || Made in the USA

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || **Phone: (800) 255-0104 • (785) 877-5121** || Fax: (877)-877-7687 • (785) 877-2616