



## E3101 OTC SIX HOTPLATE RANGE



### KEY FEATURES

- Six fast-acting circular hotplates
  - Reduces heat up times, energy efficient
- Full width, removable drip tray
  - Retains spillages and keeps unit clean
- Vitreous enamelled oven chamber
  - Easy to clean and to keep clean
- Wide oven temperature range of 100 - 250°C
  - Ideal to prepare a wide variety of food
- Glass panels in oven doors
  - Monitor cooking without losing valuable heat
- Ovens have twin doors with individual catches
  - Retains heat within the oven chamber
- Oven has 5 shelf positions to allow 2 shelf cooking
  - Versatile, ideal for a wide range of menu items
- Low profile door handles
  - Reduces intrusion into work space
- Laser-etched control icons
  - Permanent, indelible markings

### MODELS and ACCESSORIES

**E3101OTC 6HP** - Six hotplate range - fan-assisted oven

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

### INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






# DOMINATOR<sup>PLUS</sup>

## E3101 OTC SIX HOTPLATE RANGE

### MODEL DIMENSIONS (in mm)

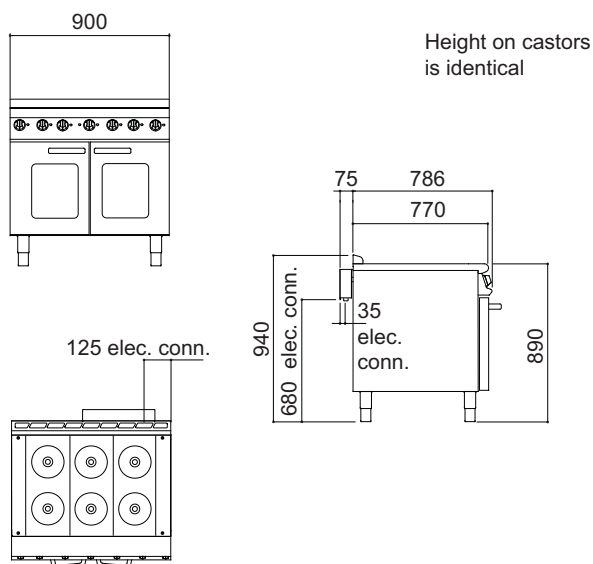

### SPECIFICATION DETAILS

|                                           | <b>E3101 OTC 6HP</b>       |
|-------------------------------------------|----------------------------|
| Electrical rating (kW)                    | 20.2                       |
| Electrical supply voltage                 | 400V 3N~ / 230V~           |
| Minimum electrical supply 230V~ (amps)    | 100                        |
| Minimum electrical supply 400V 3N~ (amps) | 32                         |
| Electrical current split (amps)           | L1: 24 / L2: 24 / L3: 28.3 |
| Hotplate rating (kW)                      | 6 x 2.3                    |
| Total oven element rating (kW)            | 6.4 (2 x 3.2)              |
| Oven dimensions (w x d x h - mm)          | 700 x 535 x 430            |
| Oven shelf (w x d - mm)                   | 700 x 535                  |
| Gastronorm compatibility                  | 2/1                        |
| Weight (kg)                               | 157                        |
| Packed weight (kg)                        | 175                        |