

HEAVY-DUTY UTILITY CARTS

For Multi-Purpose Back-Up

"UC" AND "UCU" SERIES

These heavy-gauge stainless steel, super tough carts are built to store and transport heavy loads with ease

- 1 All welded, 16 gauge stainless steel reinforced shelves are designed to be remarkably durable and roll easily when moving your heaviest loads
- 2 Made for transport applications - FWE utility carts feature a tubular welded base frame designed to absorb vibration and shock during transport
- 3 Each shelf is 24" deep - enough depth to hold serving trays and more
- 4 Models are available with 3, 4, 5, or 6 shelves, and can be ordered with 3 edges flanged up (UCU) or all edges flanged down (UC)
- 5 Super-duty 8" x 2" maintenance-free EZ Roll casters provide maximum maneuverability, even when fully loaded
- 6 Quick and easy customization - custom sizing and shelf spacing are available to fit your unique operation

6

MODEL NOMENCLATURE

Utility Cart Space Between Shelves, In.
 UC - 5 12 - 48 Full Unit Width, In.
 Number of Shelves

4


UC models have shelf edges that are flanged downward.

4

UCU models have shelf edges that are flanged upwards on three sides.



*Two year limited warranty



All-Welded Stainless Steel Design



Built for Transport



8" EZ Roll Casters




Custom Sizing and Spacing Available

STAINLESS STEEL

SPECIFICATIONS

HEAVY-DUTY UTILITY CARTS

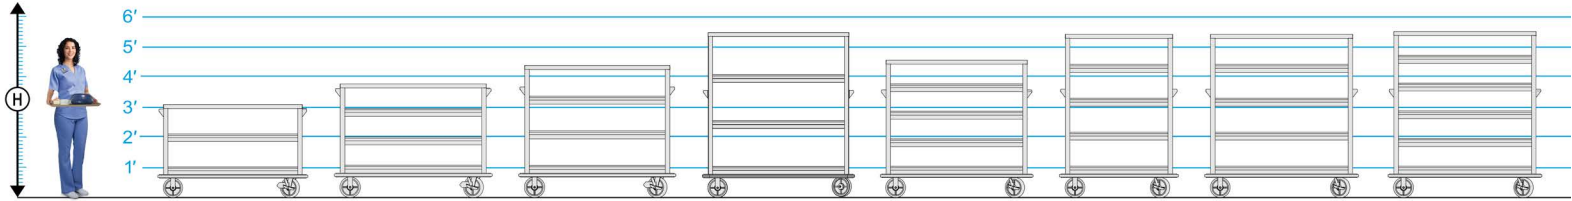


Shelf Edges Down



Shelf Edges Up
(3 Sides Up, Front Side Down)

MODEL NUMBER	NUMBER OF SHELVES	SHELF CLEARANCE (mm)	SELF SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN.(mm) (Height Includes Casters)			CASTER SIZE	SHIP WT. LBS. (KG)	CONSULT FACTORY FOR SHIPPING CLASS
				HIGH "H"	DEEP "D"	WIDE "W"			
UC	3	12" (305)	24" x 57" (635 x 1448)	38.5" (925)	28" (711)	62" (1575)	8"	260 (118)	
	4	9.5" (242)	24" x 57" (635 x 1448)	44.5" (1130)	28" (711)	62" (1575)	8"	275 (125)	
	4	12" (305)	24" x 57" (635 x 1448)	52" (1600)	28" (711)	62" (1575)	8"	285 (230)	
	4	17" (432)	24" x 57" (635 x 1448)	67" (1702)	28" (711)	62" (1575)	8"	305 (139)	
	5	9.5" (242)	24" x 57" (635 x 1448)	55.5" (1397)	28" (711)	62" (1575)	8"	310 (141)	
	5	12" (305)	24" x 43" (635 x 1093)	55.5" (1397)	28" (711)	48" (1220)	8"	300 (137)	
	5	12" (305)	24" x 57" (635 x 1448)	65.5" (1651)	28" (711)	62" (1575)	8"	345 (157)	
	6	9.5" (242)	24" x 57" (635 x 1448)	66.5" (1689)	28" (711)	62" (1575)	8"	365 (166)	
UCU	3	12" (305)	24" x 57" (635 x 1448)	38.5" (925)	28" (711)	62" (1575)	8"	240 (109)	
	4	9.5" (242)	24" x 57" (635 x 1448)	44.5" (1130)	28" (711)	62" (1575)	8"	260 (118)	
	4	12" (305)	24" x 57" (635 x 1448)	52" (1600)	28" (711)	62" (1575)	8"	285 (130)	
	4	17" (432)	24" x 57" (635 x 1448)	67" (1702)	28" (711)	62" (1575)	8"	300 (137)	
	5	9.5" (242)	24" x 57" (635 x 1448)	55.5" (1397)	28" (711)	62" (1575)	8"	320 (146)	
	5	12" (305)	24" x 43" (635 x 1093)	55.5" (1397)	28" (711)	48" (1220)	8"	300 (137)	
	5	12" (305)	24" x 57" (635 x 1448)	65.5" (1651)	28" (711)	62" (1575)	8"	335 (152)	
	6	9.5" (242)	24" x 57" (635 x 1448)	66.5" (1689)	28" (711)	62" (1575)	8"	365 (166)	



**Looking for
3-Side Enclosed
Utility Carts?**

Scan QR Code to Access
the UCE Spec Sheet

Specification Page: 5-09-04000

CONSTRUCTION. Heliarc welded construction of stainless steel. Welded tubular base frame shall be 1.5" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing stress plates at corners. Uprights shall be 10-gauge stainless steel.

BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond handles for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

CASTERS. 8" Super-duty (extra-wide) polyurethane tire casters with Zerk grease (lubrication) fittings in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

PUSH BARS. Two (2) heavy-duty, 1" diameter tubular stainless steel push handles welded in place.

SHELVES. Shelves shall be heavy-duty 16-gauge, type stainless steel, die-formed, welded to 10-gauge stainless steel corner angles. Underside of each shelf shall be reinforced with an extra heavy-gauge stainless steel channel. Each shelf shall be capable of carrying up to 200 lbs. of distributed load. All models shall have the top shelf with edges flanged down.

SHELVES

Custom shelf size & spacing
Reinforced shelves

CASTERS

Upgraded casters
6 caster configuration

EXTRAS

Top corner bumpers