

GARLAND®

G-Series 60" Gas Restaurant Range With Flame-Failure & Electronic Ignition

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- GFE60-10RR
- GFE60-8G12RR
- GFE60-6G24RR
- GFE60-4G36RR



Model GFE60-10RR

Standard Features

- Flame-failure protection: all burners
- Electric spark ignition on all burners, requiring single-phase 115V 60Hz or 240V 50Hz (specify)
- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel low-profile backguard
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large phenolic knobs
- Gas regulator
- Reinforced chassis

Standard on Applicable Models:

- Ergonomic split cast-iron top ring grates
- 26,000 BTU/7.61 kW 2-piece cast-iron Starfire® open top burner
- 5/8" (15mm) thick steel griddle plate with thermostatic griddle control 175° to 425° F (79° to 218°C), 23" (584mm) working depth surface, on right; optional on left
- Front-serviceable griddle
- 4-1/4" (108mm) wide grease trough
- 18,000 BTU/5.27 kW cast-iron "H" style griddle burner per 12"(305mm) width of griddle
- 38,000 BTU/ 11.13 kW cast-iron "H" style oven burner
- Snap-action modulating oven

thermostat low to 500° F

- Easy to access oven pilot
- Nickel-plated oven rack and 3-position removable oven rack guide
- Large porcelain oven interior, fits standard sheet pans in both directions for standard ovens
- Square-cornered door design with strong, "keep-cool" oven door handle

Options & Accessories

- Manual hi/lo valve griddle control in lieu of thermostatic control
- Hot top 12" (305mm) plate in lieu of two open burners, manual valve controlled w/18,000 BTU/5.27 kW cast-iron "H" burner standard on left side
- Stainless steel backguard with removable high shelf
- Additional oven racks
- Four 6" (152mm) levelling swivel casters w/front locking
- Flanged deck mount legs
- Celsius temperature dials

Specifications

Gas restaurant series range with large capacity standard oven.

59-1/16" (1500mm) wide, 27" (686mm) deep worktop surfaces.

Stainless steel front, sides and 5" wide front rail.

6" (152mm) legs with adjustable feet.

Total flame-failure protection for all burners.

Electric spark ignition on all burners, requiring single-phase 115V 60Hz or 240V 50Hz (specify)

Ten Starfire® 2-piece, 26,000 BTU/7.61 kW (natural gas), cast-iron open burners set in split cast-iron ergonomic grates.

Griddle or optional hot top with cast-iron "H" style

burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven interior.

Heavy cast-iron "H" oven burner rated 38,000 BTU/11.13 kW (natural gas).

Oven controlled by even-bake, fast recovery snap-action modulating oven thermostat.

Available with storage base in lieu of oven.

NOTE: Use only Garland certified casters and approved restraining devices.




Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668


www.garland-group.com
8084D
01/26



G-Series 60" Gas Restaurant Range /
Flame-Failure & Electronic Ignition

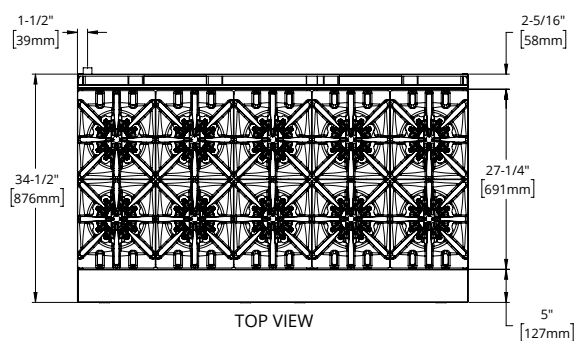

TOP VIEW

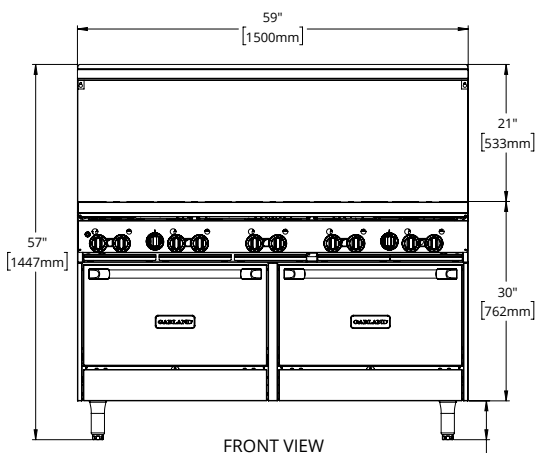


FRONT VIEW

6" [153mm]
OPTIONAL 6" [153mm] CASTERS

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft.

This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

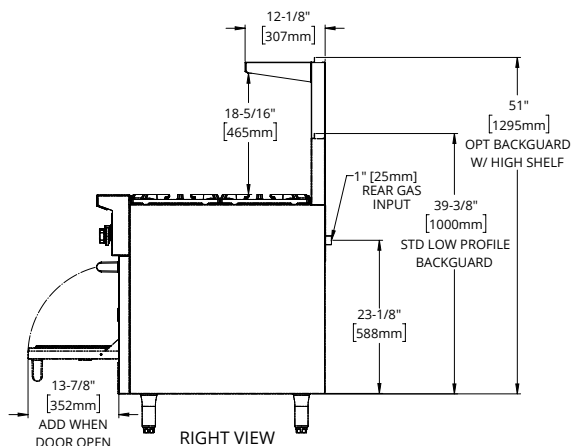

RIGHT VIEW

Model Number	Description	Total BTU/Hr Natural Gas	Shipping Information		
			Lbs.	Kg	Cu. Ft.
GFE60-10RR	Ten Open Burners w/Two Standard Ovens	336,000	726	329	79
GFE60-8G12RR	12" Griddle, Eight Open Burners w/Two Standard Ovens	302,000	756	343	79
GFE60-6G24RR	24" Griddle, Six Open Burners w/Two Standard Ovens	268,000	775	342	79
GFE60-4G36RR	36" Griddle, Four Open Burners w/Two Standard Ovens	234,000	826	375	79

Width In (mm)	Depth In (mm)	Height w/LPBG In (mm)	Oven Interior-in (mm)			Combustible Wall Clearance-In (mm)		Entry Clearances In (mm)		Manifold Operating Pressure	
			Height	Depth	Width	Sides	Rear	Crated	Uncrated	Natural	Propane
59-1/16 (1500)	34-1/2 (876)	45-3/8 (1153)	13 (330)	26 (660)	26-1/4 (667)	14 (356)	6 (152)	37 (940)	36-1/2 (927)	4.5" WC 11 mbar	10.0" WC 25 mbar

LPBG = Low Profile Backguard

Burner Ratings (BTU/Hr/kW)			
Gas Type	Open Top	Griddle/Hot Top	Standard Oven
Natural	26,000/7.61	18,000/5.27	38,000/11.13
Propane	26,000/7.61	18,000/5.27	32,000/9.38

Electrical Supply: GFE models with 115V 60 Hz 1-phase, 0.1 amps; 6 ft. (1.8m) power cord with NEMA 5-15P plug. Power cord not supplied with 240V 50 Hz 1-phase 0.05 amps models.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8084D
01/26

