Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



E302

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Aerohot™ Foodservice
Hot Food Units - Electric

- ■ **E302/EP302** 2 top openings
- ■ **E303/EP303** 3 top openings
- ■ **E304/EP304** 4 top openings
- ■ **E305/EP305** 5 top openings

TOP:

- ■ 20 gauge, stainless steel
- ■ Die-stamped openings - 12" x 20"
- ■ Poly carving board - 7"W x ½" thick with 18 gauge stainless steel support shelf and die-stamped brackets

HEAT COMPARTMENTS:

- ■ With 8" deep galvanized liner
- ■ Insulated with 1" thick fiberglass all four sides and bottom
- ■ Exposed dome-type element in each compartment

BODY AND INTERIOR SHELF:

- ■ 20 gauge, 430 Series stainless steel body
- ■ 20 gauge, 430 Series stainless steel undershelf
- ■ 430 Series stainless steel tubular legs with adjustable plastic feet

ELECTRICAL INFORMATION:

- ■ Wired to operate with 500 watt elements in 120V or with 750 watt elements in 208V and 240V
- ❑ Single phase AC current
- ■ Each section with infinite switch
- ■ Permanently wired, 6' long cord and plug provided

OPTIONS:

- ❑ 3-phase wiring
- ❑ Stainless steel heat compartment liner
- ❑ Drop type brackets for cutting board
- ❑ Stainless steel feet
- ❑ Adapter plates
- ❑ Insets/Inset Covers
- ❑ Spillage pans
- ❑ Dish Shelf
- ❑ Trayslides & Workshelves
- ❑ Foodshields

CERTIFICATIONS:

c UL US LISTED


NSF/ANSI 4

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com


Specification subject to change


WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

Aerohot®

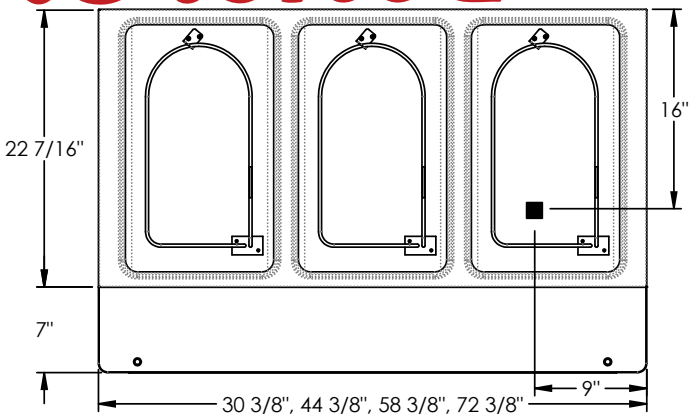

LEGEND
■ ELECTRICAL CONNECTION

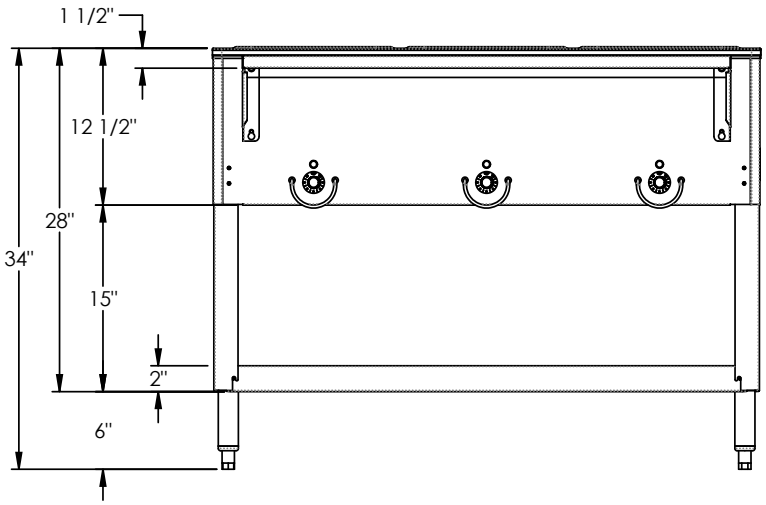

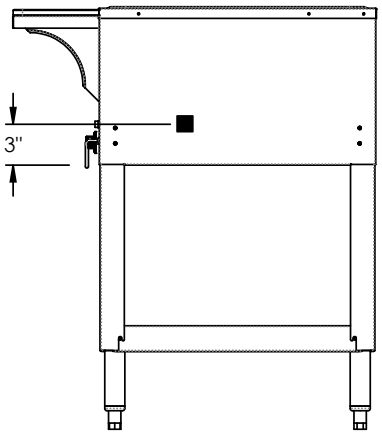

DIMENSIONS: (Consult factory for 3-phase electrical requirements and other options.) **FREIGHT CLASS: 85**

Model	Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm			lbs	kg
E302/EP302	30 3/8	77.2	22 7/16	57.1	34	86.4	2	23.4	81/90	36.8/40.9
E303/EP303	44 3/8	112.8	22 7/16	57.1	34	86.4	3	32.5	107/114	48.6/51.8
E304/EP304	58 3/8	148.3	22 7/16	57.1	34	86.4	4	41.5	138/144	62.7/65.5
E305/EP305	72 3/8	183.9	22 7/16	57.1	34	86.4	5	50.5	165/172	75.0/78.2

ELECTRICAL SPECIFICATIONS: CONTACT FACTORY: Electric values & plug configurations change for 3 phase or when adding electric options.

Model	120 Volt - 500 watt elements			208 Volt - 750 watt elements			240 Volt - 750 watt elements		
	Watts	Amps	NEMA	Watts	Amps	NEMA	Watts	Amps	NEMA
E302/EP302	1000	8.3	5-15	1500	7.2	6-20	1500	6.3	6-20
E303/EP303	1500	12.5	5-15	2250	10.8	6-20	2250	9.4	6-20
E304/EP304	2000	16.7	L5-30	3000	14.4	6-20	3000	12.5	6-20
E305/EP305	2500	20.8	L5-30	3750	18.0	L6-30	3750	15.6	6-20

*Cord and NEMA plug included

Duke
Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2025, Duke Manufacturing Co.