



ELECTRIC TILTING SKILLET

Job

Item#



MODEL	CAPACITY	
ETS-30	30 Gallon	114 Liter
ETS-40	40 Gallon	152 Liter

OPERATION SHALL BE BY:

Electric heating elements equipped for operation on:

- 208 VAC, 1 or 3 phase, 50/60 Hz
- 220 VAC, 1 or 3 phase, 50/60 Hz
- 240 VAC, 1 or 3 phase, 50/60 Hz
- 380/220 VAC, 3 phase, 50/60 Hz
- 415/240 VAC, 3 phase, 50/60 Hz

OPTIONAL ITEMS AT EXTRA COST:

- 380 VAC, 3 phase, 50/60 Hz
- 415 VAC, 3 phase, 50/60 Hz
- 480 VAC, 3 phase, 50/60 Hz
- Etched liter markings (LMS-30, LMS-40)
- 2" (51 mm) draw-off valve with strainer (TVT-2BP)
- 3" (76 mm) draw-off valve with strainer (TVT-3BP)
- 60 minute mechanical timer mounted on left console
- 4" All swivel casters, (2) with foot brakes, set of 4 (SCK-1)
- Correctional package

ACCESSORIES:

- Pan carrier (PC-1)
- Steam pan insert (SPI-30, SPI-40)
- 12" Single pantry faucet with swing spout (SF-12)
- 12" Double pantry faucet with swing spout (DF-12)
- Single pantry rinse spray head with 68" hose (SP-RSH)
- Double pantry rinse spray head with 68" hose (DP-RSH)
- Faucet bracket (FB)

SPECIFICATIONS:

Shall be a Crown model _____, electrically heated tilting skillet, c-CSA-us and NSF Certified. The skillet shall be of one piece covered corner, 10 gauge T-304 stainless steel with a #4 exterior finish and a polished interior with etched gallon markings. Heating shall be accomplished by electric elements embedded in a full 1-3/8" (35 mm) thick aluminum casting bolted to the underside of the pan for even heat distribution across the entire surface. Pan shall pivot on side trunnions connected to the gear and control consoles. The consoles shall be drip proof, stainless steel clad and shall be supported by an all welded 1-5/8" (41 mm) stainless steel pipe frame with front legs fitted with adjustable bullet feet and rear legs fitted with flange adjustable feet for securing to the floor. The worm and gear tilt mechanism shall allow the pan to tilt forward manually for complete emptying of contents. The controls shall be integrally mounted in the left console and shall include a thermostat, power switch and pilot light. As a safety feature the pan shall be equipped with a high limit thermostat on each element assembly to shut down operation should the thermostat fail.


Convenience features shall include a spring assist hinged stainless steel cover with handle and no drip condensate guide, vent port with swing cover and a removable pour strainer on the pour lip.

The skilled shall operate in a temperature range of 160°F to 445°F (71°C to 229°C) with a high temperature safety cut-off at 500°F (260°C).



Models: ETS-30 ETS-40

MODEL	SHIPPING WEIGHT	MINIMUM CLEARANCE	
		SIDES	6" (152)
ETS-30	501 lbs. (228 kg)	SIDES	6" (152)
ETS-40	547 lbs. (248 kg)	BACK	6" (152)

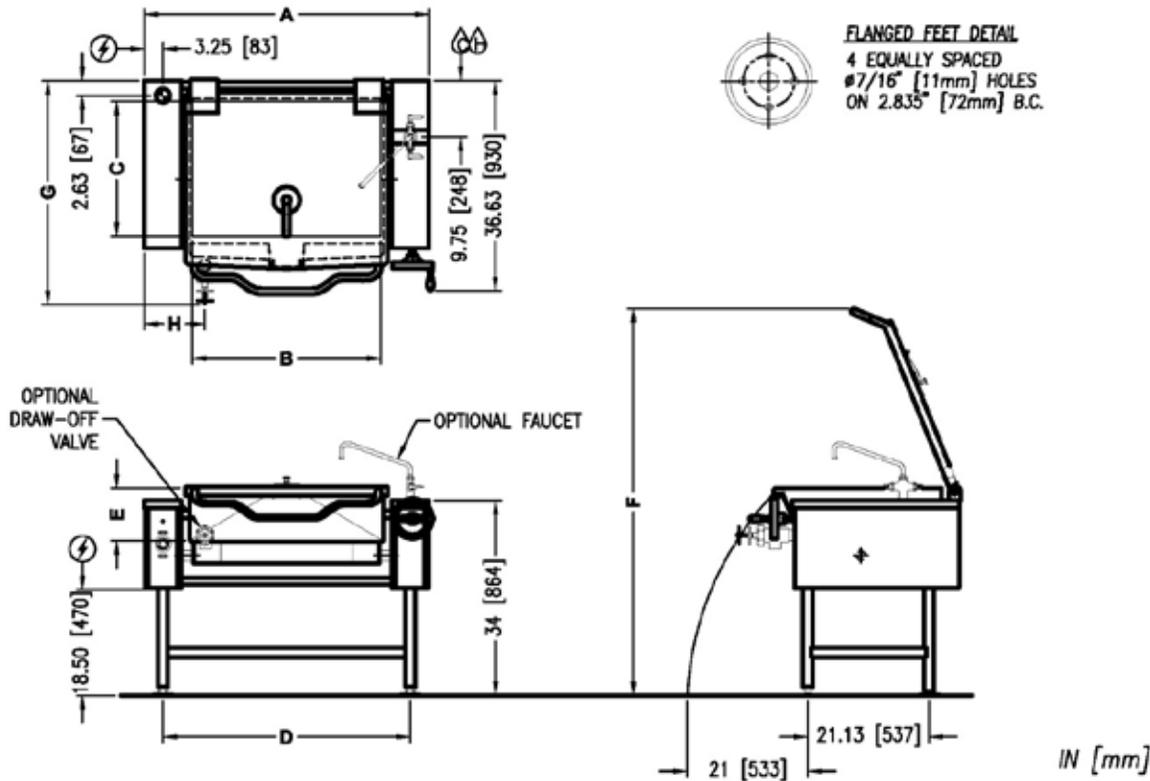

DIMENSIONS

MODEL	CAPACITY	A	B	C	D	E	F	G		H	
								Ø2	Ø3	Ø2	Ø3
ETS-30	30 Gallons (114 liters)	49.75" (1264)	32.88" (835)	23.50" (597)	43.13" (1095)	9.25" (235)	67.63" (1718)	39" (991)	43.5" (1105)	10.63" (370)	11.13" (283)
ETS-40	40 Gallons (152 liters)	59" (1499)	42.88" (1089)	23" (584)	52.50" (1334)	9.25" (235)	67.63" (1715)	38.75" (984)	43.25" (1099)	10.25" (260)	10.75" (273)

ELECTRICAL CHARACTERISTICS

MODEL	kW	
	STANDARD	OPTIONAL
ETS-30	18	12
ETS-40	27	18

kW	PHASE	AMPS PER LINE					
		208V	220V	240V	380V	415V	480V
12	1	57.7	54.5	50.0	N/A	N/A	N/A
	3	33.3	31.5	28.9	18.2	16.7	14.4
18	1	86.5	81.8	75.0	N/A	N/A	N/A
	3	50.0	47.2	43.3	27.3	25.0	21.7
27	3	75.0	70.9	65.0	41	37.6	32.5

SERVICE CONNECTIONS

⚡ – ELECTRICAL CONNECTION: As specified on data plate.

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**



70 Oakdale Road, Toronto ON, Canada M3N 1V9
(919) 762-1000 www.crownsteamgroup.com