



WT-12-SS

NOTE: Faucet handles not included.

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Wall Mount Towers

WT-__-SS

Size: Specify the number of faucets from
4, 5, 6, 8, 10, 12

Standard Features

- 1/4" shanks with 3/16" restriction lines
- All stainless steel including faucets
- Grainline finish
- Integral drain pan with lift-out perforated inserts
- Built-in wall mounting bracket with open back
- Removable front cover for access to wall mounting flange

Configurable Options

- 4, 5, 6, 8, 10, or 12 faucet sizes
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Back or bottom beverage line orientation

Mounting Details

Specifications

Materials

- Stainless steel faucets and shanks
- Stainless steel body and drain pan
- Galvanized steel inner structure on glycol chilled models

Shank Sizes

- 1/4" I.D. with 3/16" fittings


Drains

- 1/2" tailpiece on drain pan



Intertek

4004503
Conforms to NSF/ANSI STD 372

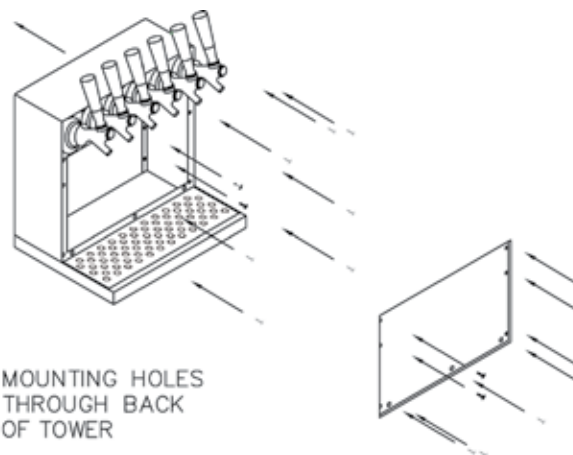

Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:


Wall Mount Towers

Drawings



FRONT ELEVATION

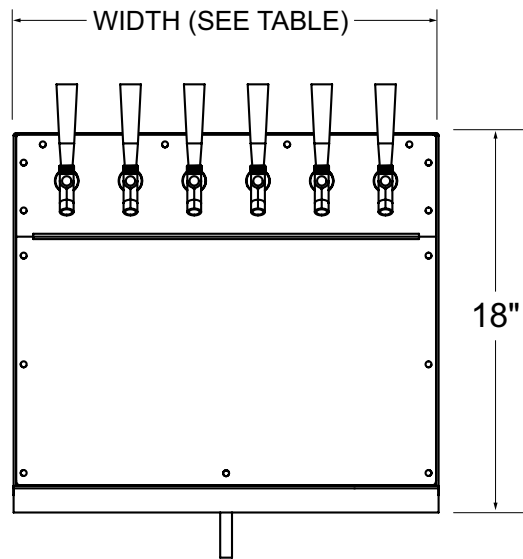

PLAN VIEW

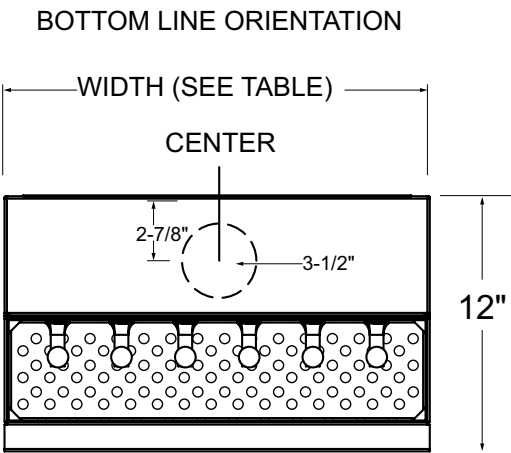

SIDE ELEVATION

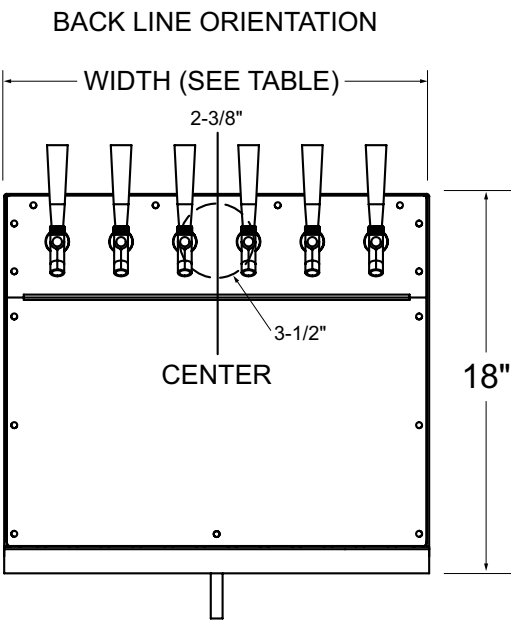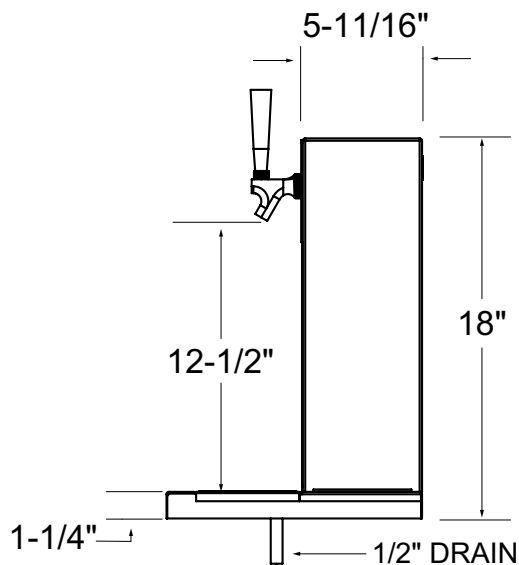

Wall Mount Towers	
Number of faucets	Width
4	14"
5	17"
6	20"
8	26"
10	32"
12	38"

Note: Faucet handles not included.