




GAS

THERMOSTATICALLY CONTROLLED GROOVE GRIDDLE

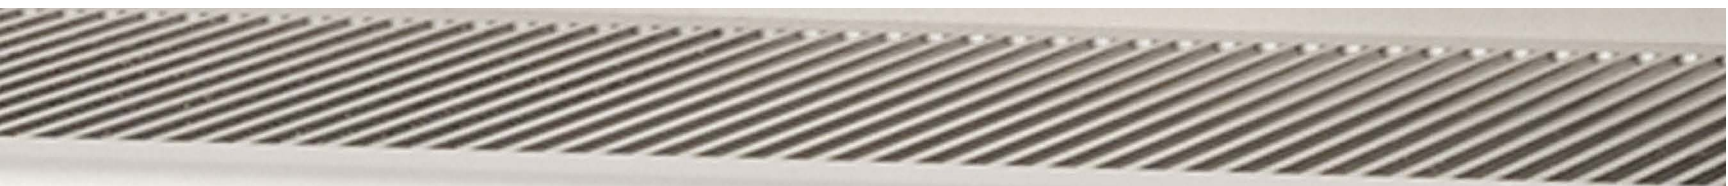

IGG-36

Model Numbers

IGG-24

IGG-36


IGG-48

IGG-60

IGG-72



Stainless steel grease gutter and 1 gal. (3.8 L) grease can.



Aeration baffles between burners spread heat across the griddle plate for even heating.

BURNERS

- Thermostat maintains selected temperature during peak hours.
- Each griddle burner is rated at 30,000 BTU (9KW).
- Aeration baffles between burners spread the heat evenly across the entire griddle surface.
- Burners are located every 12" (305 mm).
- Each burner has an adjustable gas valve and continuous pilot for instant ignition.

EXTERIOR

- Stainless steel front, sides, splash guard, and ledge.
- Stainless steel ledge is one piece rolled for cleaning convenience.
- Range match profile when placed on a refrigerated base or equipment stand.
- Control knobs are constructed of virtually unbreakable plastic for protection grip.
- 4" (102 mm) stainless steel legs are included.
- One year parts and labor warranty.

GRIDDLE PLATE

- Thick 1" (25 mm) thick steel plate is grooved to provide attractive char-broiler marks without actually char-broiling.
- Full 24" (610 mm) plate depth for more cooking surface.
- Surface is ideal for a large range of menu items.
- Optional chrome griddle top is available as an option.

GREASE MAINTENANCE

- Stainless steel grease gutter is 4" (102 mm) wide.
- Large 1 gal (3.8 L) capacity grease can has a weep hole to indicate when full.
- Grease can removes easily.




1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



GAS

THERMOSTATICALLY CONTROLLED GROOVED GRIDDLE

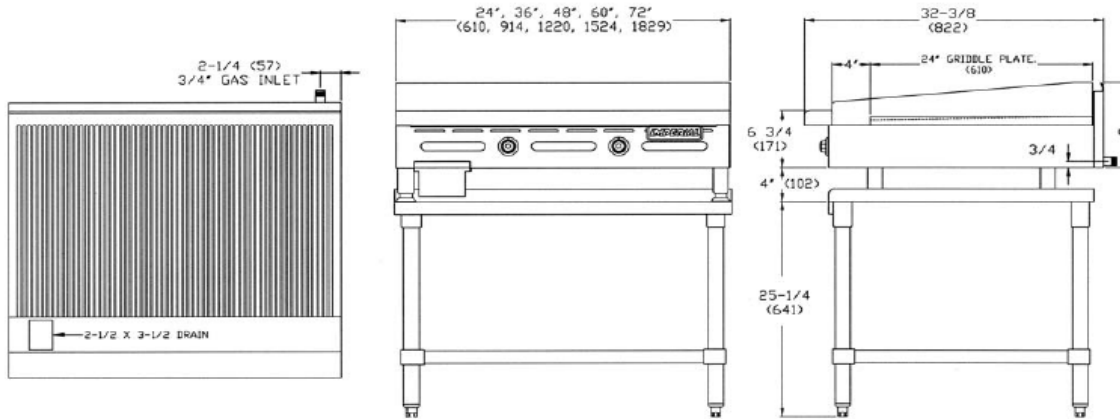

MODEL	WIDTH	NUMBER OF BURNERS	GAS OUTPUT BTU (KW)	SHIP WEIGHT (KG) LBS
IGG-24	24" (610)	2	60,000 (18)	(136) 300
IGG-36	36" (914)	3	90,000 (26)	(195) 430
IGG-48	48" (1219)	4	120,000 (35)	(261) 575
IGG-60	60" (1524)	5	150,000 (44)	(328) 725
IGG-72	72" (1829)	6	180,000 (53)	(396) 875

MANIFOLD PRESSURE		MANIFOLD SIZE
NATURAL GAS	PROPANE GAS	
5.0" W.C.	10.0" W.C.	3/4" (19 mm)

Specify elevation, if over 2,000 ft.

MODEL	GRIDDLE PLATE DIMENSIONS		OVERALL DIMENSIONS			CRATED DIMENSIONS		
	WIDTH	DEPTH	WIDTH	HEIGHT	DEPTH	WIDTH	HEIGHT	DEPTH
IGG-24	24" (610)	24" (610)	24" (610)	14" (356)	32 3/8" (822)	26 1/2" (673)	16 1/2" (419)	36" (914)
IGG-36	36" (914)	24" (610)	36" (914)	14" (356)	32 3/8" (822)	38 1/2" (978)	16 1/2" (419)	36" (914)
IGG-48	48" (1219)	24" (610)	48" (1219)	14" (356)	32 3/8" (822)	50 1/2" (1283)	16 1/2" (419)	36" (914)
IGG-60	60" (1524)	24" (610)	60" (1524)	14" (356)	32 3/8" (822)	62 1/2" (1588)	16 1/2" (419)	36" (914)
IGG-72	72" (1829)	24" (610)	72" (1829)	14" (356)	32 3/8" (822)	74 1/2" (1892)	16 1/2" (419)	36" (914)

Measurements in () are metric equivalents

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.



OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- Open burners available, set of 2 burners, add 12" (305 mm) to width and "OB-2" to model number)
- Open burners available, set of 4 burners, add 24" (610 mm) to width and "OB-4" to model number)
- 5" (127 mm) deep, stainless steel front landing ledge
- 7" (178 mm) deep, stainless steel front landing ledge
- Additional thermostat
- Extra grease can
- Rake for easily cleaning grooves



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates