SANDWICH UNIT REFRIGERATOR

Model: SW60N24M-HGL-D

Natural Refrigerant R-290 Model

60" Mighty Top Sandwich Unit Refrigerator with Drawers and Hinged Glass Lid - 24 Pans

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel interior	Optional caster sizes	
Stainless steel back	Rear-mounted cutting board	
Drawer locks	Composite cutting board	
Adjustable legs		

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Unique air flow distribution allows pan product to maintain 33° - 41°F Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor Expansion valve system

CABINET ARCHITECTURE

Smooth, polished chrome drawer handles Stainless steel roll-out drawers Magnetic snap-in drawer gaskets 8" deep, full length nylon cutting board Energy-efficient, 2 pane, low-e glass lid Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	
Stainless steel roll-out drawers Magnetic snap-in drawer gaskets 8" deep, full length nylon cutting board Energy-efficient, 2 pane, low-e glass lid Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	2" non-CFC polyurethane foam insulation
Magnetic snap-in drawer gaskets 8" deep, full length nylon cutting board Energy-efficient, 2 pane, low-e glass lid Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	Smooth, polished chrome drawer handles
8" deep, full length nylon cutting board Energy-efficient, 2 pane, low-e glass lid Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	Stainless steel roll-out drawers
Energy-efficient, 2 pane, low-e glass lid Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	Magnetic snap-in drawer gaskets
Aluminum glass frame with satin finish Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	8" deep, full length nylon cutting board
Concealed lid hinges Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	Energy-efficient, 2 pane, low-e glass lid
Integral stainless steel gas spring lid supports Completely enclosed, vented and removable case back	Aluminum glass frame with satin finish
Completely enclosed, vented and removable case back	Concealed lid hinges
	Integral stainless steel gas spring lid supports
5" casters	Completely enclosed, vented and removable case back
	5" casters

MODEL FEATURES

(24) 1/6 size recessed pans, 4" deep	
Removable interior tub below pans	
Electronic controller w/digital display & hi-low alarm	

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA 17.0 (481 cu l) Net Capacity (cu. ft.) 1/6 Size Pans (4" deep) 24 60 (1524 mm) Width, Overall (in.) Depth, Overall (in.) 35 (889 mm) (incl. top, cutting board & bumpers) Depth, Cutting Board (in.) 8 (203 mm) Height, Overall (in.) (incl. 5" casters) 36 13/16 (935 mm) No. of Drawers 4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2560

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	5.8 (4.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	368 (167 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 (1727 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Continental Refrigerator

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







Toll-Free: 800-523-7138 Phone: 215-244-1400

www.continentalrefrigerator.com

Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020 Model Plan Views



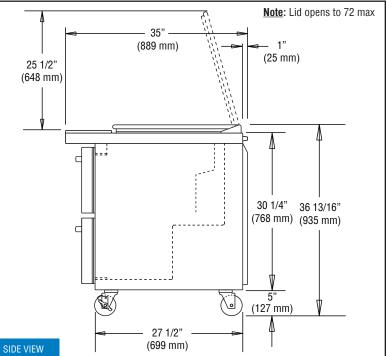

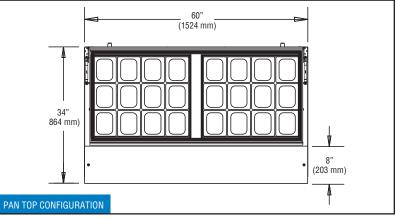

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.