



ELECTRIC

SPEC SERIES 36" RANGE/HOT TOP COMBOS



IHR-4-1HT-E

Shown with optional casters

MODEL NUMBERS

IHR-2HT-2-E
IHR-2HT-2-E-C
IHR-2HT-2-E-XB
IHR-2HT-2-E-M
IHR-4-1HT-E
IHR-4-1HT-E-C
IHR-4-1HT-E-M
IHR-4-1HT-E-XB

STANDARD OVEN

- High performance 5.3 KW element provides even heating throughout the oven.
- Exclusive heat deflector reflects heat into the oven, not the floor.
- Chef Depth interior is 26-1/2" w x 26" d x 14" h (673 x 660 x 356 mm) and accommodates 18" x 26" (457 x 660) sheet pans left-to-right and front-to-back.
- Porcelainized sides, rear, deck and inner door liner for easy cleaning.
- Superior heavy-duty door hinge.
- Side oven controls are protected from heat in an insulated side compartment
- Stamped inner door liner provides extra strength while improving heat retention.
- One chrome oven rack is included.

CONVECTION OVEN

- 1/4 hp blower motor.
- Stainless steel door gasket
- Three position switch for cooking or cool down
- "On" indicator light and one hour manual timer. Fan shuts off automatically when door is open.
- Three oven racks.

ELECTRIC ROUND PLATE ELEMENTS

- Sealed 2.6 KW round plate elements with easy-to-clean surface
- Provides a solid flat surface for fast, even heating
- Plates are 9" (229) diameter for maximum pan contact
- Top design helps prevent spills from entering unit making clean-up easier
- Infinite heat controls for maximum cooking flexibility




1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



ELECTRIC

SPEC SERIES 36" RANGE/HOT TOP COMBOS

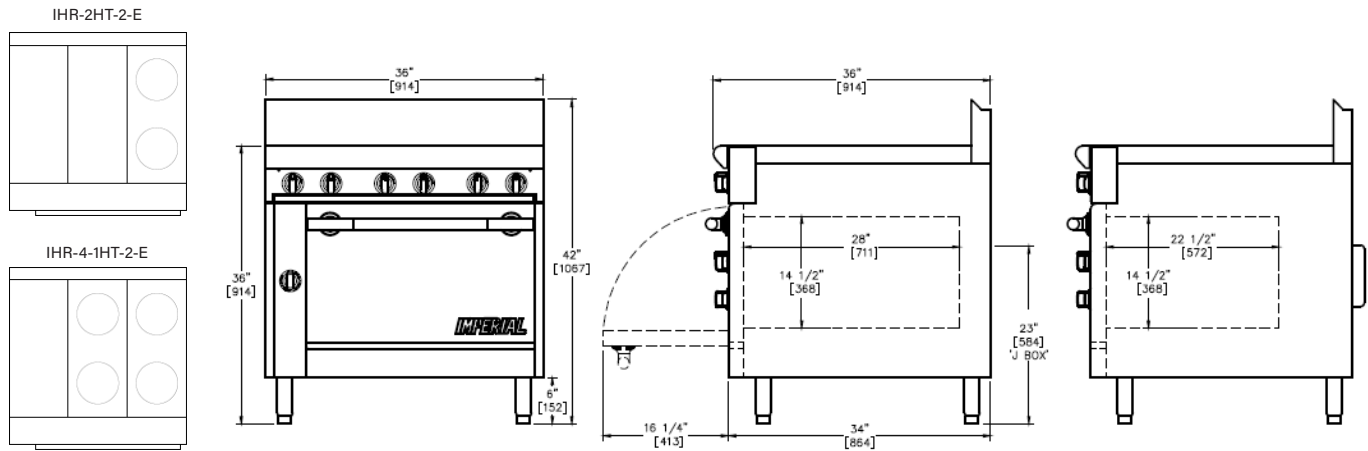

DIMENSIONS: 36" (914) W x 38" (965) D

ELECTRICAL REQUIREMENTS

MODEL	TOTAL KW	VOLTS	PHASE	AMPS	SHIP WEIGHT
IHR-2HT-2-E	18.5	208	3	56	(281) 619
		240	3	49	(281) 619
		*480	3	25	(281) 619
IHR-2HT-2-E-C	19.5	208	3	60	(308) 679
		240	3	52	(308) 679
		*480	3	26	(308) 679
IHR-2HT-2-E-XB	13.2	208	3	39	(204) 449
		240	3	34	(204) 449
		*480	3	17	(204) 449
IHR-2HT-2-E-M	13.2	208	3	39	(156) 344
		240	3	34	(156) 344
		*480	3	17	(156) 344

*Additional charge

Notes: Measurements in () are metric equivalents.

MODEL	TOTAL KW	VOLTS	PHASE	AMPS	SHIP WEIGHT
IHR-4-1HT-E	19.7	208	3	61	(273) 602
		240	3	53	(273) 602
		*480	3	27	(273) 602
IHR-4-1HT-E-C	20.7	208	3	65	(300) 662
		240	3	56	(300) 662
		*480	3	28	(300) 662
IHR-4-1HT-E-XB	14.4	208	3	50	(196) 432
		240	3	43	(196) 432
		*480	3	22	(196) 432
IHR-4-1HT-E-M	14.4	208	3	50	(148) 327
		240	3	43	(148) 327
		*480	3	22	(148) 327

*Additional charge

ELECTRIC CONVECTION OVEN OPTIONS

- Cook and Hold Feature
- Heavy Duty Casters, set of 4
- Stainless Steel Bottom Shelf and Adjustable Rack Supports
- Extra Standard Depth Oven Racks
- 480 volt motor
- Stainless Steel solid doors available at no additional charge.

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2 1/4" (57 mm) overhang is required when curbsmount-ed. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

Two speed motor - 1/2 HP, 1725/1140 RPM.



MADE IN USA



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates