

INSTINCT Griddle

Induction grill (table-top), 2-zone 618 x 577 mm

Models

□ INSTINCT Griddle 10



INSTINCT Griddle 10

- Realtime Temperature Control System RTCsmp
- Temperature setting from 50–230°C
- Special 2-zone induction non-stick griddle
- Timer function
- Specially energy efficient
- Specially short heat-up time
- Completely uniform heat distribution
- Instantaneous control of the frying temperature with no lag
- Convenient and reliable


Properties

- Significantly reduced energy consumption thanks to high-efficiency induction technology with optimised energy transfer between the griddle and the food product
- Specially developed induction griddle with HPCR stainless steel surface protection
- Contactless multi-point temperature measurement and temperature control accurate to one degree over the entire cooking time and the entire cooking surface for optimal frying results thanks to RTCsmp technology.
- Convenient frying without heating up the surroundings thanks to direct heat transfer from the griddle to the food product by means of induction
- Especially high operational safety and reliability due to numerous protective features
- Short heat-up time from 20 – 200 °C in 3 ½ minutes
- Easy to clean thanks to a removable, washable and reusable air filter
- Exceptionally robust and developed for continuous operation in the restaurant industry
- Reduction of the maximum power from 100 % to 25 %
- Warranty: 2 years on all parts

Included Features

- RTCsmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter insert
- Spatter guard
- Spatula
- Stainless steel sponge



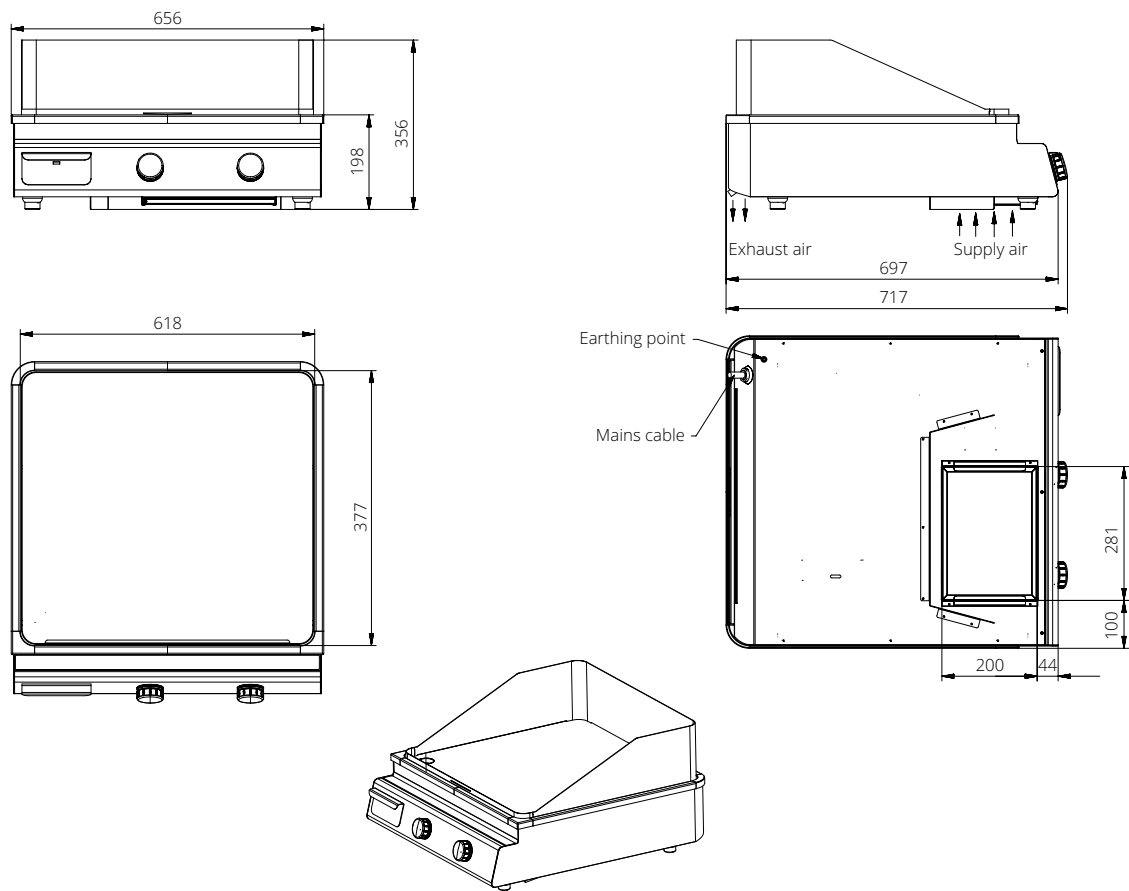

All dimensions in mm

Number of zones	2
Griddle B x D	618 x 577 mm
Temperature setting	50 to 230°C
Housing	Stainless steel

Model	INSTINCT Griddle 10
Power, watts	2 x 1250–5000 (can be reduced individually)
Electrical supply V/Hz	380–440/50–60/3 208/50–60/3
Dimensions B x D x H mm	656 x 717 x 198 mm
Weight, kg	48