



Model

EP15 & NA15

Product Description

EP15 (Peeler, 6.8Kg, Medium Duty, Painted Finish)

NA15 (Peeler, 6.8Kg, Medium Duty, Aluminium Finish)

Product Code

5P151 (EP15)


5P153 (NA15)



Standard Features

- 6.8kg (15lb) medium duty potato peelers constructed from food grade, non-corrosive aluminium alloy casting
- Spindle housing and chute cast integrally, eliminating joints and possible leakage
- Available in natural aluminium or a grey hammer paint finish
- Sink-top / counter-top, pedestal or trolley mounted
- Optional pedestal is 90cm high, making the discharge chute 94cm (37") high (sink height)
- Complies with all relevant safety standards and designed for ease of maintenance and cleaning
- All bearings are grease packed and permanently sealed therefore no lubrication required
- V-belt driven for noiseless transmission, with provision for belt tensioning if required
- Rotor plate coated on both sides, doubling its life. Fine grained abrasive for new potatoes on one side and coarse grained for regular potatoes on the other
- Inside wall of peeling chamber has patented cast-in abrasive serrations which dispenses with the need for abrasive coating. Consequently, there is less potato loss during both peeling and boiling and the efficiency of the serrations will last the life of the machine
- Lid removable without tools so that the rotor plate can be lifted out for cleaning. To clean the chamber, turn on water and the whole chamber is flushed clean
- Water inlet: hose union with nozzle and provision for fitting on either side
- Waste/water outlet: tapped 1½ BSP ready for waste pipe to be connected. Provision for fitting on either side
- CE Approved

Dimensions

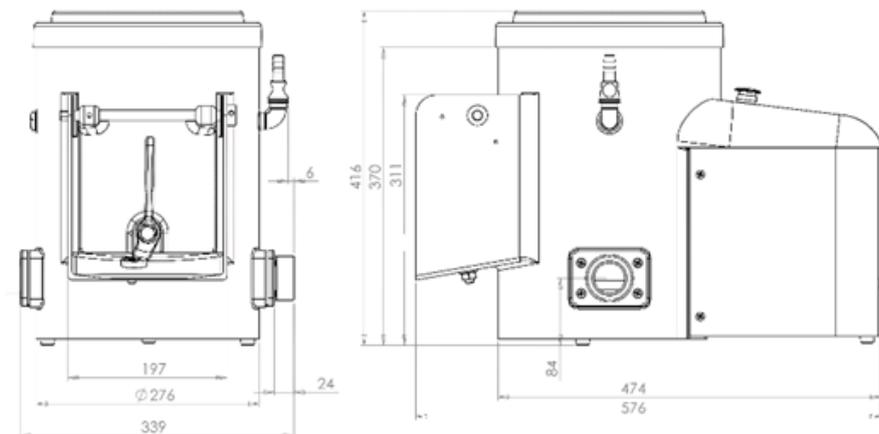

Specifications

Model	EP15	NA15
Product Code	5P151	5P153
Capacity (kgs)	6.8	6.8
Output per hour (kgs)	60	60
Finish	Grey hammer painted	Natural aluminium
Belt or Gear Driven	Belt driven	Belt driven
Phase (Ø)	Single	Single
Motor (Volt)	220	220
Frequency (Hz)	50	50
Current (Amp)	2.8	2.8
Power (kW / hp)	0.25 / 0.33	0.25 / 0.33
Power Connection	13 Amp (3 Pin Plug)	13 Amp (3 Pin Plug)
Items Included	Lifting hook, box spanner, water inlet	Lifting hook, box spanner, water inlet
Optional Accessories	Pedestal (9T20) Mobile Trolley (9T21) Guarded Discharge Chute, painted (9T19) Small Waste Disposal Adaptor (9T17) Sink Skip (TS06) Length of Waste Pipe, Elbow & Coupling (9T18) 3' Length Water Inlet Hose & Tap Connector (9P64) Installation Kit (Sink skip, Length of Waste Pipe, Elbow & Coupling, 3' Length Water Inlet Hose & Tap Connector) (9T28) Tundish (9T25)	Pedestal (9T20) Mobile Trolley (9T21) Guarded Discharge Chute, s/s (9T24) Small Waste Disposal Adaptor (9T17) Sink Skip (TS06) Length of Waste Pipe, Elbow & Coupling (9T18) 3' Length Water Inlet Hose & Tap Connector (9P64) Installation Kit (Sink skip, Length of Waste Pipe, Elbow & Coupling, 3' Length Water Inlet Hose & Tap Connector) (9T28) Tundish (9T25)
Overall Dimensions D x W x H (mm)	576 x 339 x 416	576 x 339 x 416
Net Weight (Kg)	30	30
Packed Dimensions D x W x H (mm)	665 x 365 x 480	665 x 365 x 480
Packed Weight (Kg)	34	34
Volume (m3)	0.04	0.04
Warranty	1 year	1 year

We reserve the right to alter the specification and technical details for this item at any time without prior notice.

8/2025

Metcalfe Catering Equipment Ltd

Haygarth Park
 Blaenau Ffestiniog
 Gwynedd, LL41 3PF

