

# G1808X, G1838X and G1848X GAS CHIEFTAIN FRYERS



G1838X fryer

## KEY FEATURES

- Accurate temperature control and recovery  
- *efficient high yield performance*
- Supplied with lid as standard  
- *protects and extends life of oil*
- Burner lit by spark ignition  
- *easy and safe to operate*
- Fitted with safety thermostat as standard  
- *cuts off gas in the event of emergency*
- All stainless steel finish (*interior and exterior*)  
- *easy to clean*
- Available on castors  
- *specify at time of order*

## MODELS and ACCESSORIES

**G1808X** single pan, single basket fryer

**G1838X** single pan, twin basket fryer

**G1848X** twin pan, single basket (*per pan*) fryer

- Side screen
- Hob capper
- Factory fitted castors

## INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.


A clearance of 150mm between appliance and any combustible wall and a minimum vertical clearance of 1220mm above the top edge of flue should be observed.





# G1808X, G1838X and G1848X GAS CHIEFTAIN FRYERS

## MODEL DIMENSIONS (in mm)

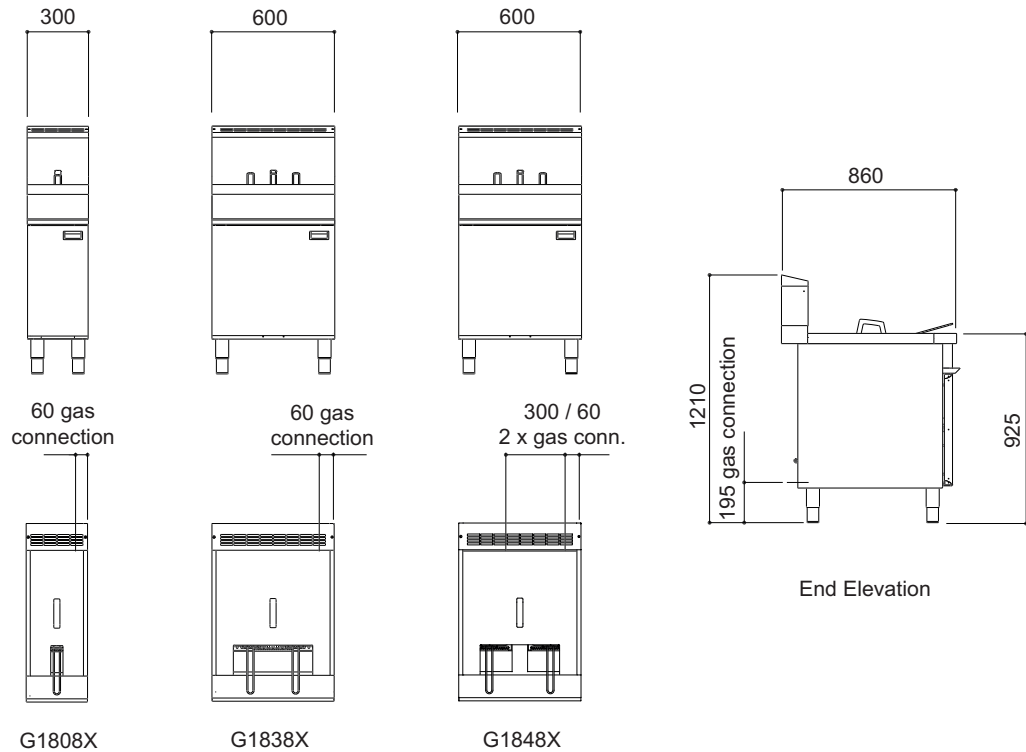

\* btu/hr ratings are gross values

## SPECIFICATION DETAILS

|                                       | <b>G1808X</b> | <b>G1838X</b> | <b>G1848X</b>                                      |
|---------------------------------------|---------------|---------------|----------------------------------------------------|
| Oil capacity (litres)                 | 15            | 24            | 15 x 2                                             |
| Hourly chip output (kg)               | 32            | 55            | 36 x 2                                             |
| Gas rating (kW)                       | 16.7          | 30            | 16.7 x 2                                           |
| Gas rating (Btu/hr)                   | 62,700        | 112,600       | 62,700 x 2                                         |
| Gas inlet (Natural/Propane)           | 1/2" BSP      | 3/4" BSP      | 1/2" BSP x 2<br>(terminating in 3/4" BSP manifold) |
| Flow rate - Nat. (m <sup>3</sup> /hr) | 1.75          | 3.14          | 1.75 x 2                                           |
| Flow rate - Prop. (kg/hr)             | 1.23          | 2.22          | 1.23 x 2                                           |
| Gas pressure (Natural)                | 13mbar        | 11.2mbar      | 13mbar                                             |
| Gas pressure (Propane)                | 37mbar        | 37mbar        | 37mbar                                             |
| Weight (kg)                           | 64            | 92            | 116                                                |
| Packed weight (kg)                    | 70            | 102           | 126                                                |