



solo per professionisti

Sirman Spa
Viale dell'industria 9/11
35010 Pieve di Curtarolo (PD) Italy
Tel. +39 049 9698666
Fax. +39 049 9698688
E-mail. info@sirman.com

VORTEX 43



- Highly effective patented cooling system.
- Sturdy and light weight fiberglass ABS body.
- Ergonomic handle.
- Rubber buffer between motor and shaft.
- High efficiency motors.
- 3 controls available:
 - one speed
 - drill like speed control
 - Variotronic: speed control with stabilizer
- Safety device preventing switching on by mistake.
- Trigger switch for continuous blending.
- 3 different motors.
- IPX3 protection.
- Quick coupling device.
- Shafts available in 2 length: 35 and 45 cm.
- Completely demountable shafts for an accurate cleaning and a longer life.
- Completely stainless steel shaft and bell.
- Optional:
 - storage case
 - pot support
 - wall attachment
 - exposition shelf
 - whisk
- Whisk metal gearings.
- Demountable and dishwashing safe whisk.

DETAILS



Vortex container




Shafts and Whisk



Removable knives and shaft

TECHNICAL DATA

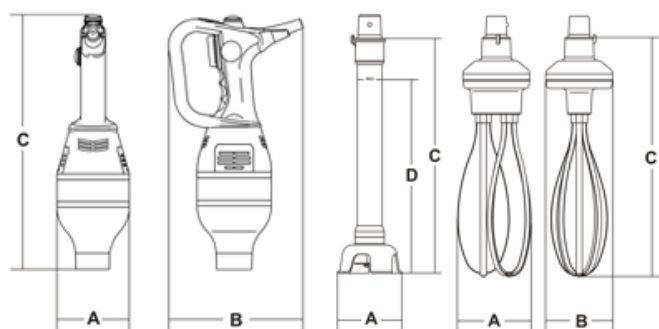

Model	Vortex 43	Vortex 43 VV	Vortex 43 VT	Aste 35-45	Frusta
Power	watt 430	watt 430	watt 430	-	-
Power source	Hp 0,60	Hp 0,60	Hp 0,60	-	-
Knifes revolutions	230V/50Hz	230V/50Hz	230V/50Hz	-	-
	r.p.m.	r.p.m.	r.p.m.	-	-
A	14.000	0÷14.000	1.000÷14.000	-	-
B	mm 125	mm 125	mm 125	ø mm 100	mm 117
C	mm 190	mm 190	mm 190	-	mm 113
D	mm 377	mm 377	mm 377	35 = mm 364	mm 385
	-	-	-	45 = mm 459	-
Net weight	-	-	-	35 = mm 300	-
	-	-	-	45 = mm 400	-
Shipping	-	-	-	35 = Kg 1,2	kg 1,2
	-	-	-	45 = Kg 1,6	-
	-	-	-	35=mm490x230x150	-
	-	-	-	45=mm590x230x150	-

Gross weight

kg 3

kg 3

kg 3

35 = Kg 1,8
45 = Kg 2,1

kg 1,6