

# Single & Double Stock Pot Stoves

## Standard Features

- Stainless steel sides and front valve cover
- Full width, removable stainless steel drip pan for easy cleanup
- Heavy duty cast iron top grates
- Heavy duty cast iron three-ring burner, rated at a total of 80,000 BTU/hr
- Cast iron burners and top grates
- Stainless steel tubing for pilots and pilot tips per burner ring
- Each burner is equipped with two continuous pilots
- Two manual controls to operate the inner and outer rings independently
- Stainless steel legs standard
- 3/4" NPT rear gas connection and regulator standard

## MODELS:

ATSP-18-1 / ATSP-18-2 / ATSP-18-1L / ATSP-18-2L

**ATSP-18-1**



**ATSP-18-1L**



**ATSP-18-2**



**ATSP-18-2L**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI  
STD Z83.11-2009 (2011)  
Certified to CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



**SPECIFICATIONS**


Models	Burners and control method	Gas type	Intake-tube pressusre(in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Net weight(lbs)	Gross weight(lbs)
ATSP-18-1	2 Burners Independent Manual Control	NG	4	40,000	80,000	4" w.c.	105.8	119
		LP	10	40,000	80,000	10" w.c.		
ATSP-18-2	4 Burners Independent Manual Control	NG	4	40,000	160,000	4" w.c.	201.7	221.6
		LP	10	40,000	160,000	10" w.c.		
ATSP-18-1L	2 Burners Independent Manual Control	NG	4	40,000	80,000	4" w.c.	103.6	116.8
		LP	10	40,000	80,000	10" w.c.		
ATSP-18-2L	4 Burners Independent Manual Control	NG	4	40,000	160,000	4" w.c.	198.4	220.5
		LP	10	40,000	160,000	10" w.c.		

**PLAN VIEW**

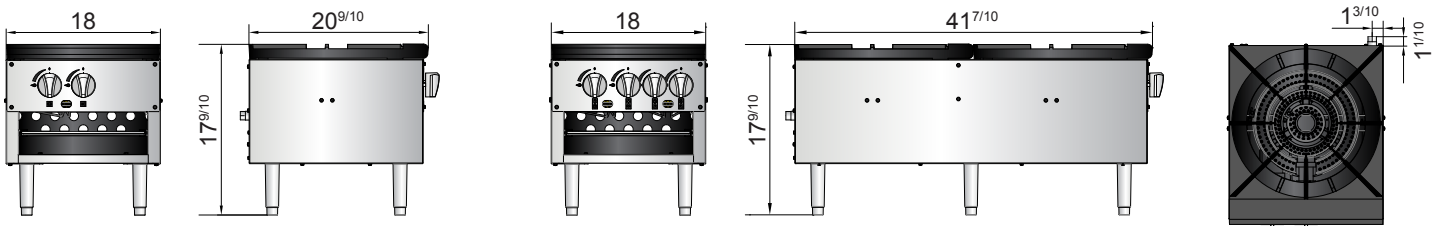

**ATSP-18-1L**

**ATSP-18-2L**

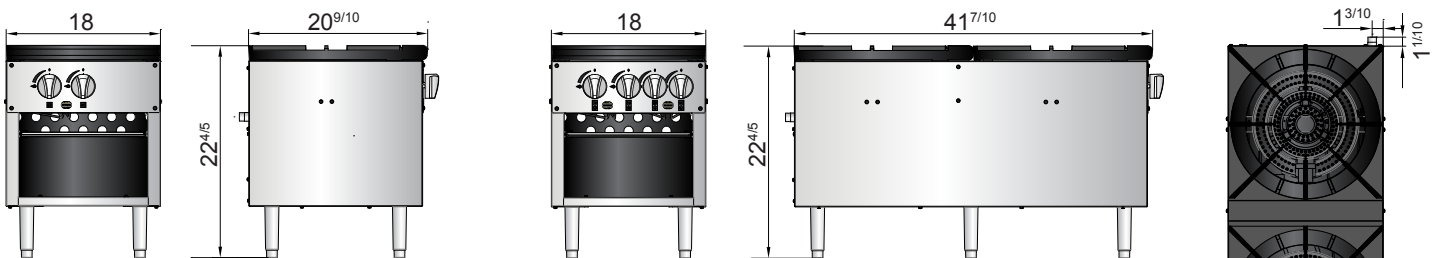

**ATSP-18-1**

**ATSP-18-2**

