

80 litre GAS MANUAL BRAISING PAN. WITH STAINLESS STEEL BOTTOM

Project:
Rev.:
Zone:
Location:



CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. It guarantees high performance, exceptional firing uniformity. Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

AISI 304 stainless steel cooking vessel, 2 mm thick.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

Heating by chrome-plated steel burner.

Safety valve with thermocouple, electric ignition.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

80 litre GAS MANUAL BRAISING PAN. WITH STAINLESS STEEL BOTTOM

Project:
Rev:
Zone:
Location:



CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990699
DEFINITION	D94/10 KBGI BRAISING PAN GAS M80 STAINLESS STEEL
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	147,000 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	840,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1170,000 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	162,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,015 kW
GAS POWER	20,00
GAS POWER (G25.3/25mbar)	19,00
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 KBGI

80 litre GAS MANUAL BRAISING PAN. WITH STAINLESS STEEL BOTTOM

Project:
 Rev:
 Zone:
 Location:


CODICE
 CR0990699

MODELLO
 D94/10KBGI

SERIE
 DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

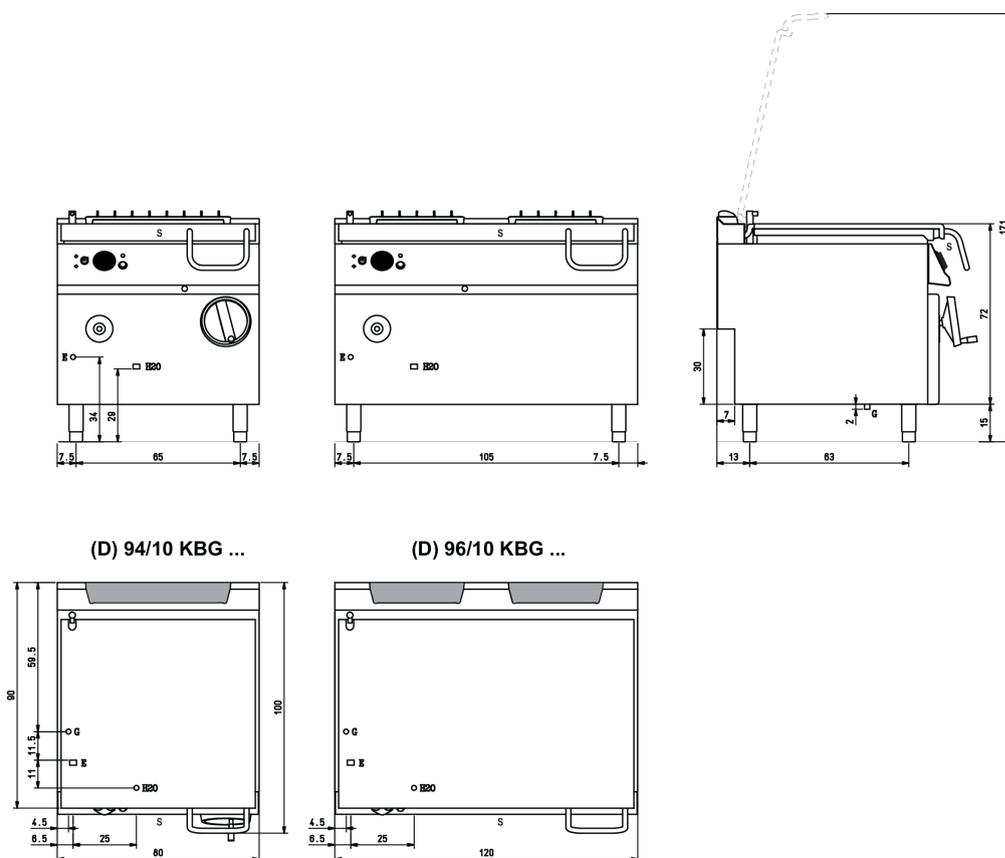

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Scarico vasca - Wannabflussrohr - Pan outlet
 Vidange du bac - Descarga cuba - Water toevoer

80 litre GAS MANUAL BRAISING PAN. WITH STAINLESS STEEL BOTTOM

Project:
Rev:
Zone:
Location:



CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



80 litre GAS MANUAL BRAISING PAN. WITH STAINLESS STEEL BOTTOM

Project:
Rev:
Zone:
Location:



CODICE
CR0990699

MODELLO
D94/10KBGI

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment