


- Double Ball Bearing Raceway for Long Wear and Added Strength
- Zinc Plated
- Raceway Dust Cover
- Thread Covered Not On Solid Wheels. (i.e. Polyolefin, Hard Rubber & Phenolic Wheels)

APPLICATIONS

- Work Tables
- Bakery Equipment
- Food Service Operations
- Displays
- Maintenance Carts
- Office Equipment

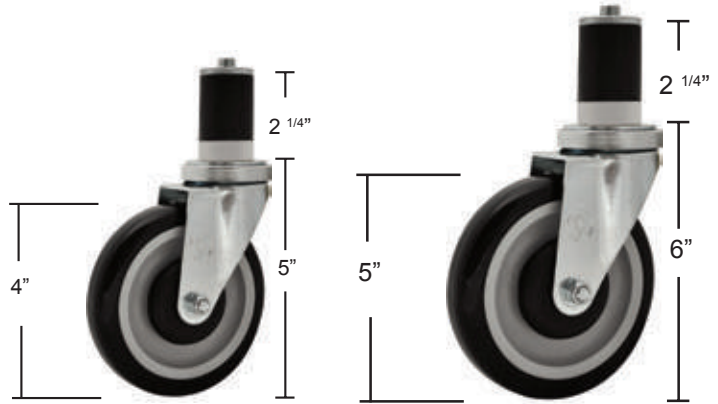

1-5/8" Stem Work Table Caster

- Fits Standard 1-5/8" Tubing
- 4" or 5" Polyurethane Wheel Resistant to Acids & Caustics
- Temperature Range -45° to 180°F
- Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4 or 6) in POP Box



| Part # | Description |
|-----------------|---|
| 5SBR-RA-PLY-PS4 | (4) 5" Polyurethane Wheel w/ Top Lock Brake |
| 5SBR-RA-PLY-PS6 | (6) 5" Polyurethane Wheel w/ Top Lock Brake |
| 5SBR-RA-PLY | 5" Polyurethane Wheel |
| 5SBR-RA-PLY-TLB | 5" Polyurethane Wheel w/ Top Lock Brake |
| 4SBR-RA-PLY | 4" Polyurethane Wheel |
| 4SBR-RA-PLY-TLB | 4" Polyurethane Wheel w/ Top Lock Brake |

1-5/8" Stem Work Table Caster

- Fits Standard 1-5/8" Tubing
- 5" Polyolefin Wheel Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F
- Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4 or 6)



| Part # | Description |
|-----------------|---|
| 5SBR-RA-LDP-PS4 | (4) 5" Polyolefin Wheel w/ Top Lock Brake |
| 5SBR-RA-LDP-PS6 | (6) 5" Polyolefin Wheel w/ Top Lock Brake |
| 5SBR-RA-LDP | 5" Polyolefin Wheel |
| 5SBR-RA-LDP-TLB | 5" Polyolefin Wheel w/ Top Lock Brake |



Hard Rubber Wheel

- Temperature Range -40° to 160°F



Gray Rubber Wheel

- Resistant to Oil, Grease, Water & Most Solvents
- Temperature Range -45° to 180°F



Phenolic Wheel

- Resistant to Oil & Grease
- Temperature Range -50° to 250°F

| Part # | NSF | Description | Weight Capacity |
|----------------|-----|---|-----------------|
| 5SBR-RA-HR | ✓ | 5" Hard Rubber Wheel Caster | 300# |
| 5SBR-RA-HR-TLB | ✓ | 5" Hard Rubber Wheel Caster w/ Top Lock Brake | 300# |
| 5SBR-RA-GR | ✓ | 5" Gray Rubber Wheel Caster | 250# |
| 5SBR-RA-GR-TLB | ✓ | 5" Gray Rubber Wheel Caster w/ Top Lock Brake | 250# |
| 5SBR-RA-PH | ✓ | 5" Phenolic Wheel Caster | 350# |
| 5SBR-RA-PH-TLB | ✓ | 5" Phenolic Wheel Caster w/ Top Lock Brake | 350# |