



## REACH-IN BOTTOM-MOUNT SERIES FREEZERS

### Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Freezer door frames have integral factory installed heating element to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. IB27F door swing is field reversible
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel
- Interior: 304 stainless steel
- Temperature: 0 to -10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug IB81F-DV: 115/208-230/60/1 with NEMA L14-20P plug, 10ft cord
- Refrigerant: R290



IB27F\*



NEMA  
5-15P



IB54F\*



NEMA  
L14-20P



IB81F-DV

### Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.



Certified to ANSI/NSF-7 Standards

Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
IB27F*	1	26.8 X 32.7 X 82.3	22.2 X 27.6 X 50.2	8	1/2	329 lbs
IB54F*	2	53.9 X 32.7 X 82.3	49.4 X 27.6 X 50.2	9	1	501 lbs
IB81F-DV	3	81.0 X 32.7 X 82.3	76.4 X 27.6 X 50.2	9	1 1/4	625 lbs



CANADA  
Tel: 514-737-9701 888-275-4538  
Fax: 514-342-3854 877-453-8832

sales@mvpgroupcorp.com

USA  
Tel: 786-600-4687 844-218-8477  
Fax: 786-661-4100

www.mvpgroupcorp.com




# REACH-IN BOTTOM-MOUNT SERIES FREEZERS




Dimensions in inches (mm)

IB27F\*

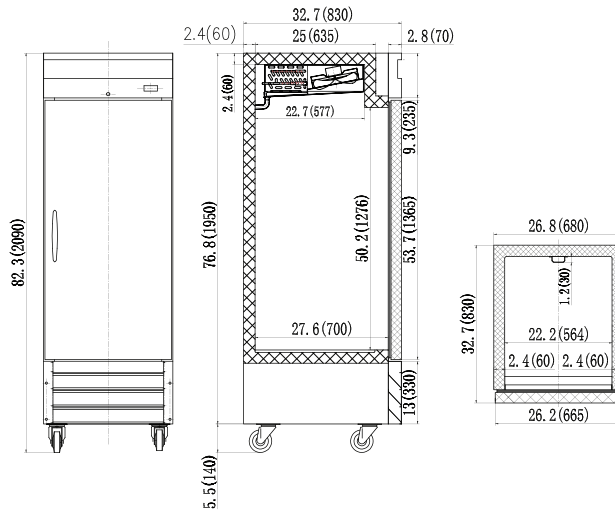

IB54F\*

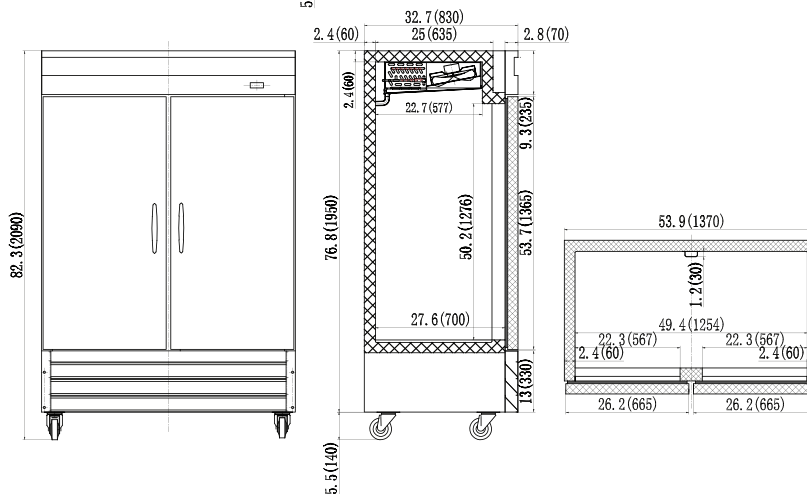

IB81F-DV

