



Project _____
 AIA # _____ SIS # _____
 Item # _____ Quantity _____ C.S.I. Section 114000

R/A Series

24" Wide Reach-In Freezer
 32" Deep, Solid Door, Self-Contained



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

AVAILABLE CONFIGURATIONS

R Series Models

RLT132DUT-FHS
 RLT132DUT-HHS

Door(s)

Full Height Solid
 Half Height Solid

A Series Models

ALT132DUT-FHS
 ALT132DUT-HHS

Door(s)

Full Height Solid
 Half Height Solid

STANDARD PRODUCT FEATURES

- R = Stainless Steel Exterior & Interior
- A = Stainless Steel Exterior & Anodized Aluminum Interior
- Variable Speed Compressor Adapts to the Work Environment
- Traulsen's Smart Control™ with LED Display
- -10°F Capable in up to 100°F Ambient
- Balanced, Self-Contained Refrigeration System Using R-290
- Full or Half-Length Stainless Steel Door(s) with Lock(s)
- Anti-Condensate Door Perimeter Heater
- Self-Closing Door with Stay Open Feature
- Standard Door Hinging: 132D = Right (other hings available)
- Automatically Activated LED Lights
- Stainless Steel Breaker Caps
- Three Adjustable, Coated Wire Shelves Per Section, Supported on Shelf Pins (factory installed)
- Magnetic Snap-In EZ-Clean™ Door Gasket
- Gasket-Protecting Raised Door Liner
- Thermostatic Expansion Valve Metering Device
- Stainless Steel One-Piece Louver Assembly
- 9' Cord & Plug Attached
- Set of (4) 6" High Adjustable Stainless Steel Legs

ACCESSORIES & OPTIONS

- SmartConnect™ Monitoring App with Wi-Fi Connectivity
- Stainless Steel Finished Back with Rear Louvers
- Option to Relocate Electrical Box
- #1 Type Trayslides to Accommodate either (1) 18" x 26" or (2) 14" x 18" Pans
- Additional Coated Wire or Optional Stainless Steel Shelves
- Stainless Steel Banking Strip
- EZ-Open™ Foot Pedal (full height doors only)
- Positive Action Latch (consult factory)
- Optional 220/50/1 or 208-230 Voltages (consult factory)
- Kool Klad™ Exterior Laminate Decor (consult factory)
- Set of (4) 4 1/8" or 6" High Casters in Lieu of Legs
- 6" Stainless Steel Flanged Legs
- Other Support Options: 4 1/2" High Base or 6" High Kickplate (for use with standard legs)
- Heat Shield
- Remote Glycol Application (consult factory)

- GUARANTEED FOR LIFE CAM-LIFT HINGES
- GUARANTEED FOR LIFE HORIZONTAL WORK FLOW DOOR HANDLES (SOLID DOORS ONLY)

*Remote application available,
 see form TR35837 for details.



ENERGY STAR® Listed Commercial Freezer
 For full listing visit energystar.gov

Approved by _____ Date _____ Approved by _____ Date _____





R/A Series

24" Wide Reach-In Freezer
32" Deep, Solid Door, Self-Contained

MODELS:

RLT132DUT-HHS, RLT132DUT-FHS
ALT132DUT-HHS, ALT132DUT-FHS

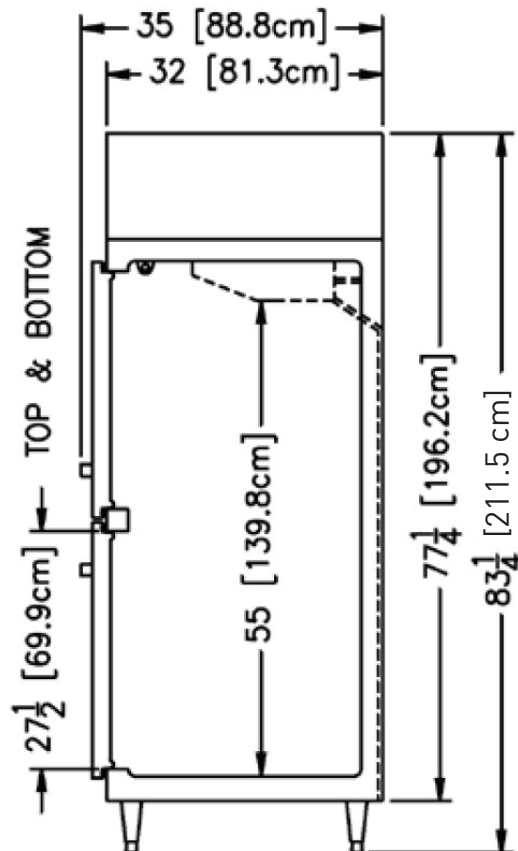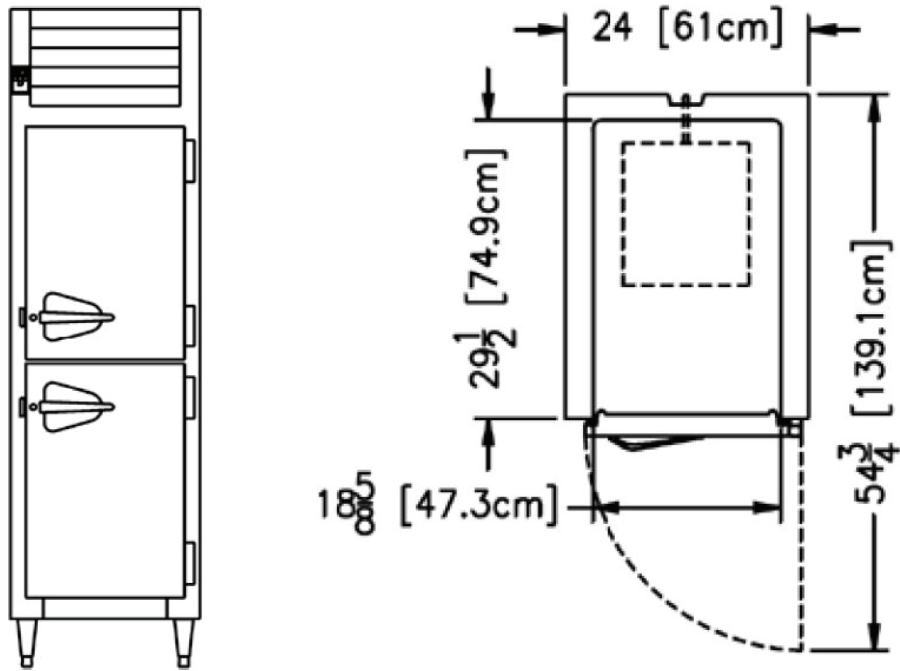

> CAD and/or Revit Files Available

<https://traulsen.klclcad.com/>



R/A Series

24" Wide Reach-In Freezer
32" Deep, Solid Door, Self-Contained

MODELS:

RLT132DUT-HHS, RLT132DUT-FHS
ALT132DUT-HHS, ALT132DUT-FHS

EQUIPMENT SPECIFICATIONS

| MODELS | R/ALT132DUT |
|---|--------------------------|
| DIMENSIONAL DATA | |
| Net capacity cu. ft. | 18.11 [512.82 cu l] |
| Length - overall in. | 24" [61 cm] |
| Depth - overall in. | 35" [88.8 cm] |
| Depth - door open 90° in. | 54 3/4" [139.1 cm] |
| Depth - over body in. | 32" [81.3 cm] |
| Clear door width in. | 18 5/8" [47.3 cm] |
| Clear half-door height in. | 27 1/2" [69.9 cm] |
| Clear full-door height in. | 57 5/8" [146.3 cm] |
| Height - overall on 6" legs ² | 83 1/4" [211.5 cm] |
| No. Standard Shelves | 3 |
| Shelf area sq. ft. ³ | 10.73 [1 sq. m] |
| ELECTRICAL DATA | |
| Voltage Plug | 115/60/1 NEMA 5-15P |
| Full Load Amperes kWh/24HR ⁴ | 8 5.08; HHS 5.1; FHS |
| REFRIGERATION DATA | |
| Refrigerant | R-290 |
| Refrigerant Charge Amount oz. | 3 [85 g] |
| BTU/HR H.P. ¹ | 1950 1/2 |
| SHIPPING DATA | |
| Length - Crated in. | 48" [121.9 cm] |
| Width - Crated in. | 42" [106.7 cm] |
| Height - Crated in. | 85" [215.9 cm] |
| Volume - Crated cu. ft. | 99 [2803.4 cu l] |
| Weight - Crated lbs. | 450 [204.1 kg] |

NOTES: Figures in parentheses reflect metric equivalents.

- Based on a 90°F ambient and 20°F evaporator.
- 12" Top clearance preferred for optimum performance & service access.
- Area of standard shelf compliment only, does not include storage area of additional shelves or available on cabinet bottom.
- kWh/24HR = Kilowatt usage per 24 hours.

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug



CONSTRUCTION, HARDWARE, INSULATION

The R-Series interior is made from stainless steel while the A-Series interior is made from corrosion resistant anodized aluminum. For both series, the cabinet exterior front, one piece sides, louver assembly, door and door liner is constructed of heavy gauge stainless steel. The exterior cabinet top, back & bottom are constructed of heavy gauge galvanized steel. A set of four (4) adjustable 6" high stainless steel legs are included.

Door is equipped with a gasket protecting metal door pan, removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature. Hinges include a concealed switch to automatically activate the interior LED lighting. Guaranteed for life, work flow door handle is mounted horizontally over recess in door which limits protrusion from door face into aisles. Door has seamless, polished metal corners.

Gasket profile & EZ-Clean™ material simplify cleaning & increase overall gasket life. Anti-condensate heaters are located behind the door opening. Both the cabinet & door is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

SELF-CONTAINED REFRIGERATION SYSTEM

A top mounted, self-contained, balanced refrigeration system using environmentally friendly, low GWP R-290 refrigerant is conveniently located behind the one piece louver assembly. It features a thermostatic expansion valve, an air-cooled hermetic variable speed compressor, and an interior mounted ceiling coil. A 9' cord and plug is provided. Standard operating temperature is 0 to -5°F (all models are -10°F capable in up to 100°F ambient).

CONTROL

Traulsen's Smart Control™ features advanced control algorithms & sophisticated diagnostic capabilities to optimize performance. Utilizing smart sensors, it adapts the operation of the refrigeration system to a variety of environments & usage patterns. The Smart Control™ also offers a complete set of visual alarms designed to alert the user to critical events such as power outages or a prolonged door opening. In the event of an alarm, a dedicated Alarm LED will illuminate, informing the user of the critical event and duration.

INTERIOR

Standard interior arrangements include three (3) coated wire shelves per section, mounted on shelf pins. Shelves are full-width, and do not have any large gaps between them requiring the use of "bridge" or "junior shelves". Recommended load limit per shelf should not exceed 225 lbs. Optional tray slides may be purchased in combination with, or in lieu of these. Interior arrangements are installed at the factory and EZ-Change™ interior slides (only) are field installed.

WARRANTY

Both a six year parts and labor warranty and a seven year compressor warranty (self-contained models only) are provided standard.

CONTINUED PRODUCT DEVELOPMENT MAY NECESSITATE SPECIFICATION CHANGES WITHOUT NOTICE.