





Self-contained ice maker - Sprayer system Daily production up to 97 kg

Hotel
Restaurant
Fast food
Bar
Disco
Fish market
Supermarket
Medical & SPA
Industry

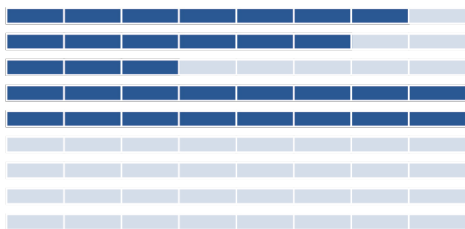

► Features

- High melt resistance & clear cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air cooled (water cooled option available)
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard voltages
- HFC Free - R290 Refrigerant
- Automatic Washing system
- Internal drain pump



Green-Tech Design



Side openings for better ventilation




Double water inlet (W models only)



Plug-in electrical connection

► Available ice cube size



Cube 23 grams
dimensions H 31.5 x L 32.5

► Prod. 24h

	Air temp.		Water temp.		kg	lbs
°C	10°C	50°F	7°C	45°F	97	214
	21°C	70°F	15°C	60°F	95	209

2 Years Warranty
subject to limitations

► Certifications available for this model






B95/55A HC DP



Self-contained ice maker - Sprayer system Daily production up to 97 kg

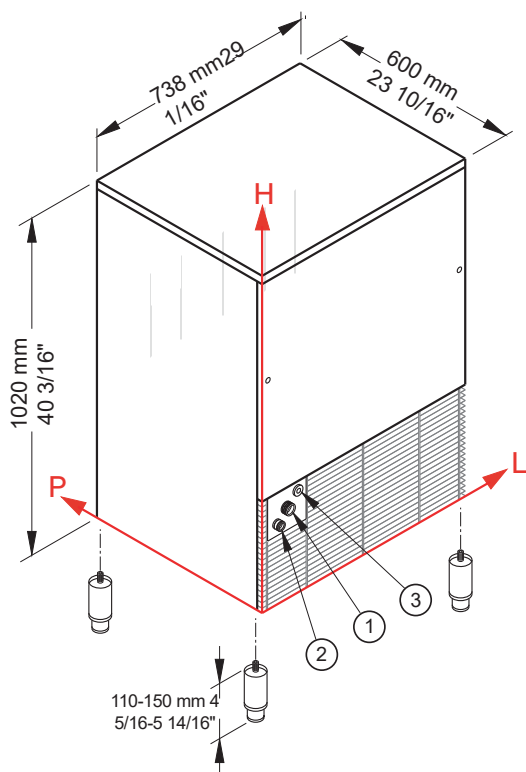

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performance

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	90 kg					
	50° F		198 lbs				
	21° C			95 kg			
	70° F				209 lbs		
	32° C					82 kg	
	90° F						181 lbs

► Connections

All measurements are referenced from the rear bottom-left corner (L-H-Ø)

- ① Water in.: 135 mm / 5 5/16" - 237 mm / 9 5/16" - 3/4"
- ② Water out.: 62 mm / 2 7/16" - 242 mm / 9 8/16" - 24 mm / 1 5/16"
- ③ Electrical connections: 100 mm / 3 15/16" - 312 mm / 12 5/16"

► Technical information

Production in 24h	95 kg / 209 lbs
Store capacity, up to	55 kg / 121 lbs
Cooling system	A
Kind of cube	23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	870 W
Fuse	10 A
Electrical consumption	23 kWh/100kg

Water consumption	A: 2.3 l/kg - 36 gal/100 lbs
	W: 16.5 l/kg - 197.7 gal/100 lbs
Sizes (L-P-H mm)	738 - 600 - 1020
(L-P-H in)	28 15/16 - 23 12/16 - 39 12/16
Sizes with pack (L-P-H mm)	780 - 640 - 1185
(L-P-H in)	30 11/16 - 25 3/16 - 46 10/16
Net weight	74 kg / 163 lbs
Gross weight	86 kg / 190 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet
Standard Cube (23 g)
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 02 - Issued June 2025



www.maidaid.co.uk

sales@maidaid-halcyon.co.uk

03457 308070